



ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137


TUSCALOOSA VAMC

VA PROJECT #: 679-22-100

PROJECT SITE MAP



PROJECT LOCATION MAP

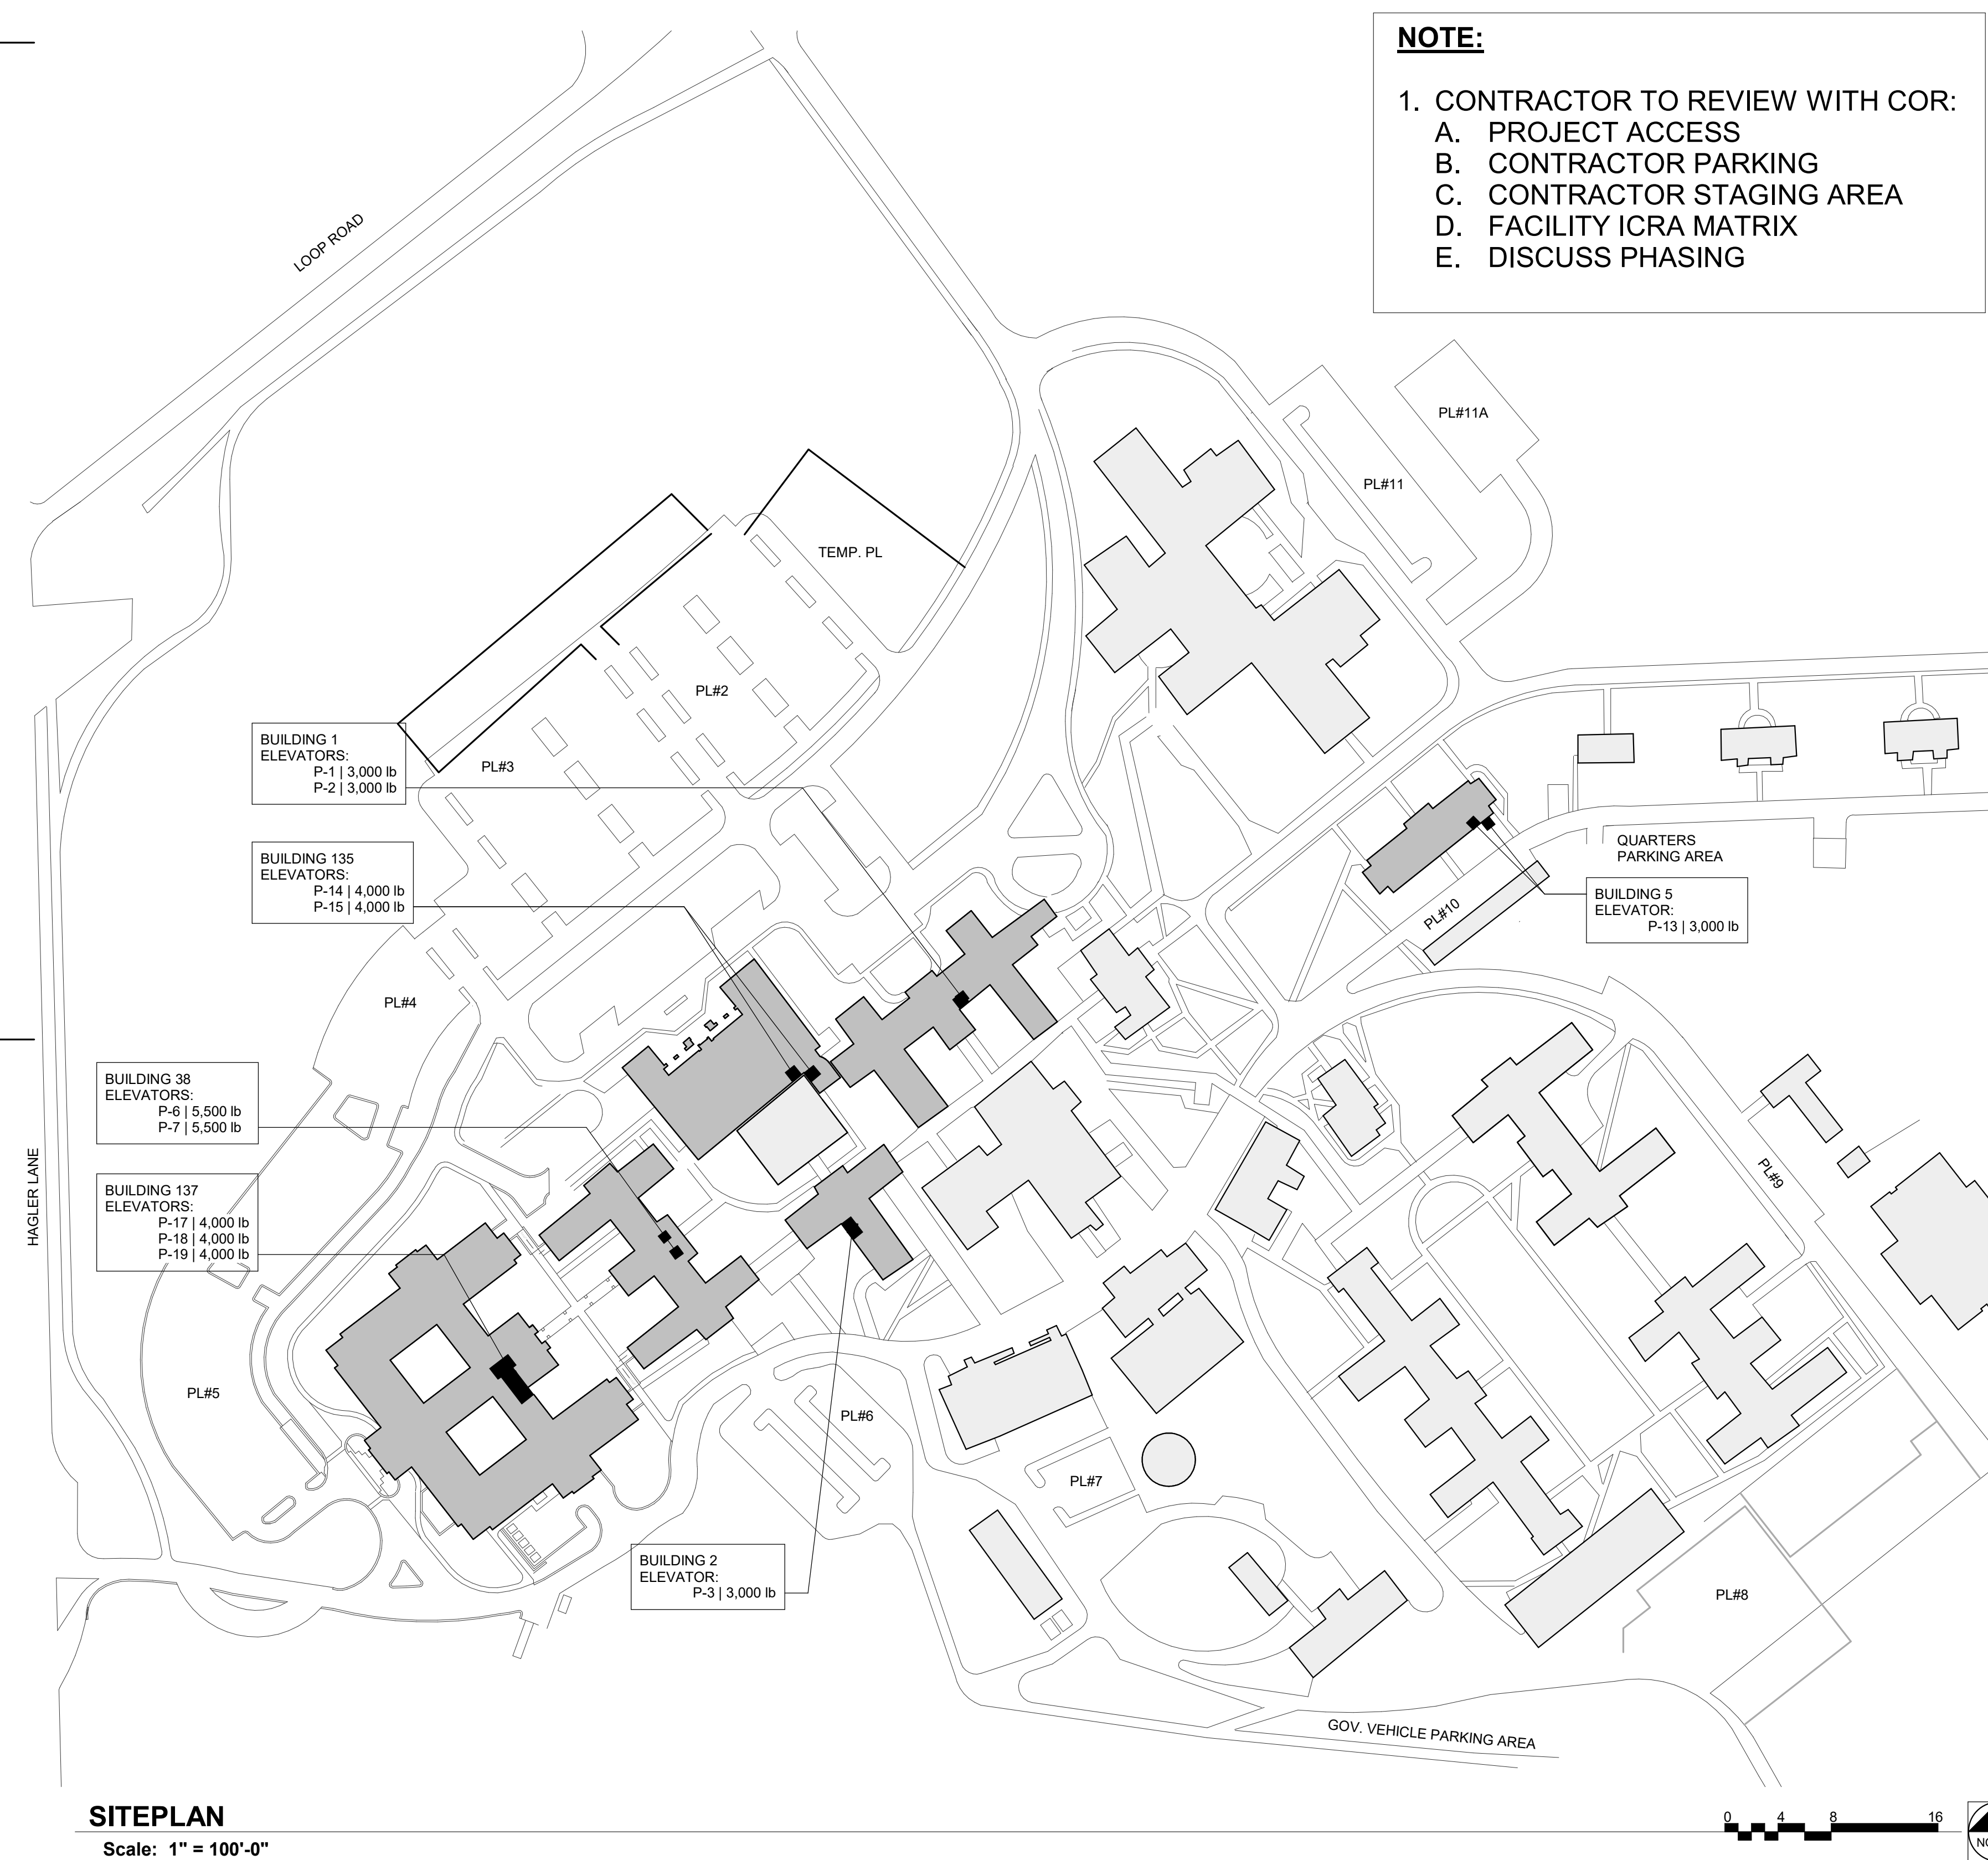

NOTE:

1. CONTRACTOR TO REVIEW WITH COR:
 - A. PROJECT ACCESS
 - B. CONTRACTOR PARKING
 - C. CONTRACTOR STAGING AREA
 - D. FACILITY ICRA MATRIX
 - E. DISCUSS PHASING

DRAWING LIST

GENERAL	COVER SHEET & DRAWING LIST	1	8
G-001	ICRA MATRIX AND DETAILS	2	8
G-002	BUILDING 1 OVERALL BASEMENT FLOOR PLAN	3	8
1.GL100	BUILDING 2 OVERALL BASEMENT FLOOR PLAN	4	8
2.GL100	BUILDING 5 OVERALL BASEMENT FLOOR PLAN	5	8
5.GL100	BUILDING 38 OVERALL BASEMENT FLOOR PLAN	6	8
38.GL100	BUILDING 135 OVERALL BASEMENT FLOOR PLAN	7	8
135.GL100	BUILDING 137 OVERALL BASEMENT FLOOR PLAN	8	8
137.GL100	ARCHITECTURAL	1	21
A-001	ARCHITECTURAL SYMBOLS, ABBREVIATIONS AND NOTES	2	21
1.A-100	BUILDING 1 PARTIAL FLOOR PLANS - P1 & P2	3	21
1.A-701	BUILDING 1 VERTICAL CIRCULATION SECTIONS & ELEVATIONS - P1 & P2	4	21
2.A-100	BUILDING 2 PARTIAL FLOOR PLANS & INT. ELEV. - P3	5	21
2.A-701	BUILDING 2 VERTICAL CIRCULATION SECTIONS AND ELEVATIONS - P3	6	21
5.A-100	BUILDING 5 PARTIAL FLOOR PLANS - P13	7	21
5.A-701	BUILDING 5 VERTICAL CIRCULATION SECTION AND ELEVATIONS - P13	8	21
38.A-100	BUILDING 38 PARTIAL FLOOR PLANS - P6 & P7	9	21
38.A-701	BUILDING 38 VERTICAL CIRCULATION SECTIONS AND ELEVATIONS - P6 & P7	10	21
135.A-100	BUILDING 135 PARTIAL FLOOR PLANS - P14 & P15	11	21
135.A-701	BUILDING 135 VERTICAL CIRCULATION SECTION AND ELEVATIONS - P14 & P15	12	21
137.A-100	BUILDING 137 PARTIAL FLOOR PLANS - P17-P19	13	21
137.A-701	BUILDING 137 VERTICAL CIRCULATION SECTIONS AND ELEVATIONS - P17-P19	14	21
A-601	DOOR SCHEDULE AND DETAILS AND ROOM FINISH SCHEDULE	15	21
A-801	BLDG 1 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS	16	21
A-802	BLDG 2 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS	17	21
A-803	BLDG 5 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS	18	21
A-804	BLDG 38 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS	19	21
A-805	BLDG 135 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS	20	21
A-806	BLDG 137 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS	21	21
MECHANICAL	MECHANICAL GENERAL INFORMATION	1	10
M-001	PLUMBING GENERAL INFORMATION AND DETAILS	2	10
M-002	BUILDING 1 PARTIAL MECHANICAL FLOOR PLANS - P1 & P2	3	10
1.M-101	BUILDING 2 PARTIAL MECHANICAL FLOOR PLANS - P3	4	10
2.M-101	BUILDING 5 PARTIAL MECHANICAL FLOOR PLANS - P13	5	10
5.M-101	BUILDING 38 PARTIAL MECHANICAL FLOOR PLANS - P6 & P7	6	10
38.M-101	BUILDING 135 PARTIAL MECHANICAL PLANS - P14 & P15	7	10
135.M-101	BUILDING 137 PARTIAL MECHANICAL PLANS	8	10
137.M-101	MECHANICAL DETAILS	9	10
M-501	MECHANICAL SCHEDULES	10	10
M-601	ELECTRICAL	1	16
E-001	ELECTRICAL GENERAL NOTES, SYMBOL LEGENDS, AND ABBREVIATIONS	2	16
E-002	TECHNOLOGY GENERAL NOTES, SYMBOL LEGEND, AND ABBREVIATIONS	3	16
1.ED101	BUILDING 1 PARTIAL MECHANICAL PENTHOUSE ELECTRICAL DEMOLITION PLANS - P1 & P2	4	16
1.EP101	BUILDING 1 PARTIAL MECHANICAL PENTHOUSE ELECTRICAL PLANS - P1 & P2	5	16
2.ED101	BUILDING 2 PARTIAL ATTIC ELECTRICAL DEMOLITION PLAN - P3	6	16
2.EP101	BUILDING 2 PARTIAL ATTIC AND ELEVATOR PIT ELECTRICAL PLANS - P3	7	16
5.ED101	BUILDING 5 PARTIAL BASEMENT FLOOR ELECTRICAL DEMOLITION PLAN - P13	8	16
5.EP101	BUILDING 5 PARTIAL BASEMENT FLOOR ELECTRICAL PLANS - P13	9	16
38.ED101	BUILDING 38 PARTIAL BASEMENT ELECTRICAL DEMOLITION PLANS - P6, P7	10	16
38.EP101	BUILDING 38 PARTIAL BASEMENT ELECTRICAL PLANS - P6, P7	11	16
135.ED101	BUILDING 135 PARTIAL BASEMENT ELECTRICAL DEMOLITION PLAN - P14, P15	12	16
135.EP101	BUILDING 135 PARTIAL BASEMENT AND ELEVATOR PIT ELECTRICAL PLANS - P14, P15	13	16
137.ED101	BUILDING 137 PARTIAL GROUND FLOOR ELECTRICAL DEMOLITION PLAN - P17, P18 & P19	14	16
137.EP101	BUILDING 137 PARTIAL GROUND, ELEVATOR PIT AND ROOF ELECTRICAL PLANS - P17, P18 & P19	15	16
E-201	ELEVATOR ELECTRICAL SECTIONS	16	16
E-501	ELEVATOR ELECTRICAL DETAILS AND EQUIPMENT CONDUCTOR SCHEDULE	1	1
FIRE ALARM	FIRE ALARM GENERAL NOTES, SYMBOL LEGEND, AND RISER		
FA001			

SIGNATURES REQUIRED

DIRECTOR: _____ DATE: _____

ENERGY ENGINEER: _____ DATE: _____



INFECTION CONTROL: _____ DATE: _____

SAFETY MANAGER: _____ DATE: _____

ALTERNATE NOTES

1. DELETE ALL WORK AT BUILDING NUMBER 1


FULLY SPRINKLERED
100% BID DOCUMENTS

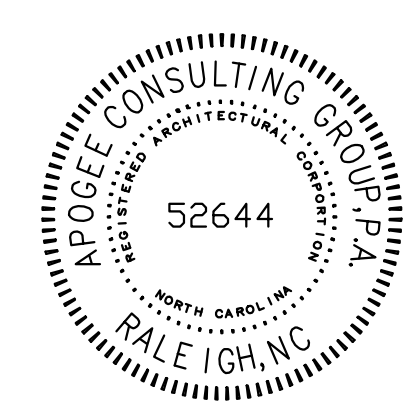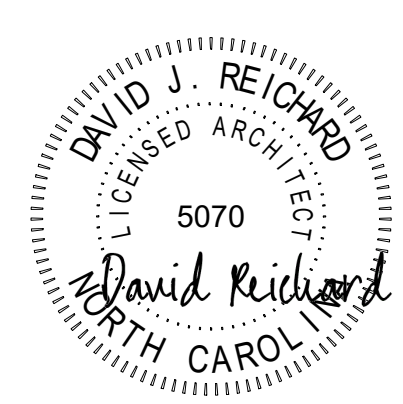		CONSULTANTS:						PROJECT MANAGER ACG Project Number 21-344 Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511 www.acg-pa.com 919-858-7420		Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs		Drawing Title COVER SHEET & DRAWING LIST Location TUSCALOOSA VAMC		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137 Approved Date FEBRUARY 6, 2025 Checked DJR Drawn LBB		VA PROJECT NUMBER 679-22-100 Building Number BLDGs 1, 2, 5, 38, 135 & 137 Drawing Number G-001 Dwg 1 of 8	
--	--	--------------	--	---	--	---	--	--	--	--	--	--	--	---	--	---	--

	Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137			VA PROJECT NUMBER 679-22-100
				Building Number 1, 2, 5, 38, 135 & 137
	Approved			Drawing Number G-002
	Date FEBRUARY 6, 2025	Checked DJR	Drawn LBB	Dwg 2 of 8



1 BUILDING 1 OVERALL BASEMENT FLOOR PLAN
Scale: 1/8" = 1'-0"



SHEET NOTES:

- 1 PROVIDE ICRA ENCLOSURE TYPE C AT ELEVATORS.
SEE G-002 FOR ICRA NOTES AND DETAILS.
- 2 COORDINATE WITH COR FOR CONSTRUCTION
ACCESS ROUTE



ICRA NOTES GROUND & UPPER FLOOR
LEVELS - BUILDING 1
(REFER TO ICRA MATRIX AND NOTES
ON G-002)

IC ACTIVITY TYPE:	<u>B</u>
IC RISK GROUP:	<u>2</u>
IC CONSTRUCTION CLASS:	<u>II</u>

GENERAL NOTE 1


CONTRACTOR TO COMPLETE WORK ON ONE ELEVATOR PER BUILDING AT A TIME

LIFE SAFETY LEGEND

- | | |
|---|---|
|  | EGRESS PATH |
|  | EGRESS PATH TAG |
|  | EGRESS PATH TAG - COMMON PATH |
| <u>EGRESS IDENTIFICATION</u> | |
| EXIT IDENTIFICATION |  |
| EGRESS CLEAR WIDTH | |
| | EGRESS CAPACITY |
|  | AREA OF REFUGE |
|  | HAZARDOUS LOCATION |
| EXISTING | |
| XFEB | FIRE EXTINGUISHER BRACKET |
| FEC | FIRE EXTINGUISHER CABINET |
| FBC | FIRE BLANKET CABINET |
|  | EMERGENCY RESPONSE REFERENCE |
|  | CONTROLLED ACCESS - ALWAYS UNLOCKED IN DIRECTION OF EGRESS |
|  | KNOX BOX |
|  | DELAYED EGRESS W/ ALARM |
|  | NOT IN PROJECT SCOPE |

KEY PLAN

SCALE: NO SCALE

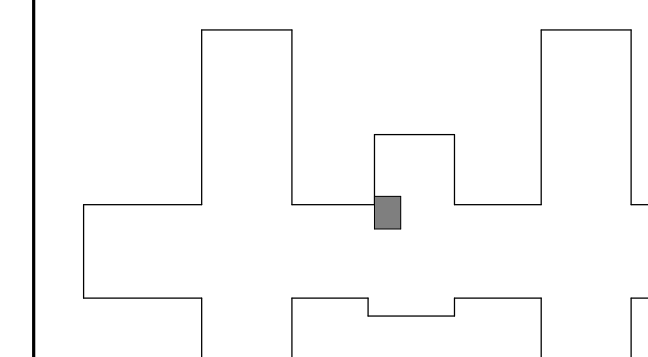


WALL RATING LEGEND


-  1 HR - FIRE SEPARATION
 2 HR - FIRE SEPARATION
 SMOKE RESISTIVE HAZARDOUS ARE

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

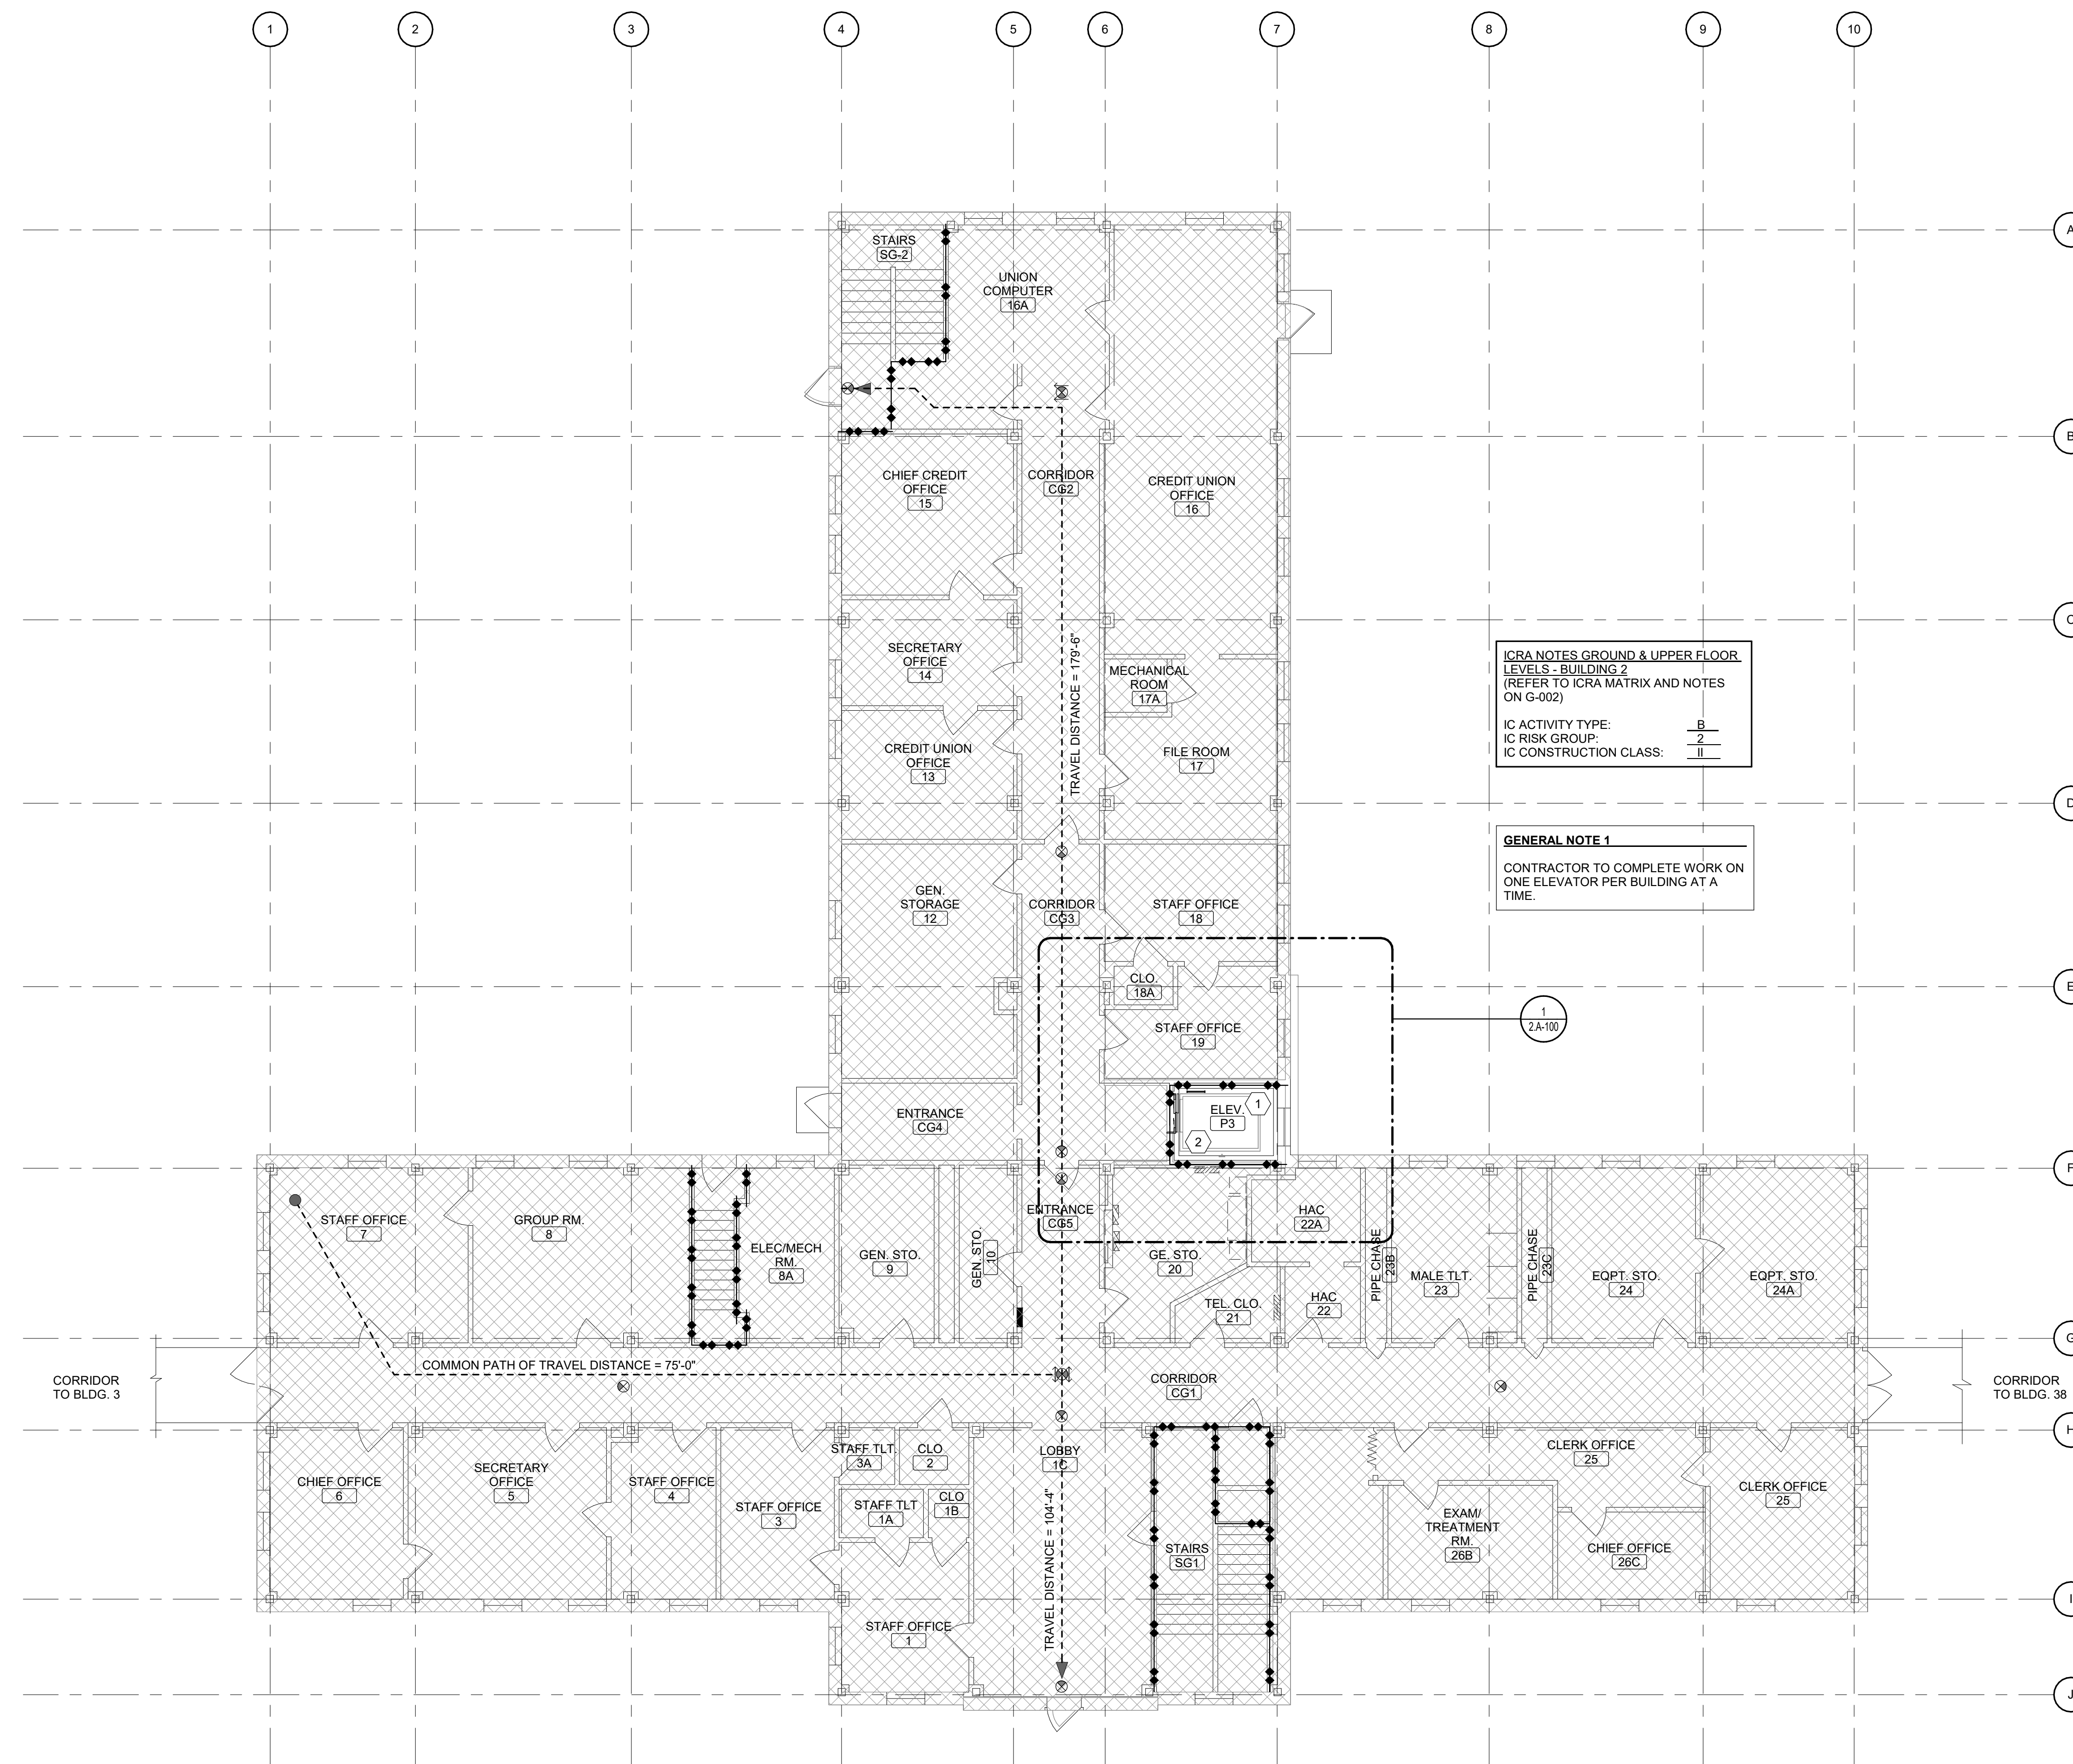


1 BUILDING 2 OVERALL GROUND FLOOR PLAN
Scale: 1/8" = 1'-0"

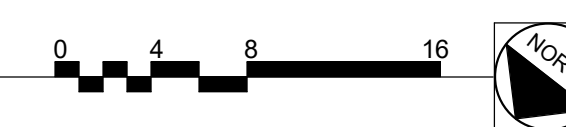

SHEET NOTES:


- | | |
|---|---|
| 1 | PROVIDE ICRA ENCLOSURE TYPE C AT ELEVATORS. SEE G-002 FOR ICRA NOTES AND DETAILS. |
| 2 | COORDINATE WITH COR FOR CONSTRUCTION ACCESS ROUTE. |

LIFE SAFETY LEGEND

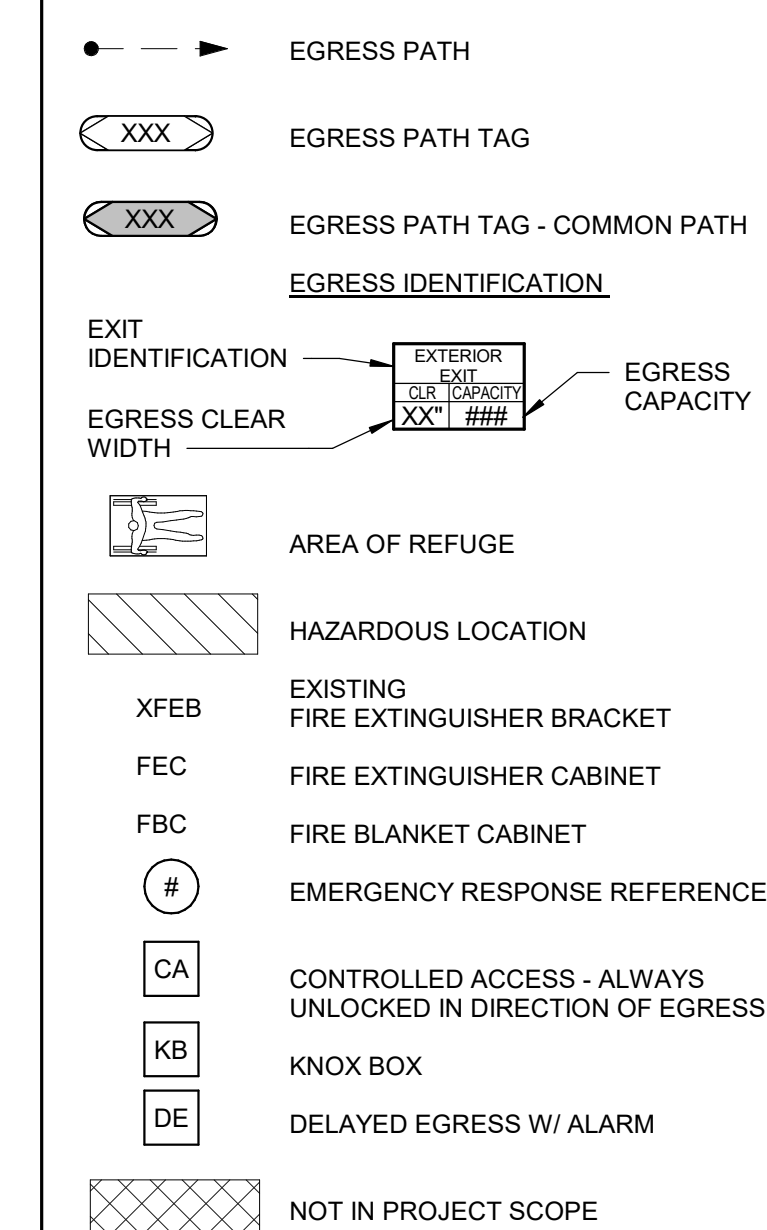


KEY PLAN

SCALE: NO SCALE

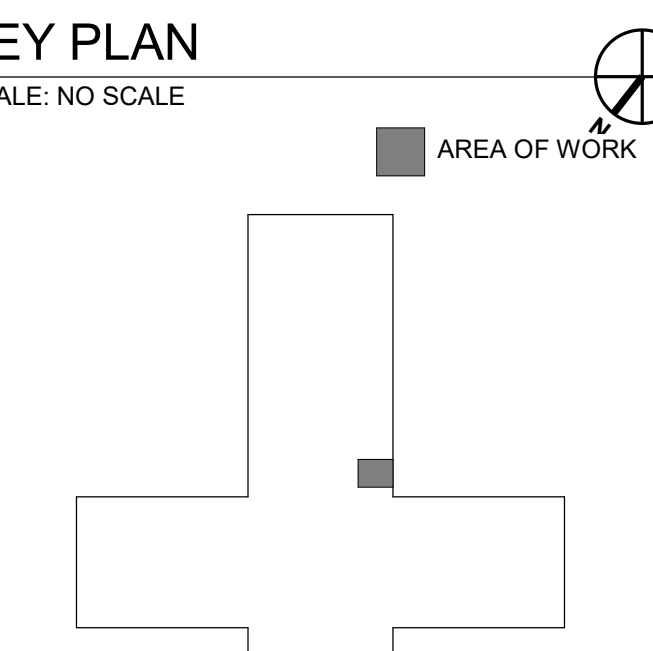

WALL RATING LEGEND

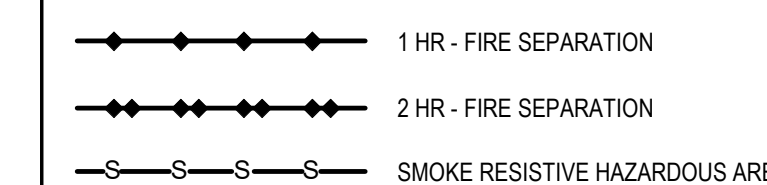

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

SHEET NOTES:


- 1 PROVIDE ICRA ENCLOSURE TYPE C AT ELEVATORS. SEE G-002 FOR ICRA NOTES AND DETAILS.
- 2 COORDINATE WITH COR FOR CONSTRUCTION ACCESS ROUTE.

LIFE SAFETY LEGEND

- EGRESS PATH
- EGRESS PATH TAG
- EGRESS PATH TAG - COMMON PATH
- EGRESS IDENTIFICATION
- EXIT IDENTIFICATION
- EGRESS CLEAR WIDTH
- AREA OF REFUGE
- HAZARDOUS LOCATION
- XFEB EXISTING FIRE EXTINGUISHER BRACKET
- FEC FIRE EXTINGUISHER CABINET
- FBC FIRE BLANKET CABINET
- # EMERGENCY RESPONSE REFERENCE
- CA CONTROLLED ACCESS - ALWAYS UNLOCKED IN DIRECTION OF EGRESS
- KB KNOX BOX
- DE DELAYED EGRESS W/ ALARM
- NOT IN PROJECT SCOPE

KEY PLAN

SCALE: NO SCALE

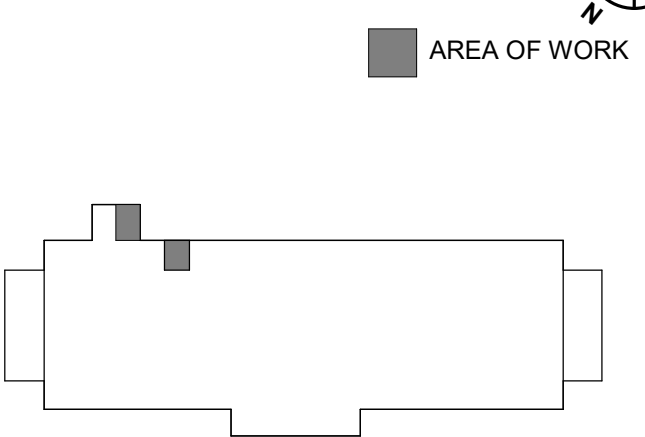


WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED


100% BID DOCUMENTS

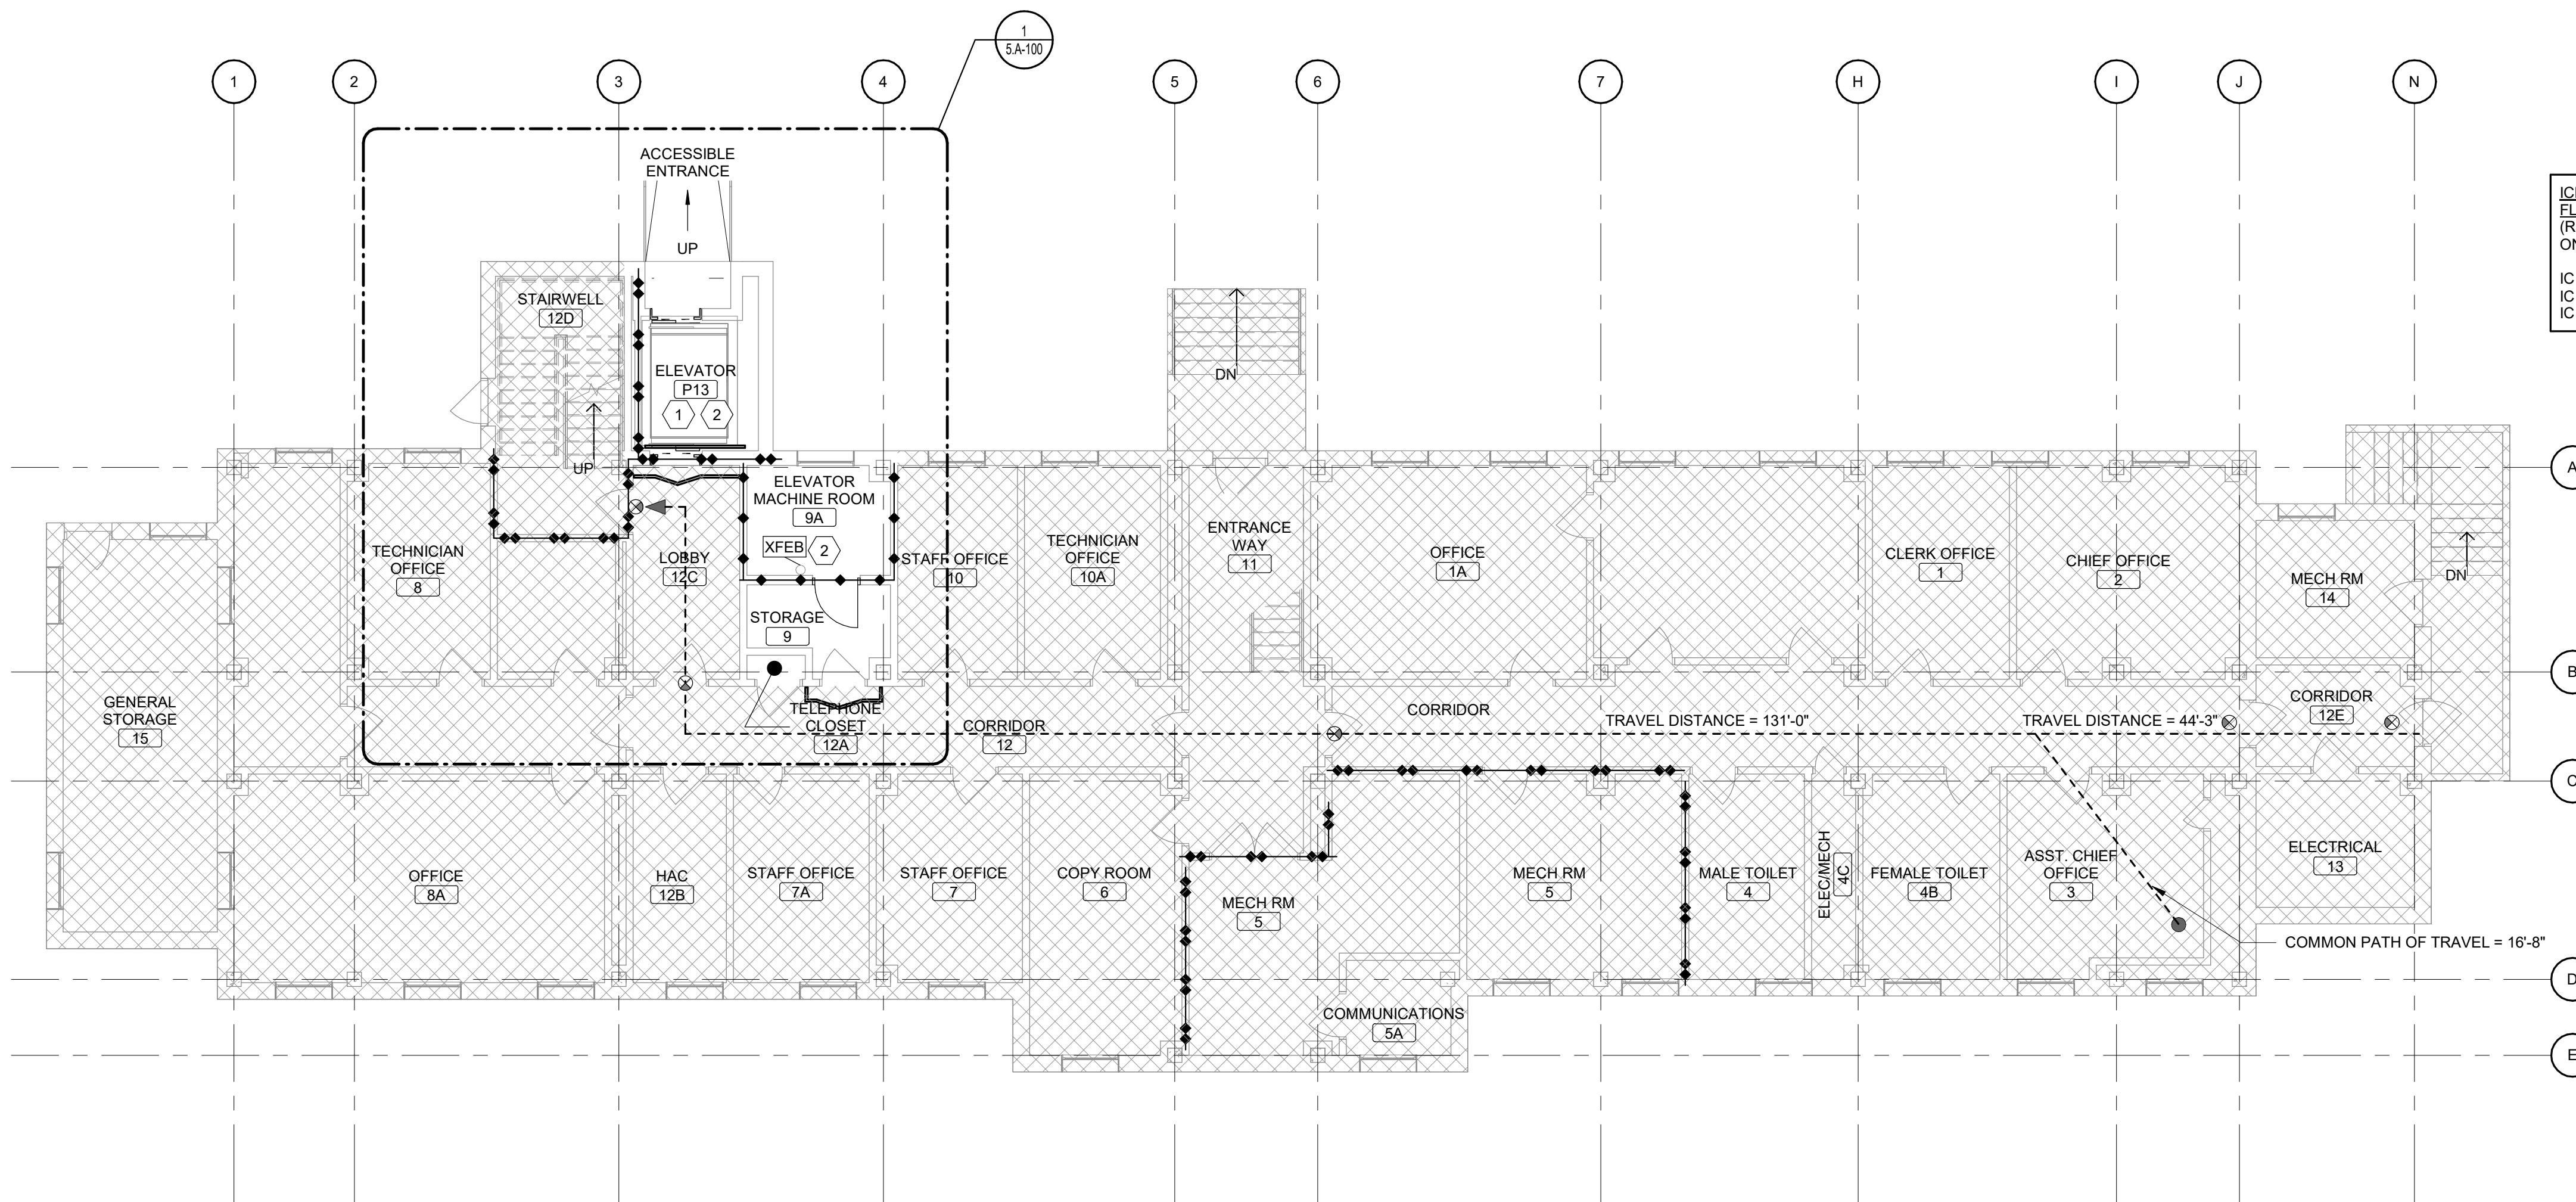



ICRA NOTES BASEMENT & UPPER FLOOR LEVELS - BUILDING 5 (REFER TO ICRA MATRIX AND NOTES ON G-002)

IC ACTIVITY TYPE: B
IC RISK GROUP: 2
IC CONSTRUCTION CLASS: II

1 BUILDING 5 OVERALL BASEMENT FLOOR PLAN
Scale: 1/8" = 1'-0"

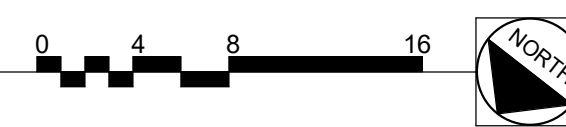

CONSULTANTS:		
#	Revisions:	Date

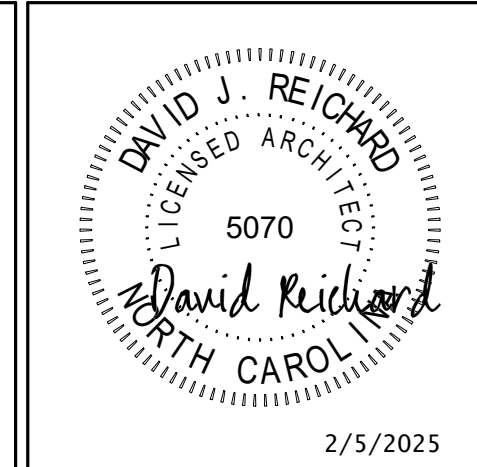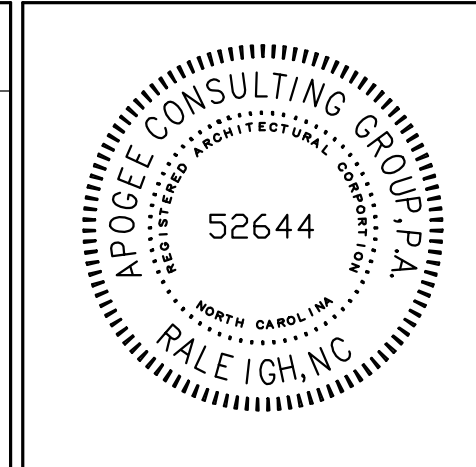

PROJECT MANAGER

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511

www.acg-pa.com 919-858-7420

Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans Affairs

Drawing Title
BUILDING 5 OVERALL BASEMENT FLOOR PLAN

Location
TUSCALOOSA VAMC

Project Title
ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137

Approved

Date
FEBRUARY 6, 2025

Checked
DJR


Drawn
LBB

VA PROJECT NUMBER
679-22-100

Building Number
5

Drawing Number
5.GL100

Dwg 5 of 8

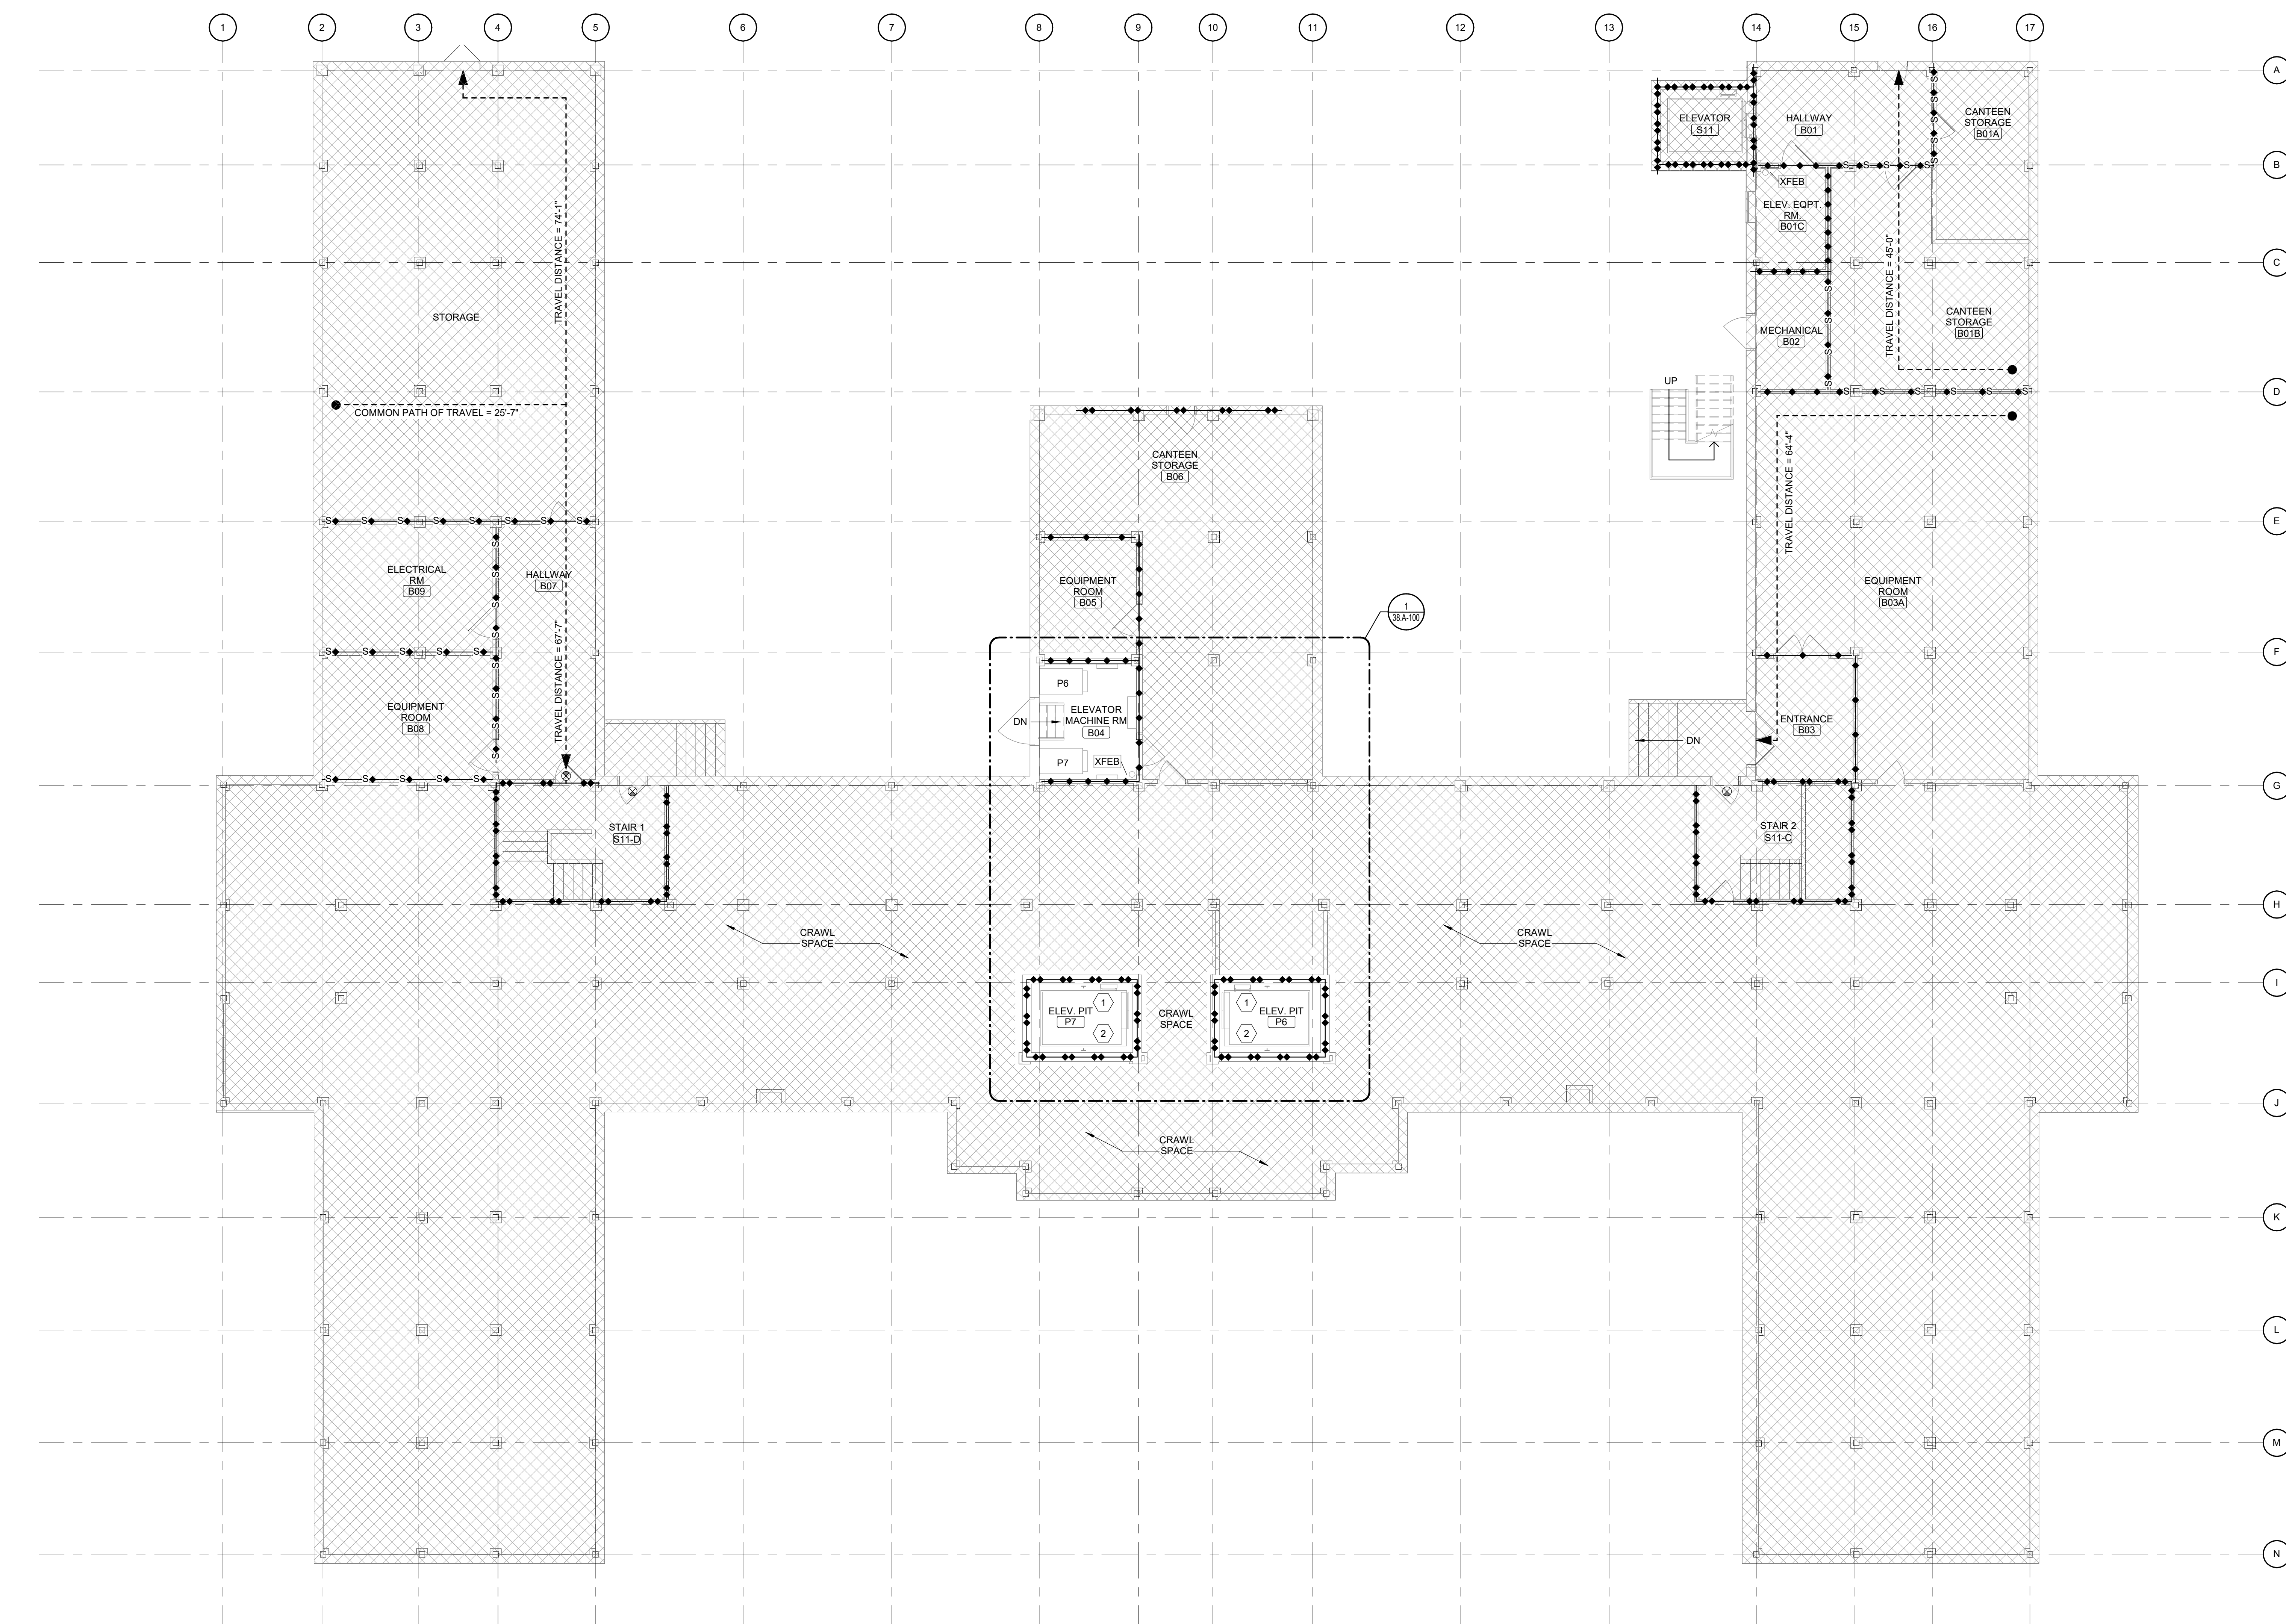





1 BUILDING 38 OVERALL BASEMENT FLOOR PLAN
Scale: 1/8" = 1'-0"

SHEET NOTES:

- 1 PROVIDE ICRA ENCLOSURE TYPE C AT ELEVATORS. SEE G-002 FOR ICRA NOTES AND DETAILS.
- 2 COORDINATE WITH COR FOR CONSTRUCTION ACCESS ROUTE


ICRA NOTES BASEMENT & UPPER FLOOR LEVELS - BUILDING 38 (REFER TO ICRA MATRIX AND NOTE ON G-002)	
IC ACTIVITY TYPE:	<u>B</u>
IC RISK GROUP:	<u>2</u>
IC CONSTRUCTION CLASS:	<u>II</u>

LIFE SAFETY LEGEND

- | | | |
|---|---|-----------------|
|  | EGRESS PATH | |
|  | EGRESS PATH TAG | |
|  | EGRESS PATH TAG - COMMON PATH | |
| <u>EGRESS IDENTIFICATION</u> | <u>EGRESS IDENTIFICATION</u> | |
| EXIT IDENTIFICATION |  | EGRESS CAPACITY |
| EGRESS CLEAR WIDTH | | |
|  | AREA OF REFUGE | |
|  | HAZARDOUS LOCATION | |
| XFOB | EXISTING | |
| FEC | FIRE EXTINGUISHER BRACKET | |
| FBC | FIRE EXTINGUISHER CABINET | |
| | FIRE BLANKET CABINET | |
|  | EMERGENCY RESPONSE REFERENCE | |
|  | CONTROLLED ACCESS - ALWAYS UNLOCKED IN DIRECTION OF EGRESS | |
|  | KNOX BOX | |
|  | DELAYED EGRESS W/ ALARM | |
|  | NOT IN PROJECT SCOPE | |

KEY PLAN

SCALE: NO SCALE

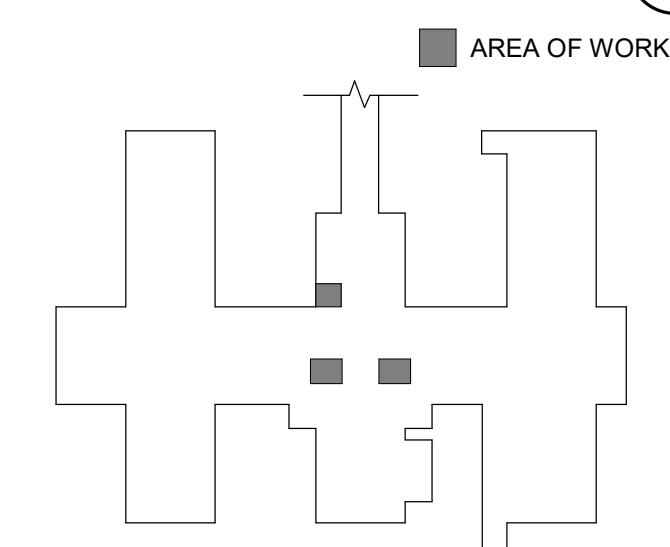

WALL RATING LEGEND

- 
 1 HR - FIRE SEPARATION
 2 HR - FIRE SEPARATION
 SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]



ICRA NOTES BASEMENT & UPPER
FLOOR LEVELS - BUILDING 135
(REFER TO ICRA MATRIX AND NOTES
ON G-002)

IC ACTIVITY TYPE: B
IC RISK GROUP: 2
IC CONSTRUCTION CLASS: II

SHEET NOTES:


- 1 PROVIDE ICRA ENCLOSURE TYPE C AT ELEVATORS. SEE G-002 FOR ICRA NOTES AND DETAILS.
- 2 COORDINATE WITH COR FOR CONSTRUCTION ACCESS ROUTE.
- 3 PROVIDE ICRA ENCLOSURE TYPE A1 AT ELEVATOR MACHINE ROOMS. SEE G-002 FOR ICRA NOTES AND DETAILS.

LIFE SAFETY LEGEND

- EGRESS PATH
- EGRESS PATH TAG
- EGRESS PATH TAG - COMMON PATH
- EGRESS IDENTIFICATION
- EXIT IDENTIFICATION
- EGRESS CLEAR WIDTH
- AREA OF REFUGE
- HAZARDOUS LOCATION
- XFEB EXISTING FIRE EXTINGUISHER BRACKET
- FEC FIRE EXTINGUISHER CABINET
- FBC FIRE BLANKET CABINET
- # EMERGENCY RESPONSE REFERENCE
- CA CONTROLLED ACCESS - ALWAYS UNLOCKED IN DIRECTION OF EGRESS
- KB KNOX BOX
- DE DELAYED EGRESS W/ ALARM
- NOT IN PROJECT SCOPE

KEY PLAN

SCALE: NO SCALE

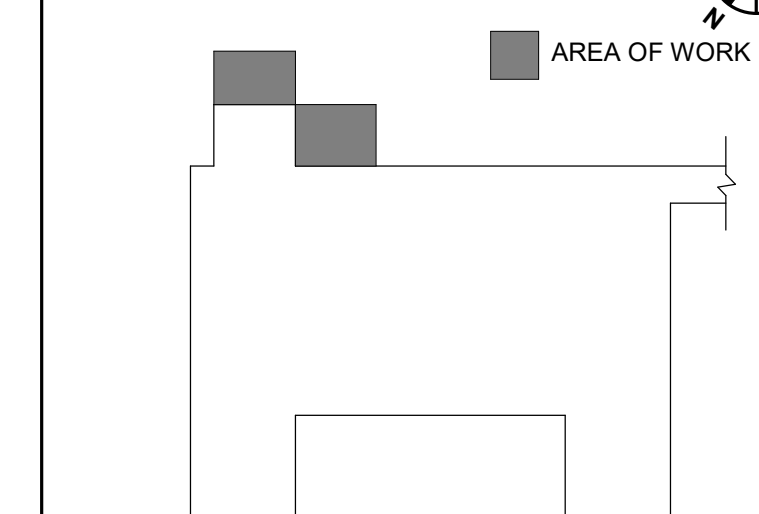

WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% BID DOCUMENTS

1 BUILDING 135 OVERALL BASEMENT FLOOR PLAN
Scale: 1/8" = 1'-0"

CONSULTANTS:

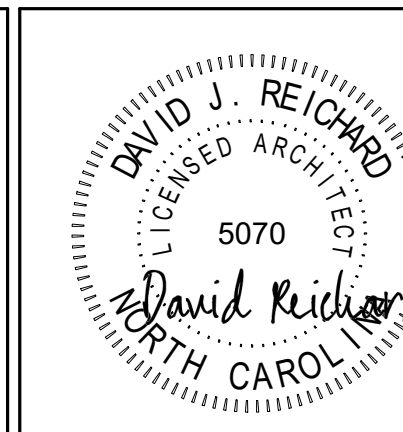

PROJECT MANAGER
Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

ACG Project Number
21-344

Office of
Construction
and Facilities
Management



Drawing Title
**BUILDING 135 OVERALL BASEMENT
FLOOR PLAN**

Location
TUSCALOOSA VAMC

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**

Approved

Date
FEBRUARY 6, 2025

Checked
DJR

Drawn
LBB

VA PROJECT NUMBER
679-22-100


Building Number
135

Drawing Number
135.GL100


Dwg 7 of 8

Revisions: Date

GENERAL SYMBOL LEGEND

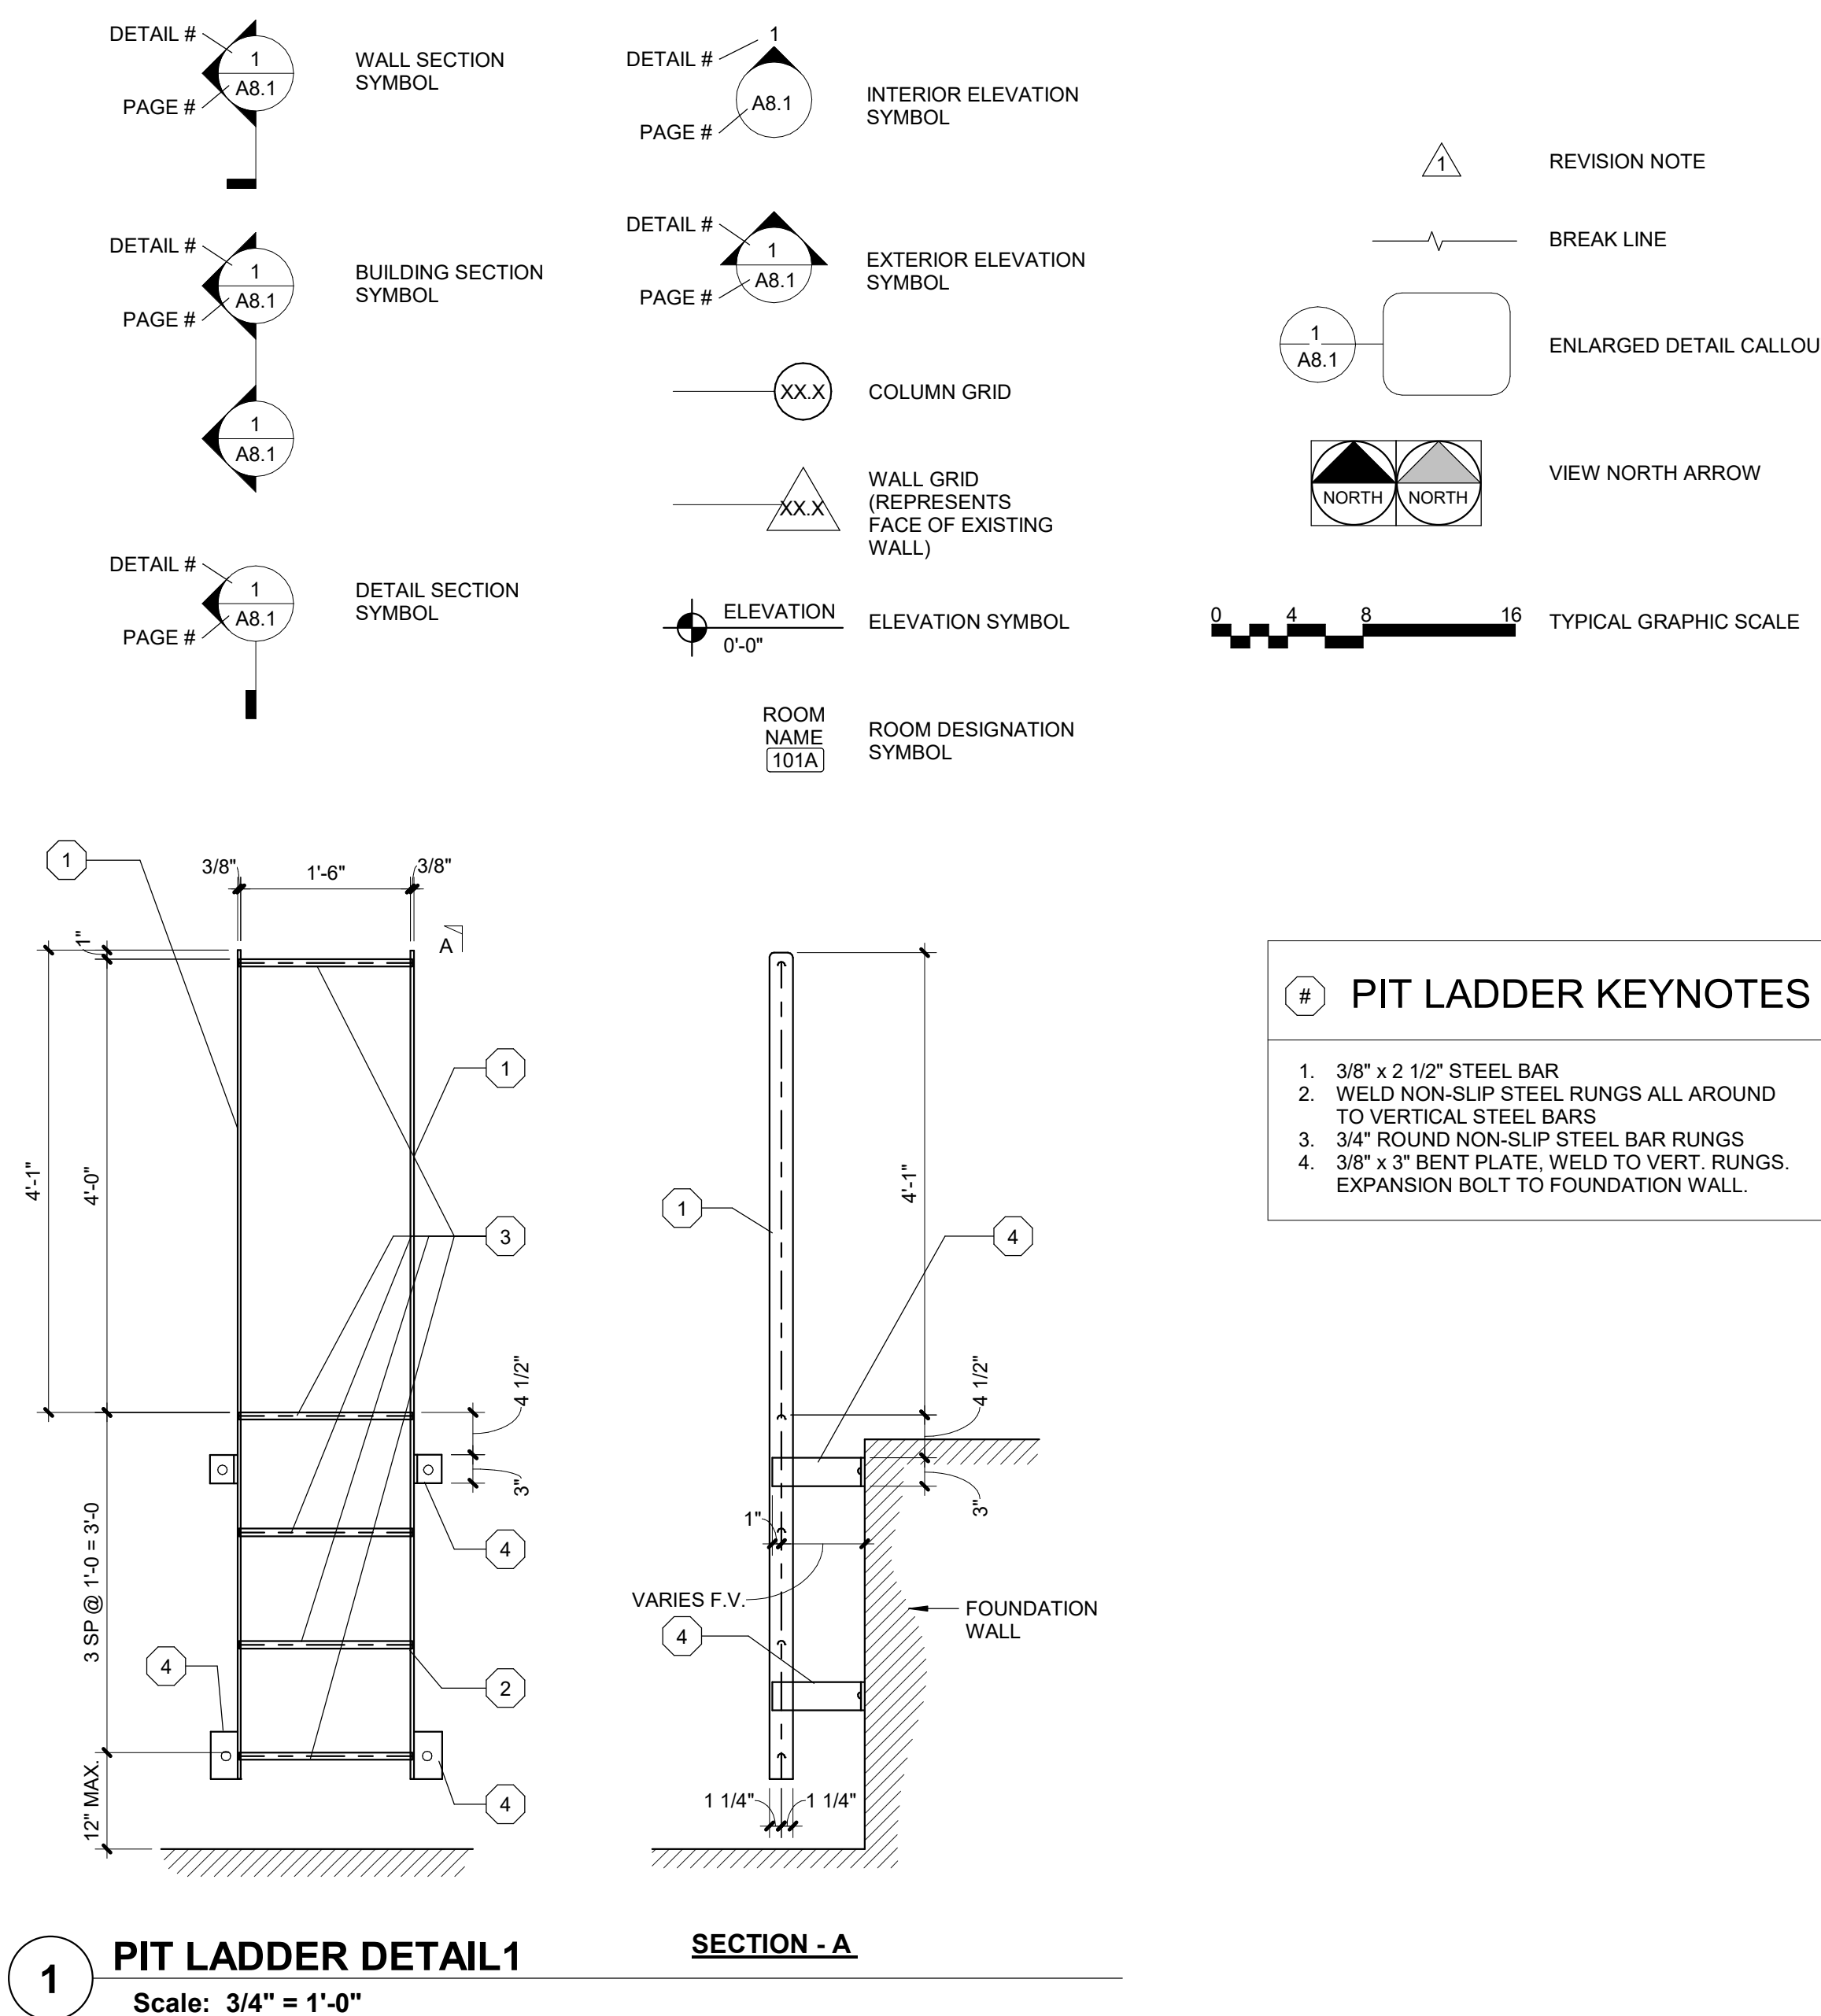

ARCHITECTURAL SYMBOL LEGEND

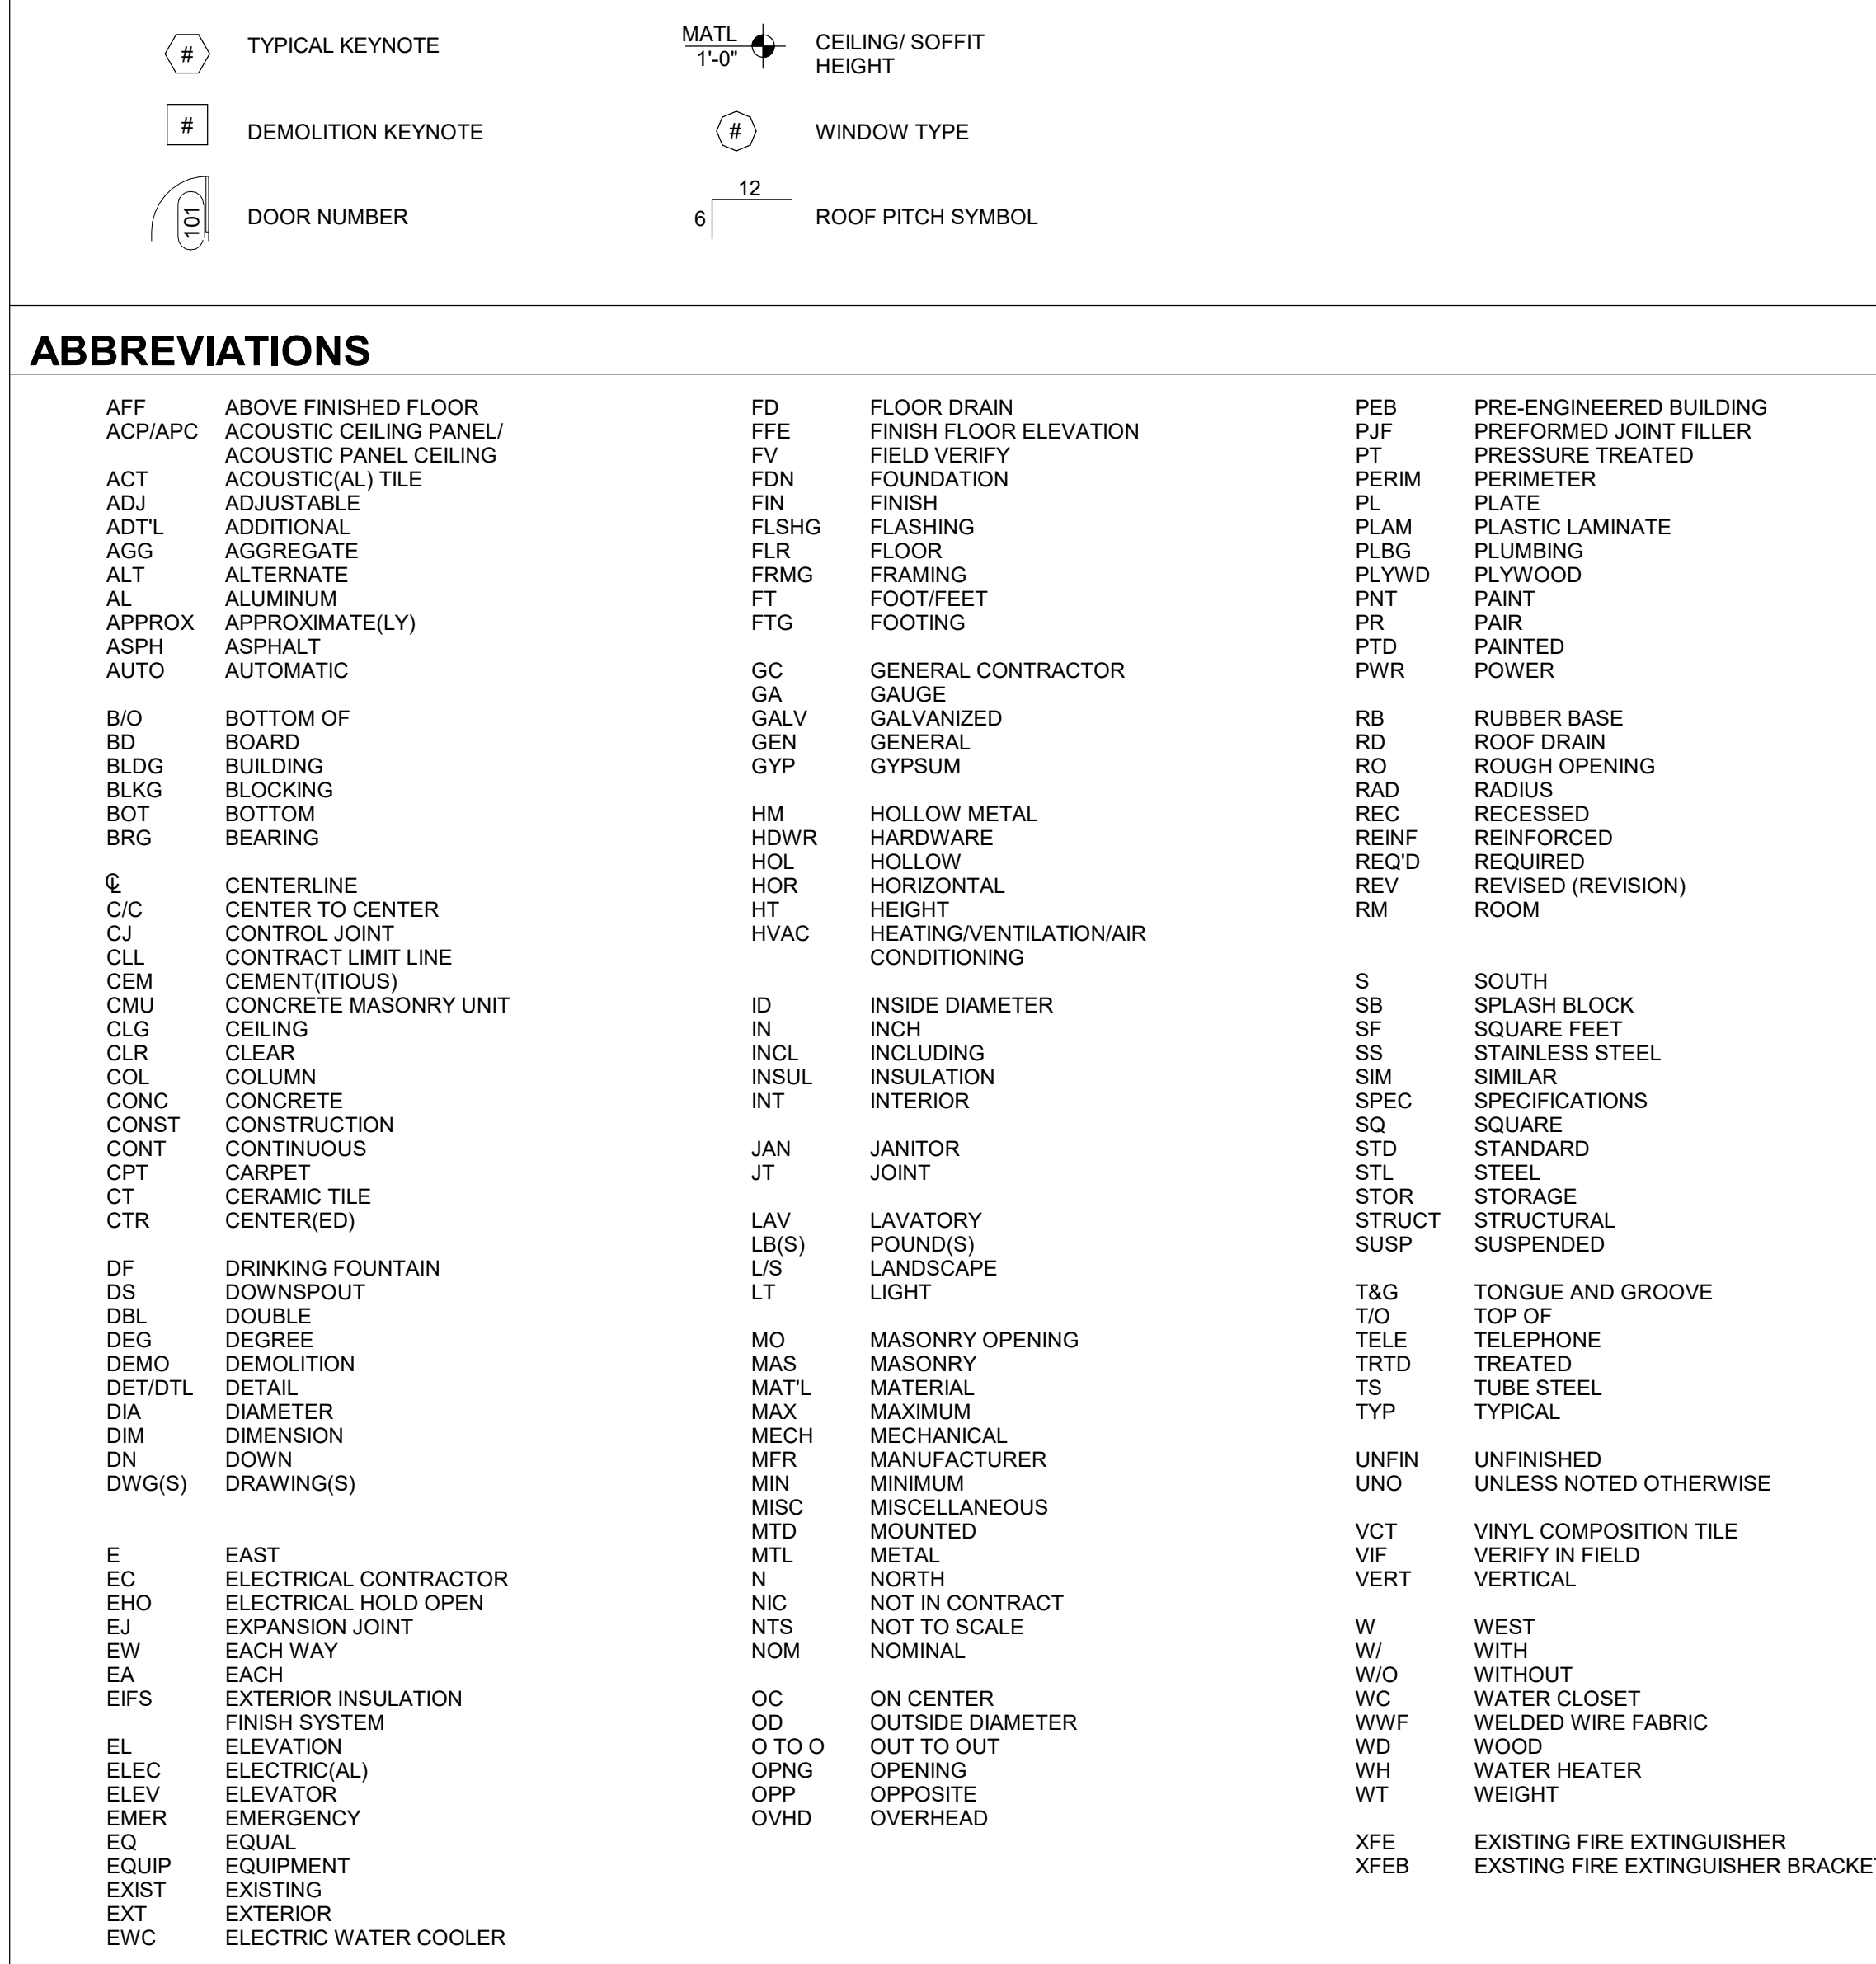

GENERAL NOTES

1. INDICATIONS OF PROJECT LIMITS OR LINES OF DEMARCATION ARE SHOWN FOR GENERAL, SCOPE DEFINITION AND REFLECT THE UNDERSTANDING OF THE DESIGNER AS TO THE LIMITATIONS OF THE WORK AREA IN A GIVEN AREA. THE AREA TO BE CONSTRUCTED IS TO BE DETERMINED BY AGREEMENT BETWEEN THE COR AND CONTRACTOR BEFORE THE START OF THE WORK.
2. DRAWINGS ARE PREPARED USING PRODUCT DIMENSIONS AND DETAILS FROM BASIS OF DESIGN PRODUCT. PRODUCTS MAY CHANGE IN DIMENSION AND DETAIL. BEFORE THEY ARE INCORPORATED INTO WORK, PRODUCTS FROM OTHER MANUFACTURERS ARE ALSO ACCEPTABLE. DIMENSIONS AND DETAILS FOR ALTERNATE PRODUCTS MUST BE SUBMITTED FOR BASIS OF DESIGN. CONTRACTOR SHALL VERIFY INSTALLATION REQUIREMENTS FOR ALL PRODUCTS TO BE INCORPORATED INTO WORK (INCLUDING THICKNESS FOR RECESSED OR SEMI-RECESSED PRODUCTS) AND IS RESPONSIBLE FOR ACCOMMODATING AND COORDINATING CHANGES TO OTHER MATERIALS OR PRODUCTS THAT ARE NECESSARY BECAUSE OF THESE DIFFERENCES.
3. THE DRAWINGS AND SPECIFICATIONS ARE SEPARATED INTO DISCIPLINES FOR CONVENIENCE. THE SEPARATIONS ARE MADE ONLY FOR THE PURPOSES OF CONVENIENCE AND REFERENCE AND IN NO WAY DO THEY DEFINE OR LIMIT THE SCOPE OR INTENT OF ANY PART OF THE DRAWINGS AND SPECIFICATIONS AS A WHOLE. THE FACT THAT THE DRAWINGS ARE SEPARATED IN NO WAY SUGGESTS THAT THE WORK IS NOT TO BE CONSIDERED A COMPLETE, INTEGRATED AND UNIFIED WHOLE.
4. THE DRAWINGS AND SPECIFICATIONS, INCLUDING DRAWINGS PREPARED BY SPECIFIC ENGINEERING DISCIPLINES ARE COMPLEMENTARY. ITEMS SHOWN IN ANY ONE LOCATION IN THE DRAWINGS SHALL BE CONSIDERED TO BE REQUIREMENTS OF THE CONTRACT FOR CONSTRUCTION. IN THE EVENT OF AN INCONSISTENCY BETWEEN THE DRAWINGS AND SPECIFICATIONS, OR WITHIN EITHER DOCUMENT, THE CONTRACTOR SHALL SEEK CLARIFICATION OR INTERPRETATION FROM THE COR PRIOR TO BIDDING, WHERE INCONSISTENCIES ARE NOT CLARIFIED PRIOR TO BIDDING, AND WHERE THE ACTUAL SOLUTION OR INTENT CANNOT BE REASONABLY INFERRED, THE CONTRACTOR SHALL PROVIDE THE BETTER QUALITY OR GREATER QUANTITY OF WORK.
5. THE CONTRACTOR SHALL NOTIFY THE COR IMMEDIATELY SHOULD DISCREPANCIES BE FOUND IN THE DRAWINGS AND SPECIFICATIONS.
6. THE CONTRACTOR IS RESPONSIBLE FOR CHECKING ALL FIELD CONDITIONS AND DIMENSIONS AS THEY RELATE TO THIS PROJECT. FOR EACH PHASE, SHOULD DISCREPANCIES EXIST BETWEEN THE WORK INDICATED AND ACTUAL FIELD CONDITIONS, NOTIFY THE COR PRIOR TO PROCEEDING WITH THE WORK.
7. DO NOT SCALE THE DRAWINGS. DRAWING SCALES AS INDICATED ARE FOR REFERENCE ONLY AND ARE NOT INTENDED TO ACCURATELY DEPICT ACTUAL OR DESIGNATED CONDITIONS. VERTICAL DIMENSIONS SHALL GOVERN.
8. PROVIDE SEALANT AT ALL INTERSECTIONS BETWEEN DIFFERENT MATERIALS.
9. COORDINATE WORK OF ALL TRADES PRIOR TO STARTING CONSTRUCTION.
10. REFER TO ALL OTHER TRADE DRAWINGS AND SPECIFICATIONS FOR ADDITIONAL INFORMATION ON THIS PROJECT.
11. PROVIDE BACKING AT PARTITIONS AS REQUIRED FOR MOUNTING OF WALL-MOUNTED ITEMS. PROVIDE SUPPLEMENTAL FRAMING AT WALL OPENINGS INCLUDING KING STUDS, JACK STUDS, AND CHIRPLE STUDS, AS REQUIRED FOR COMPLETION OF THE WORK.
12. DIMENSIONS SHOWN ARE TO FACE OF STUD FRAMING, FACE OF CONCRETE/MASONRY WALLS, OR FINISHED FACE OF EXISTING WALL SURFACE.
13. ALL WOOD IN CONTACT WITH CONCRETE SHALL BE PRESERVED/TREATED.
14. IF AT ANY TIME DURING CONSTRUCTION, THE PRESENCE OF ANY CONTAMINATED MATERIALS APPEARS TO BE DETECTED, THE CONTRACTOR SHALL IMMEDIATELY ALERT THE COR OF THE FINDINGS VERBALLY AND IN WRITING WITHIN 12 HOURS OF ANY POTENTIAL DISCOVERY.

DEMOLITION NOTES

1. KEY NOTES AND DRAWINGS ARE INTENDED TO GRAPHICALLY REPRESENT GENERAL WORK AND DO NOT PORTRAY FULL SCOPE OF THE PROJECT. SEE SPECIFICATIONS FOR DETAILED REQUIREMENTS.
2. REMOVE EXISTING CONSTRUCTION AS DESIGNATED HEREIN AND CLEAR AREA OF DEBRIS PRIOR TO PROCEEDING WITH NEW CONSTRUCTION.
3. EXISTING EQUIPMENT REMOVAL SHALL BE PROPERLY DISPOSED OF, OFF PROJECT GROUNDS. COORDINATE WITH COR.
4. AT AREAS INDICATED TO BE PATCHED AND REPAIRED, FOR ADDITION AND RENOVATION PROJECTS: THE CONSTRUCTION AND ASSEMBLY OF THE PATCH OR REPAIR SHALL MATCH THE ASSEMBLY AND INTEGRITY OF THE ADJACENT EXISTING CONSTRUCTION, FOR FIRE RATING, MATERIALS, FINISH, THICKNESS, AND QUALITY.
5. COORDINATE WORKING HOURS ALLOWED FOR DEMOLITION AND WASTE REMOVAL WITH COR.
6. NOTIFY COR OF ANY DEMOLITION REQUIRED AND NOT INDICATED FOR INSTALLATION OF ELECTRICAL OR DATA ITEMS. AFTER SUCH DEMOLITION AND INSTALLATION, PATCH OR REPLACE MATERIALS AND FINISHES TO MATCH EXISTING.
7. CONTRACTOR SHALL PROTECT AREA ADJACENT TO THE DEMOTION AND NEW CONSTRUCTION WORK TO PREVENT DAMAGE. REPAIR, RE-PAINT AND RE-FINISH TO MATCH EXISTING.) REPAIR OR REPLACE ITEMS DAMAGED DURING CONSTRUCTION ACTIVITIES AT NO ADDITIONAL COST.
8. THE INFORMATION CONTAINED IN THESE DEMOLITION DOCUMENTS DEFINES GENERAL SCOPE ONLY AND DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY OF PROVIDING ALL DEMOLITION REQUIRED FOR THE COMPLETION OF THE PROJECT.
9. DO NOT ENCRATCH ON ADJACENT OCCUPIED AREAS NOT IDENTIFIED WITHIN THE SCOPE OF WORK.
10. REFER TO THE ELECTRICAL DRAWINGS FOR FURTHER INFORMATION REGARDING DEMOLITION OF ELECTRICAL SYSTEMS.
11. BEFORE THE START OF WORK, IDENTIFY ANY REQUIRED DEMOLITION BEYOND THE IDENTIFIED PROJECT SCOPE WHETHER ABOVE, BELOW, OR OUTSIDE THE PROJECT AREA. NOTIFY AND COORDINATE WITH THE COR. PROVIDE DEMOLITION OF THESE AREAS AND PATCH THE SAME AS A PART OF THE SCOPE OF THE PROJECT.
12. ALL DEMOLITION WORK SHALL BE PERFORMED WITH DUE CARE AND DILIGENCE IN ORDER TO PREVENT ARBITRARY DAMAGE OR INTERRUPTION OF SERVICE OR CONCEALED UTILITIES INTENDED TO REMAIN IN SERVICE. DISCOVERY OF SUCH CONCEALED CONDITIONS LOCATED DIFFERING FROM THOSE INDICATED OR THAT ARE NOT IDENTIFIED, SHALL BE REPORTED TO THE COR.
13. VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING WORK. NOTIFY COR AND ARCHITECT OF ANY CONFLICTS PRIOR TO PROCEEDING WITH DEMOLITION.
14. ALL ITEMS BEING SALVAGED OR REMOVED SHALL REMAIN THE PROPERTY OF THE OWNER UNTIL CONFIRMATION HAS BEEN MADE AS TO WHETHER THE OWNER WILL RETAIN SUCH ITEMS. ALL ITEMS NOT BEING RETAINED BY THE OWNER OR DESIGNATED ON THE DRAWINGS, ARE TO BE RELOCATED OR REMOVED FROM THE SITE BY CONTRACTOR IN APPROVED MANNER.
15. CONTRACTOR SHALL NOTIFY COR OF ANY AREA REQUIRING DEMOLITION OTHER THAN SHOWN IN THESE DRAWINGS DUE TO UNFORSEEN CONDITIONS TO ACCOMMODATE INSTALLATION OF ALL OTHER TRADES (INCLUDING ROOF PENETRATIONS). AFTER SUCH DEMOLITION AND INSTALLATION, PATCH OR REPLACE MATERIALS AND FINISHES TO MATCH EXISTING.
16. COORDINATE WITH COR FOR CONSTRUCTION ACCESS ROUTE AND LOCATIONS OF DUMPSTER AREA. COORDINATE WITH COR FOR SCHEDULE OF USE OF ACCESS ROUTE FOR WASTE REMOVAL AND CONTRACTOR USE OF HEIGHT ELEVATOR (AS REQUIRED).

★ 1 ALTERNATE NOTES

1. DELETE ALL WORK AT BUILDING NUMBER 1

GENERAL NOTE 1

- CONTRACTOR TO COMPLETE WORK ON ONE ELEVATOR PER BUILDING AT A TIME

ELEVATOR MATRIX


NOTES:

1. ALL SILLS SHALL BE REUSED
2. SS=STAINLESS STEEL.

Building	Elevator No.	Car Type	Weight (lbs.)	Capacity	Type	Shaft Size	Shaft Height	Pit Depth	Platform Size	Door Width	Door Position	Door Height	Total Travel	Stop 1 Height	Stop 2 Height	Stop 3 Height	Stop 4 Height	Machine Room Location	Penthouse	Frame Replacement	Frame Material	Door Replacement	Door Material/Finish	Door Location	Sump Pump	Comments
1	P1 and P2	Passenger	3,000	Traction	6'-3" x 8'-6"	4'-0"	4'-9" x 6'-8"	39"	Side	7'-0"								PH	Yes	No	SS	Yes	SS/ Brushed	Front		Penthouse Door is 30" wide x 84" tall
2	P3	Passenger	3,000	Geared Traction	6'-3" x 8'-6"	4'-0"	4'-9" x 6'-8"	39"	Side	7'-0"								Attic	Yes	No	SS	Yes	SS/ Brushed	Front	Yes	
5	P13	Passenger	3,000	Hydraulic	6'-3" x 8'-6"	4'-0"	4'-9" x 6'-8"	44"	Side	7'-0"								B	No	No	PTD	Yes	Metal/Painted	Front and Back	Yes	The Basement level entrance door is to the exterior.
38	P6 and P7	Passenger	5,800	Hydraulic	6'-11" x 8'-2"	4'-0"	4'-8" x 6'-8"	48"	Side	7'-0"								B	No	No	SS	Yes	SS/ Brushed	Front	Yes	
136	P14 and P15	Passenger	4,000	Hydraulic	6'-11" x 9'-4"	4'-0"	5'-4" x 7'-8"	48"	Side	7'-0"								B	No	No	SS	Yes	Metal/ Painted	Front and Back	Yes	
137	P17, P18 and P19	Passenger	4,000	Hydraulic	6'-11" x 9'-4"	4'-0"	5'-4" x 7'-8"	48"	Center	7'-0"								1	No	No	SS	Yes	SS/ Brushed	Front	Yes	Machine Rooms are accessible via a 36" wide door.

FULLY SPRINKLERED
100% BID DOCUMENTS


[illegible]

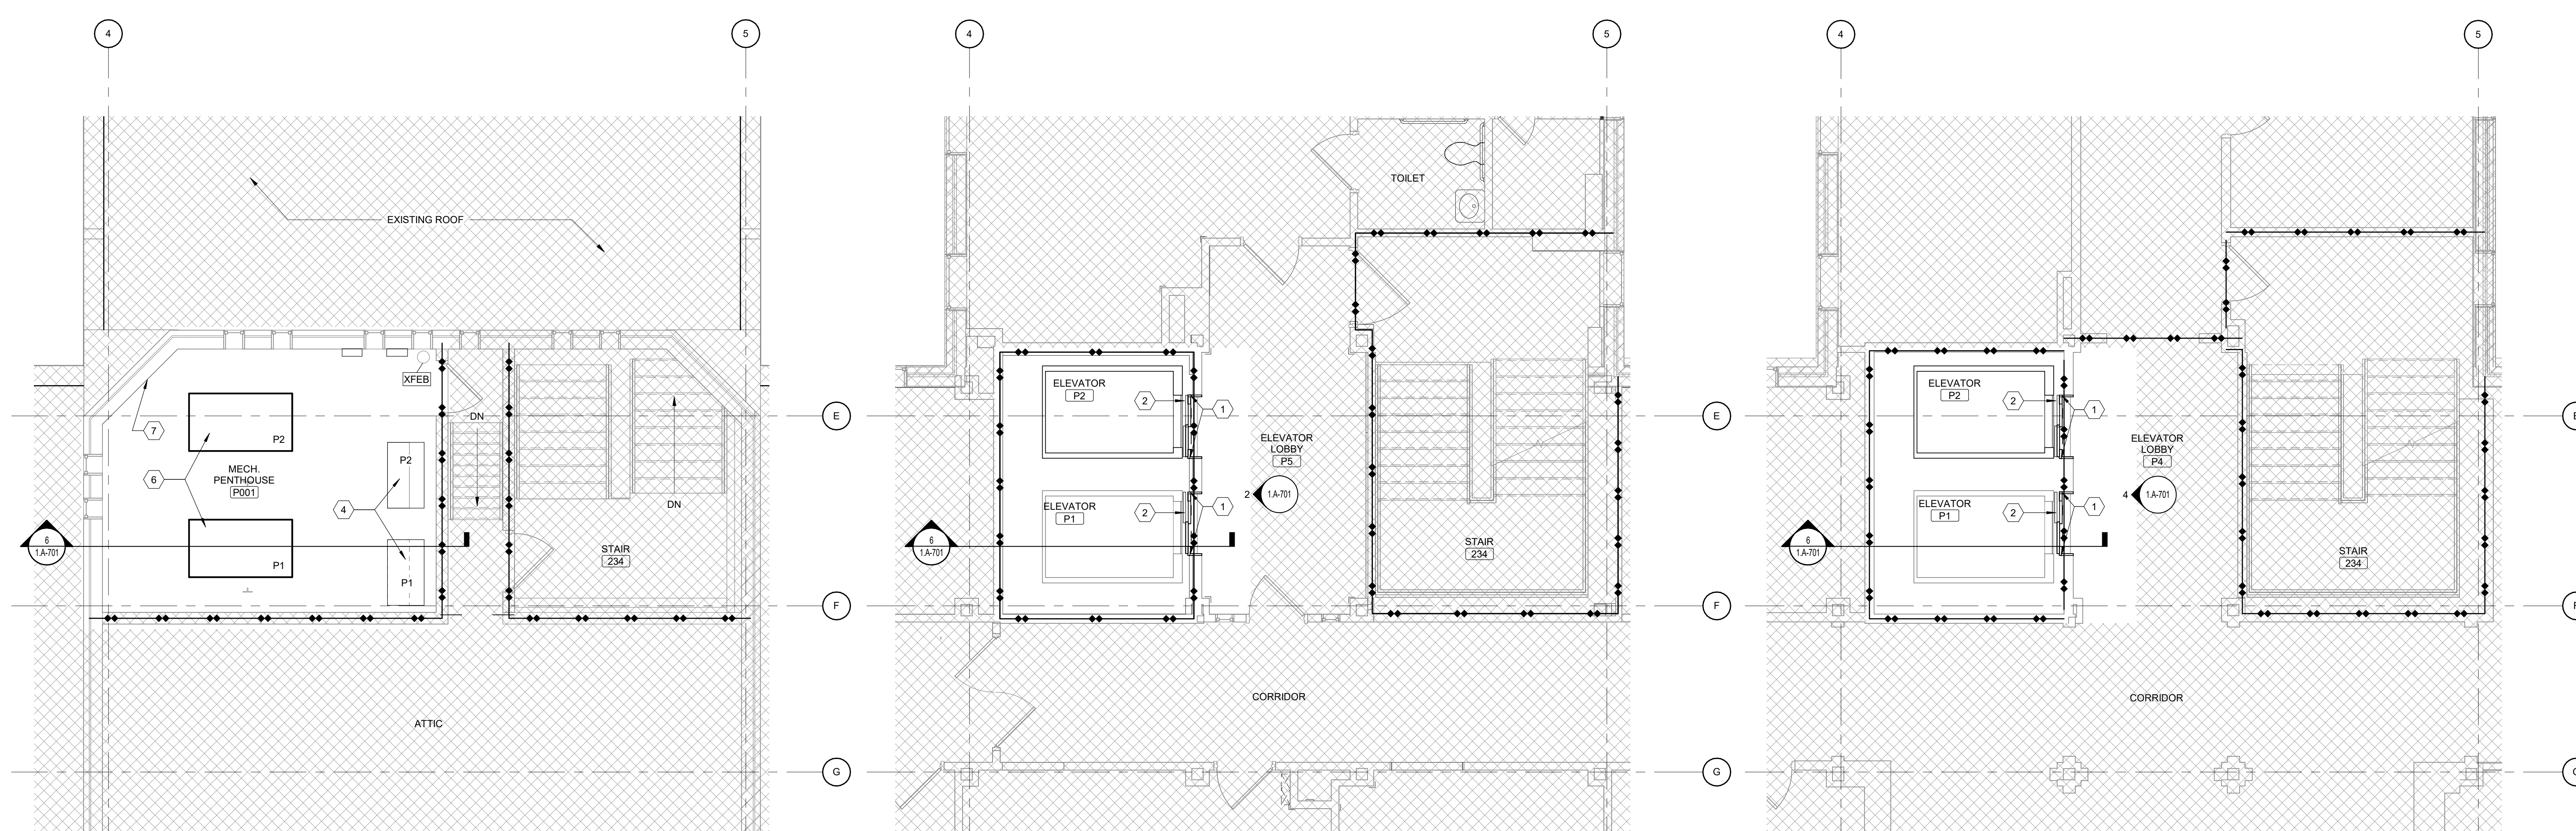

5 BUILDING 1 PARTIAL MECHANICAL PENTHOUSE PLAN - P1-P2 ELEV.
Scale: 1/4" = 1'-0"

3 BUILDING 1 PARTIAL THIRD FLOOR PLAN - P1-P2 ELEV.
Scale: 1/4" = 1'-0"

1 BUILDING 1 PARTIAL FIRST FLOOR PLAN - P1-P2 ELEV.
Scale: 1/4" = 1'-0"

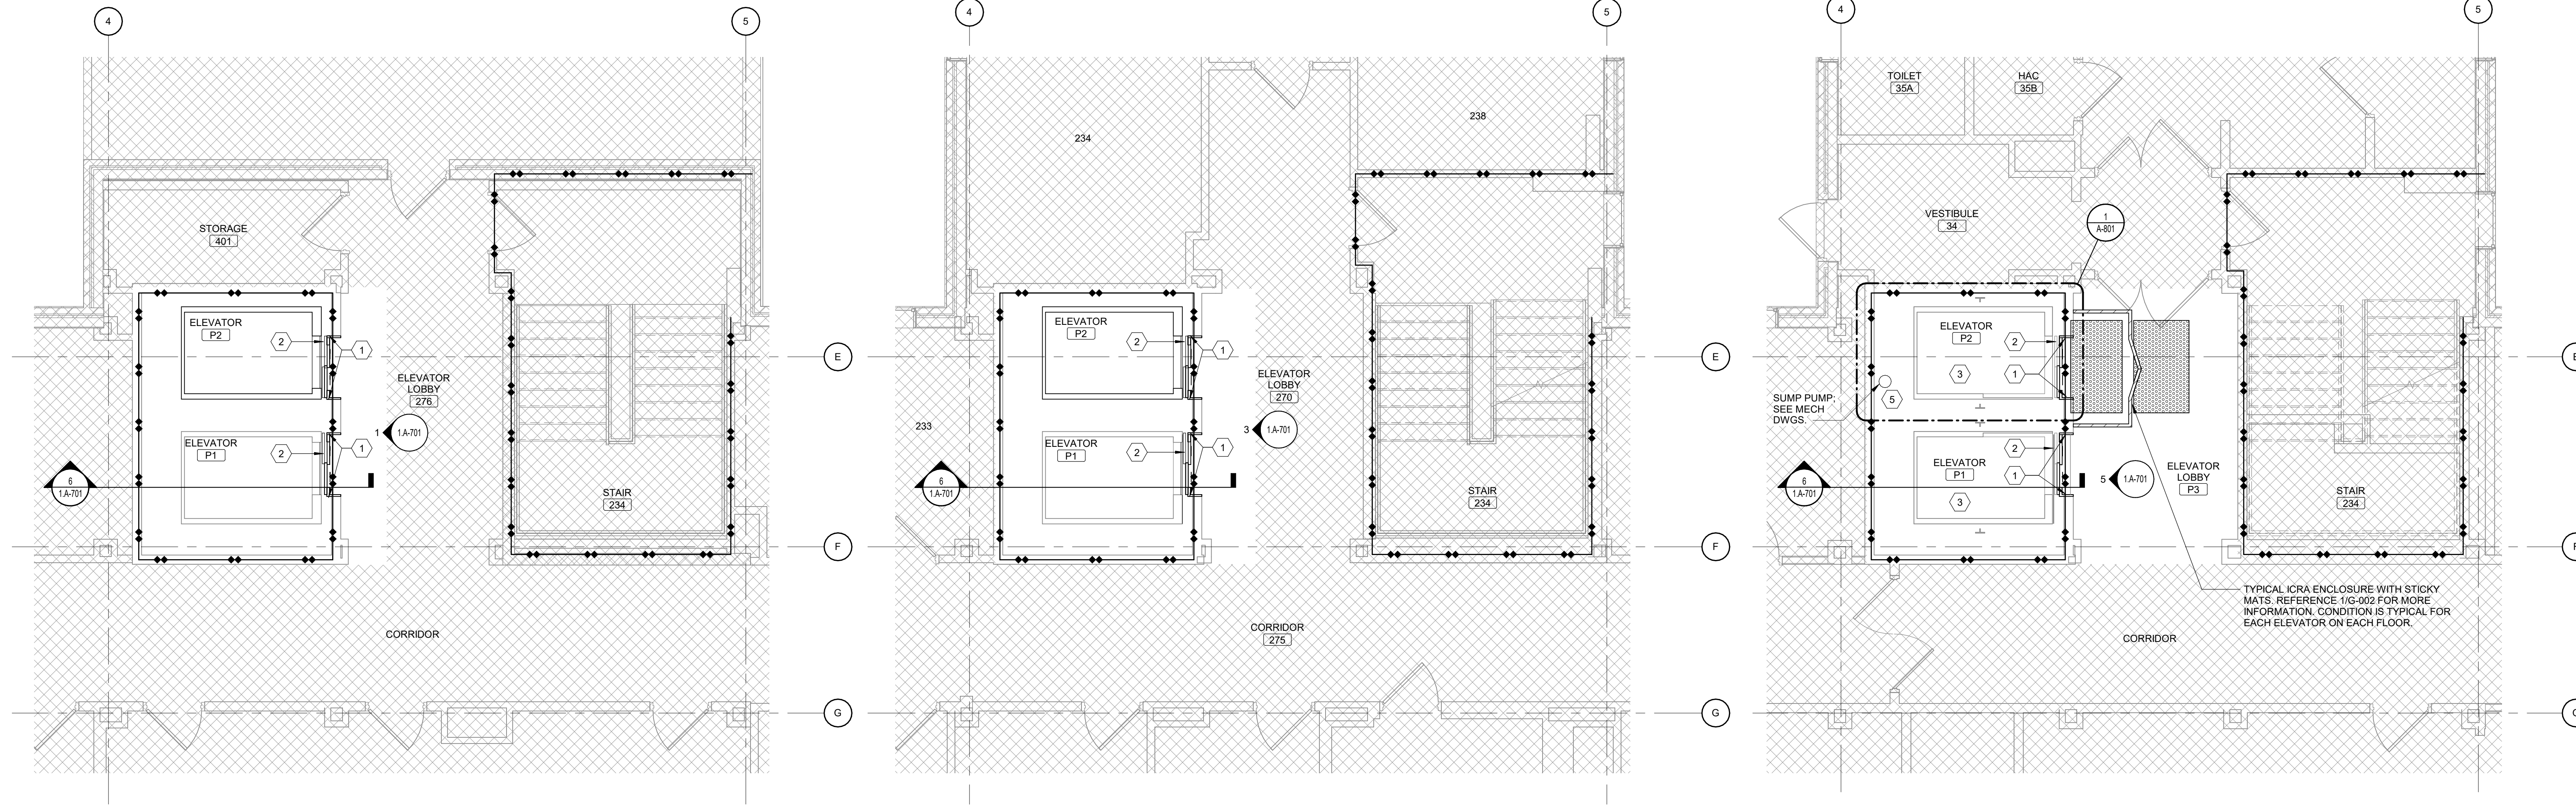

6 BUILDING 1 PARTIAL FOURTH FLOOR PLAN - P1-P2 ELEV.
Scale: 1/4" = 1'-0"

4 BUILDING 1 PARTIAL SECOND FLOOR PLAN - P1-P2 ELEV.
Scale: 1/4" = 1'-0"

2 BUILDING 1 PARTIAL BASEMENT FLOOR PLAN - P1-P2 ELEV.
Scale: 1/4" = 1'-0"

SHEET NOTES:

- REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
- REFER TO SHEET A-801 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
- REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
- NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
- CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.
- NO WORK ON ELEVATOR SYSTEM TO BE COMPLETED PRIOR TO DELIVERY OF ALL COMPONENTS AND EQUIPMENT. ONCE ELEVATOR IS REMOVED FROM SERVICE FOR THE MODERNIZATION, CONTRACTOR TO CONTINUALLY MAN THE ELEVATOR MODERNIZATION WITH QUALIFIED ELEVATOR CREW ON THE NORMAL WORKING DAYS.
- ONLY ONE ELEVATOR IN EACH GROUP SHALL BE WORKED ON. IF ANY WORK REQUIRING SHUTDOWN OF POWER, LOSS OF GROUP OPERATION, OR ALL ELEVATORS IN THE BANK TO BE OUT OF SERVICE, WORK SHALL BE CONDUCTED AFTER HOURS AS DETERMINED BY THE VA.

KEY NOTES:

- REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- NEW STAINLESS STEEL HOISTWAY DOORS.
- PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-801.
- REMOVE AND REPLACE CONTROLLER.
- NEW SUMP PUMP.
- REMOVE AND REPLACE ELEVATOR MOTOR.
- PATCH AND REPAIR WALL TO MATCH EXISTING FROM HEAT PUMP REMOVAL.

LEAD PAINT LOCATIONS

- LIGHT-GRAY PAINT ON PLASTER WALL, BUILDING 1 - 1ST FLOOR, ELEVATOR LOBBY.

ICRA LEGEND

- PLASTIC SHEET ICRA BARRIER
- ZIPPER DOOR
- STICKY MATS

NEW WORK LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- NEW WALL
- NEW DOOR
- NEW WINDOW
- NOT IN PROJECT SCOPE

KEY PLAN

SCALE: NO SCALE


AREA OF WORK

WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS


CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title BUILDING 1 PARTIAL FLOOR PLANS - P1 & P2		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
			APOGEE CONSULTING GROUP, P.A. 52644 RALEIGH, NC		David J. Reichert 5070 NORTH CAROLINA		Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		Approved		Building Number 1	
							Location TUSCALOOSA VAMC		Date FEBRUARY 6, 2025		Checked DJR	
									Drawn LBB		Drawing Number 1.A-100	
											Dwg 2 of 21	

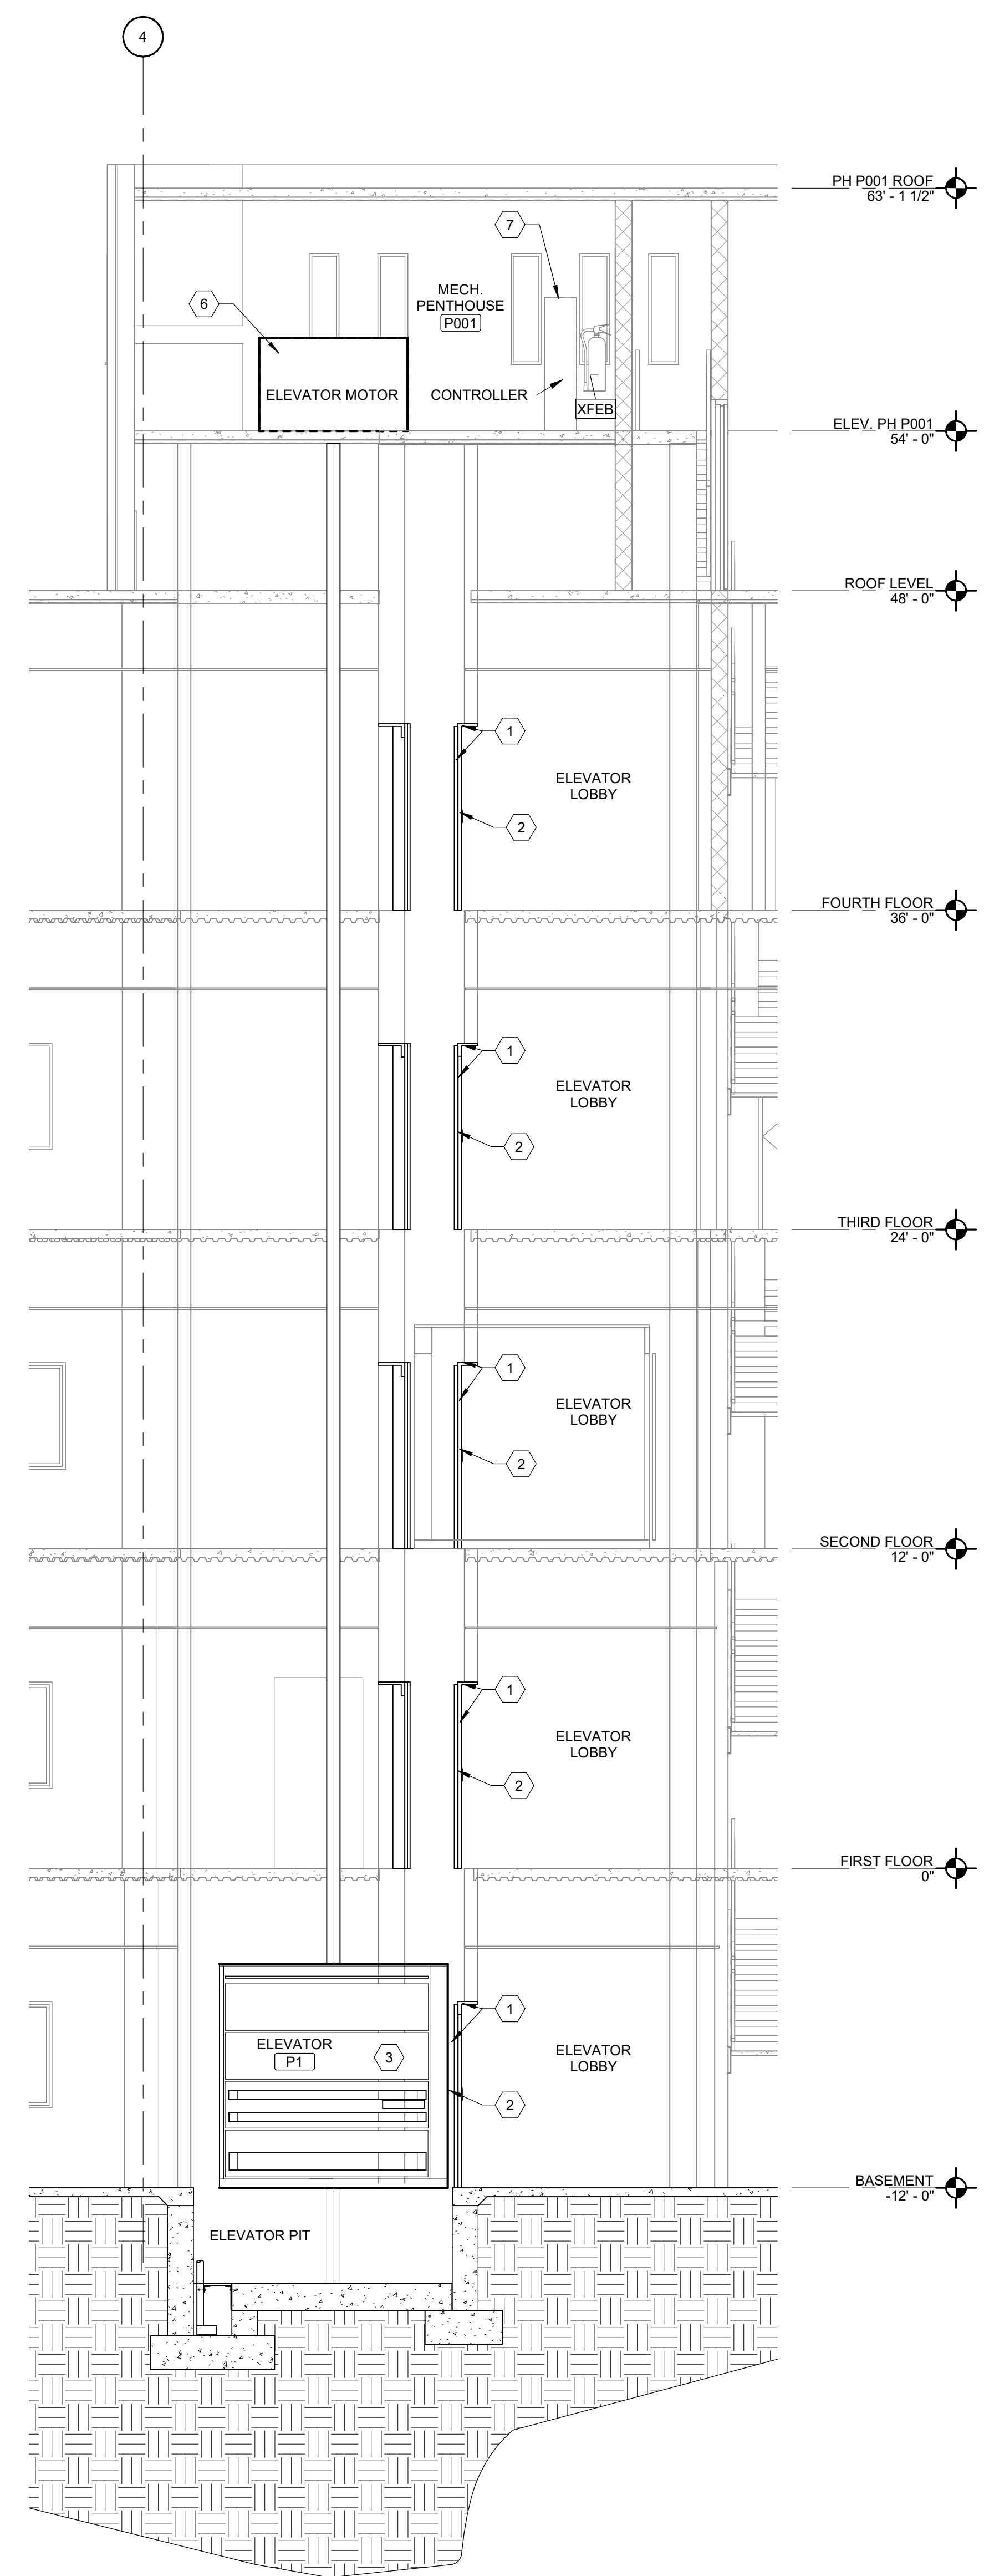


6 SECTION THROUGH ELEVATORS P1 AND P2
Scale: 1/4" = 1'-0"

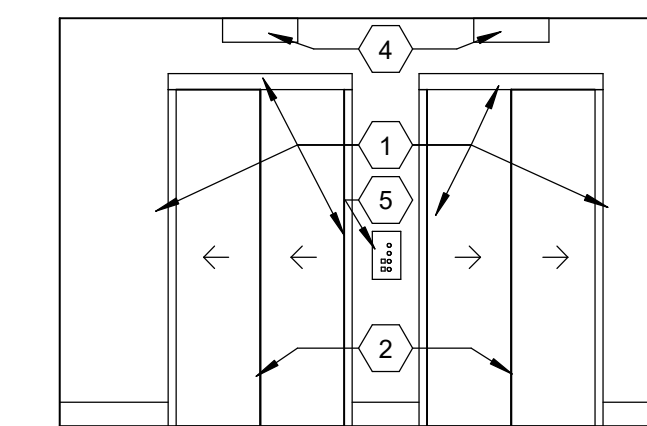


1 ELEVATORS @ FOURTH FLOOR - BLDG 1 - P1 & P2
Scale: 1/4" = 1'-0"

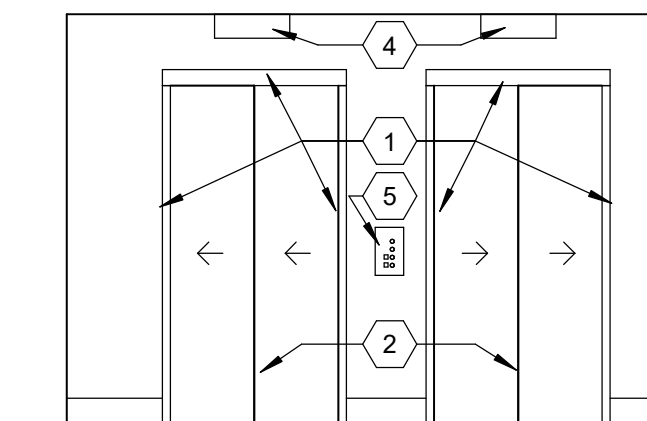


2 ELEVATORS @ THIRD FLOOR - BLDG 1 - P1 & P2
Scale: 1/4" = 1'-0"

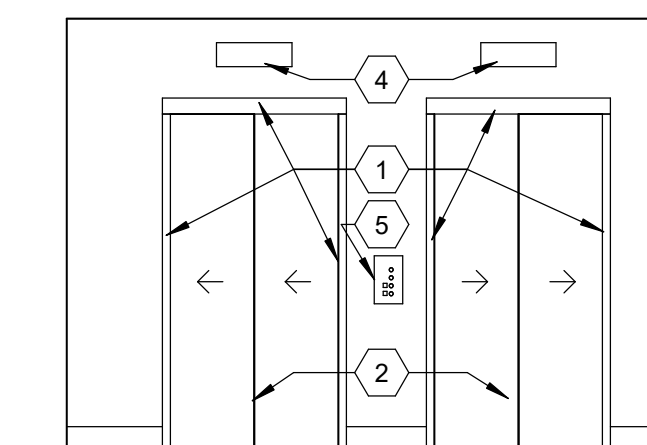

3 ELEVATORS @ SECOND FLOOR - BLDG 1 - P1 & P2
Scale: 1/4" = 1'-0"

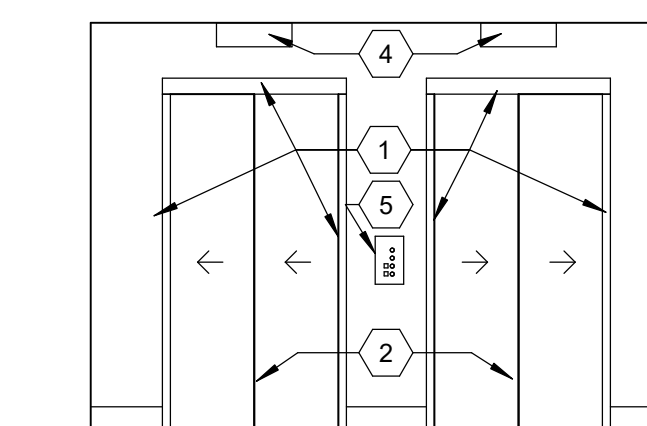

4 ELEVATORS @ FIRST FLOOR - BLDG 1 - P1 & P2
Scale: 1/4" = 1'-0"

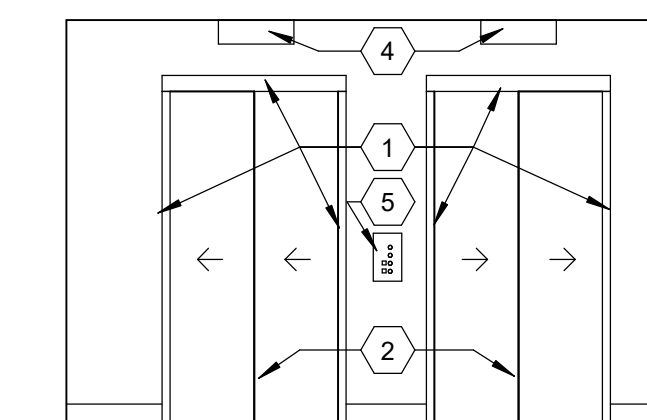

5 ELEVATORS @ BASEMENT FLOOR - BLDG 1 - P1 & P2
Scale: 1/4" = 1'-0"

SHEET NOTES:

- | | |
|----|--|
| 1. | REFER TO SHEET A-601 FOR PARTITION TYPES AND DETAILS. |
| 2. | REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS. |
| 3. | REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND. |
| 4. | REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN. |
| 5. | THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION. |
| 6. | NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK. |
| 7. | CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL CANS, ETC. EQUIPMENT BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING. |
| 8. | ONLY ONE ELEVATOR IN EACH GROUP SHALL BE WORKED ON IF ANY WORK REQUIRING SHUTDOWN OF POWER, LOSS-OF GROUP OPERATION, OR ALL ELEVATORS IN THE BANK TO BE OUT OF SERVICE, WORK SHALL BE CONDUCTED AFTER HOURS AS DETERMINED BY THE VA. |
| 9. | PROVIDE PROPER SAFETY SHROUDING BETWEEN ELEVATORS 1-2 PRIOR TO STARTING MODERNIZATION. UPON THE COMPLETION OF THE MODERNIZATION OF ELEVATORS 1-2, CONTRACTOR TO REMOVE SHROUDING. |


市

KEY NOTES:


- 1 REFINISH EXISTING STAINLESS STEEL ENTRANCE FRAME
AT HEAD AND BOTH JAMBS.
- 2 NEW STAINLESS STEEL HOISTWAY DOORS.
- 3 PROVIDE NEW ELEVATOR INTERIOR FINISHES,
CONTROL PANELS, ETC. FOR COMPLETE
INSTALLATION, SEE A-801.
- 4 NEW HALL LANTERN, EXISTING BACK BOXES TO
REMAIN.
- 5 NEW CALL BUTTONS, EXISTING BACK BOXES TO
REMAIN.
- 6 REMOVE AND REPLACE ELEVATOR MOTOR.
- 7 REMOVE AND REPLACE ELEVATOR CONTROLLER.

FULLY SPRINKLERED
100% BID DOCUMENTS


[illegible]

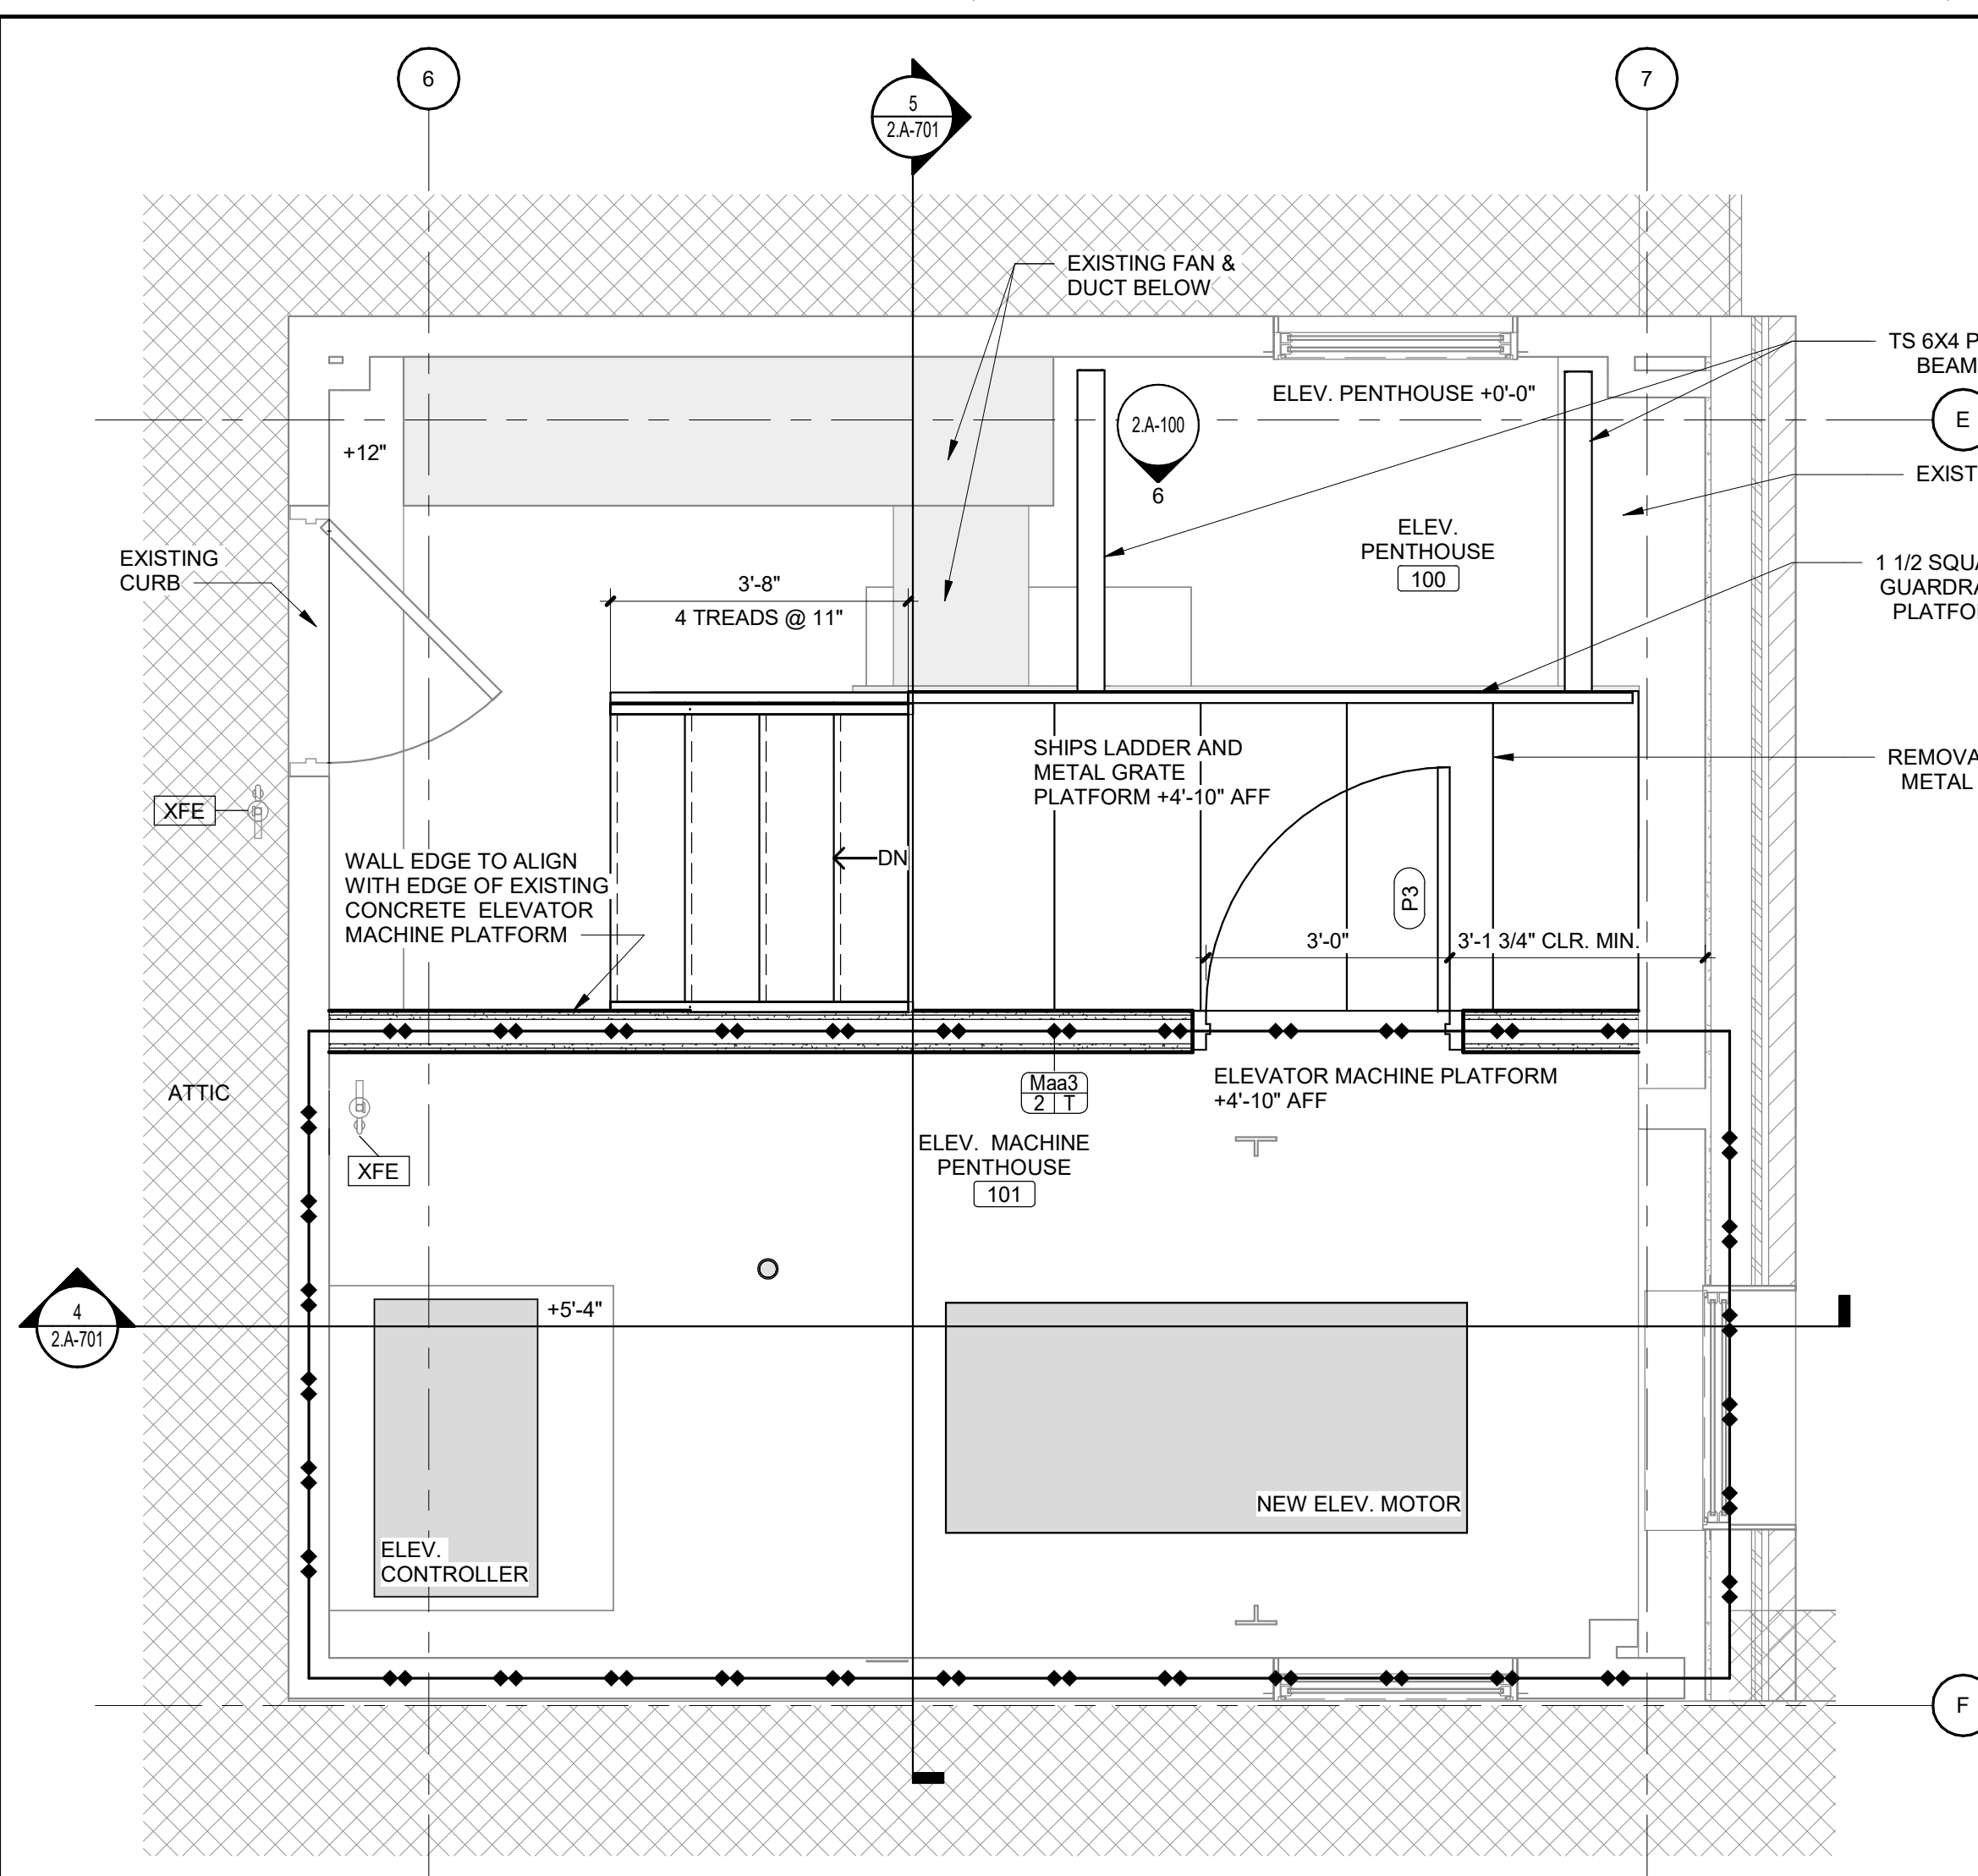


5 BUILDING 2 PARTIAL ATTIC FLOOR PLAN
Scale: 1/2" = 1'-0"

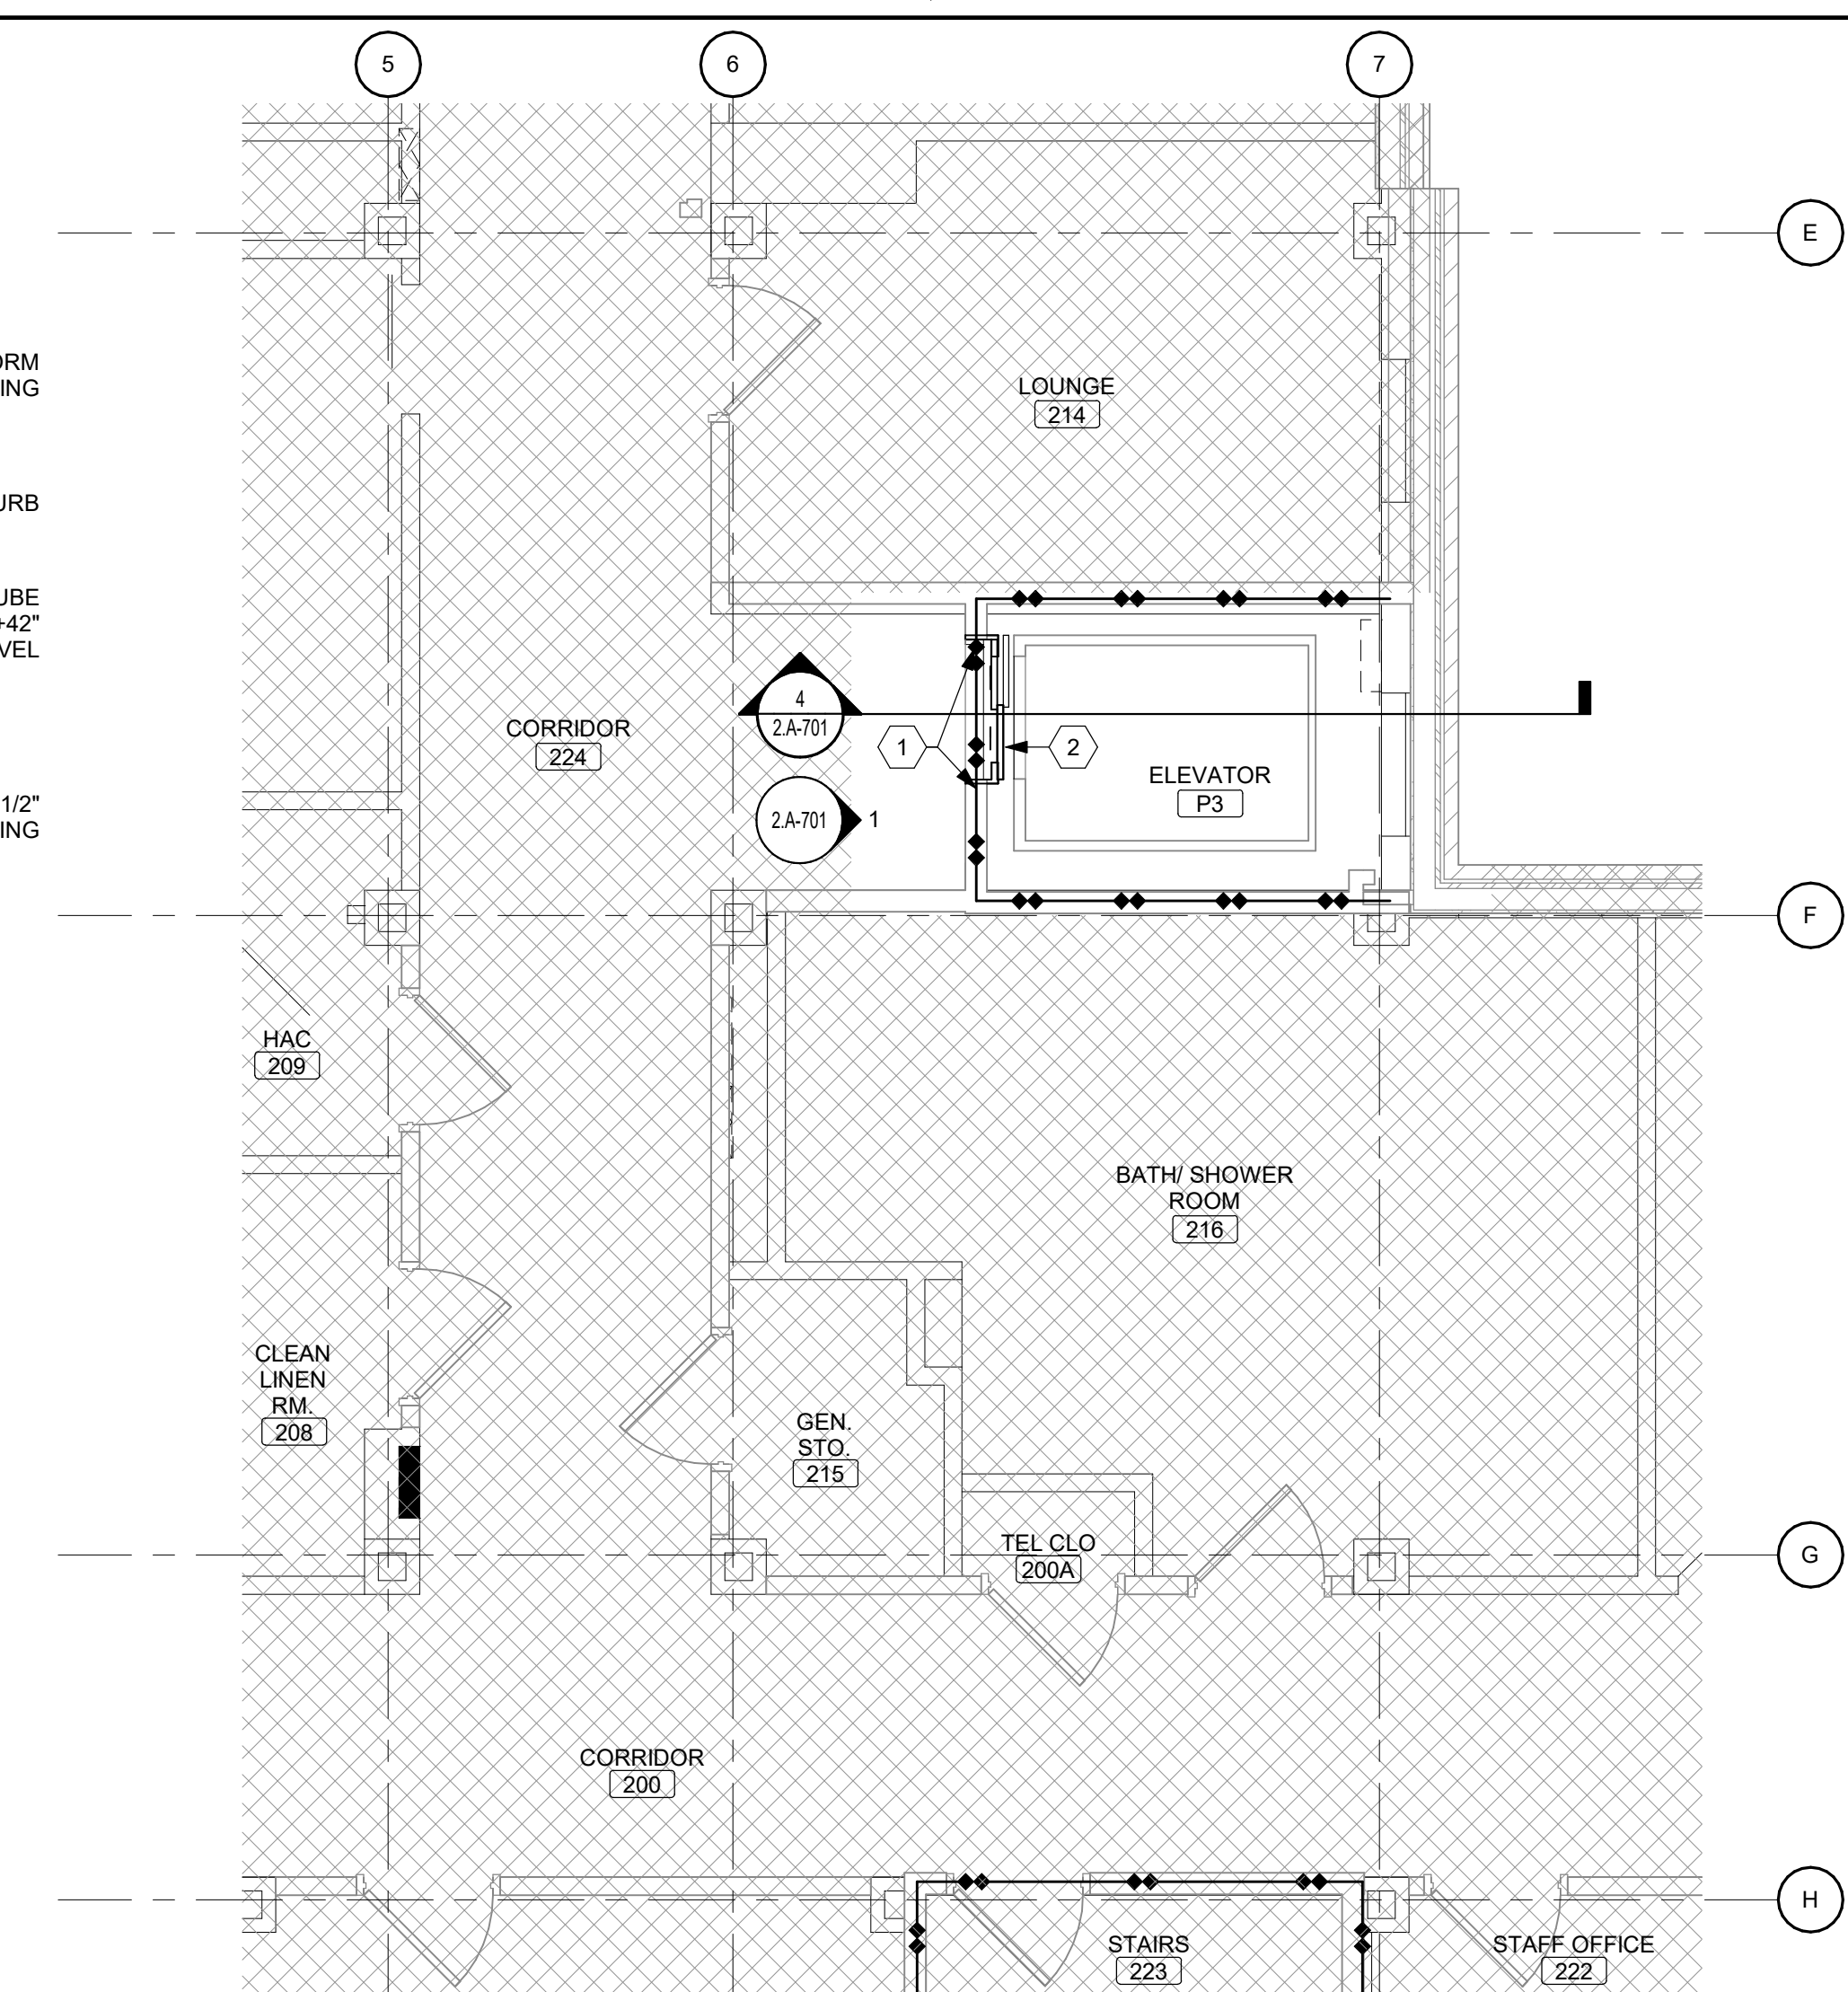


3 BUILDING 2 PARTIAL SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"

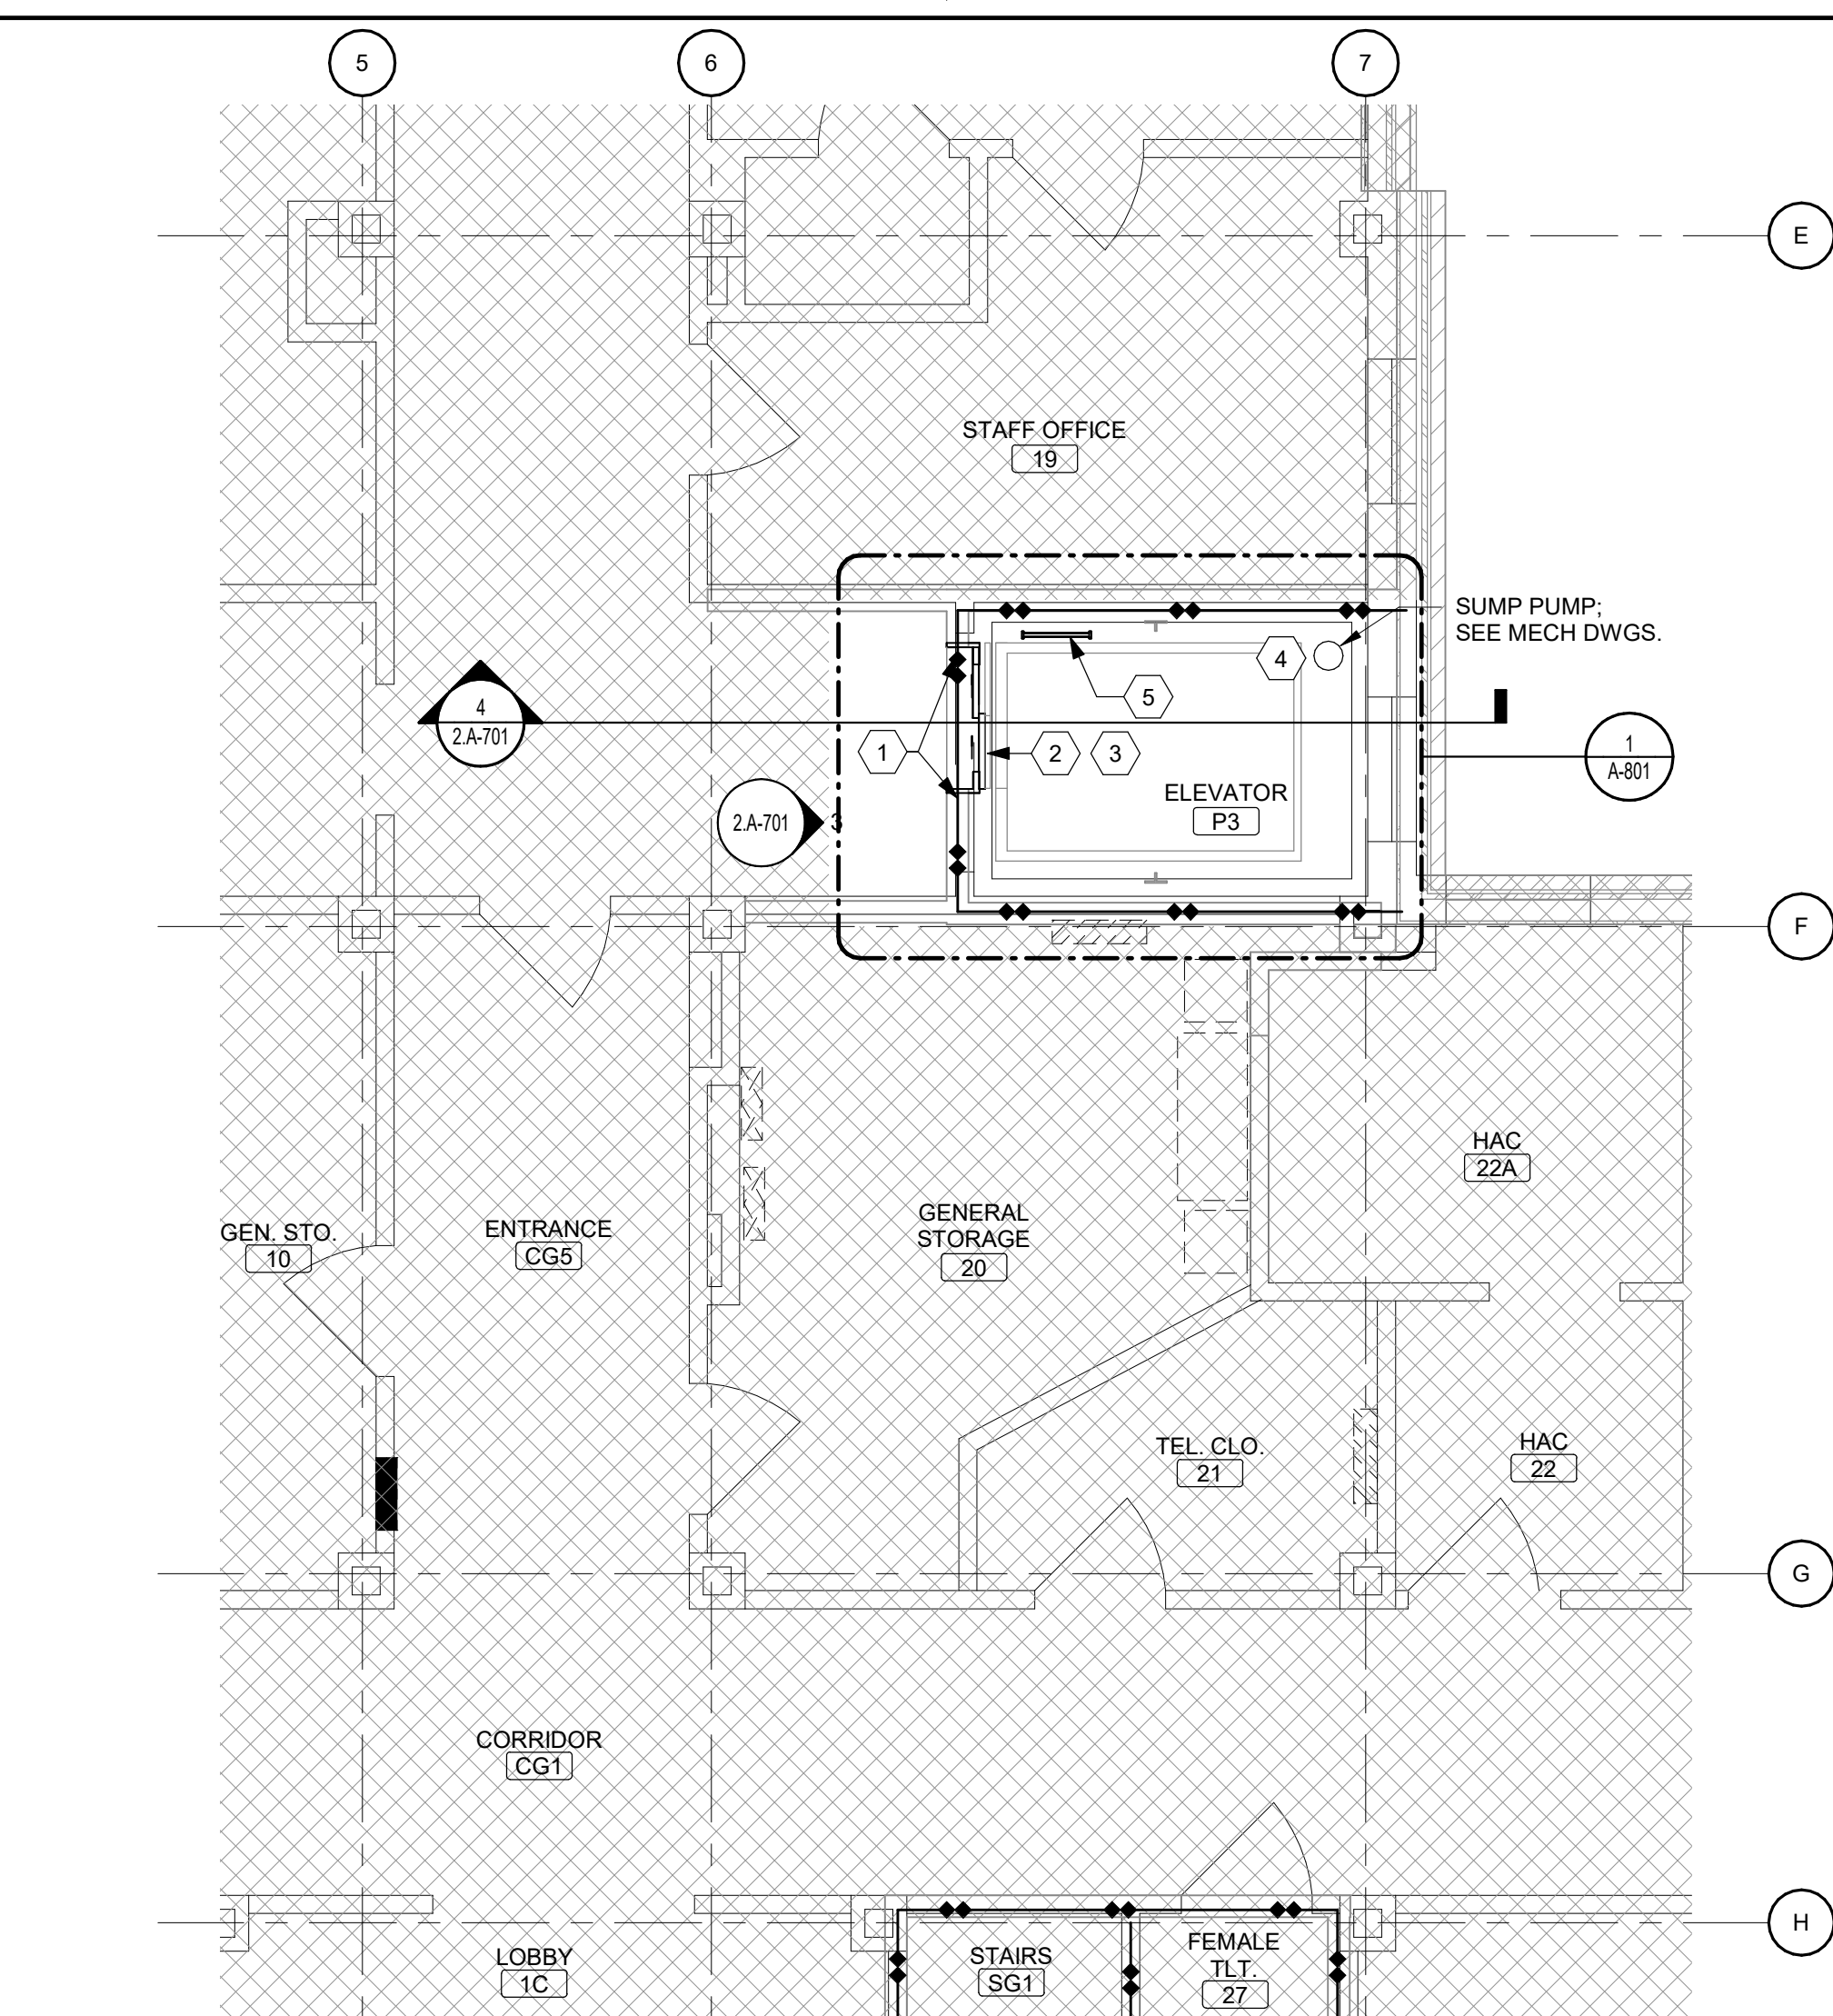


1 BUILDING 2 PARTIAL GROUND FLOOR PLAN
Scale: 1/4" = 1'-0"

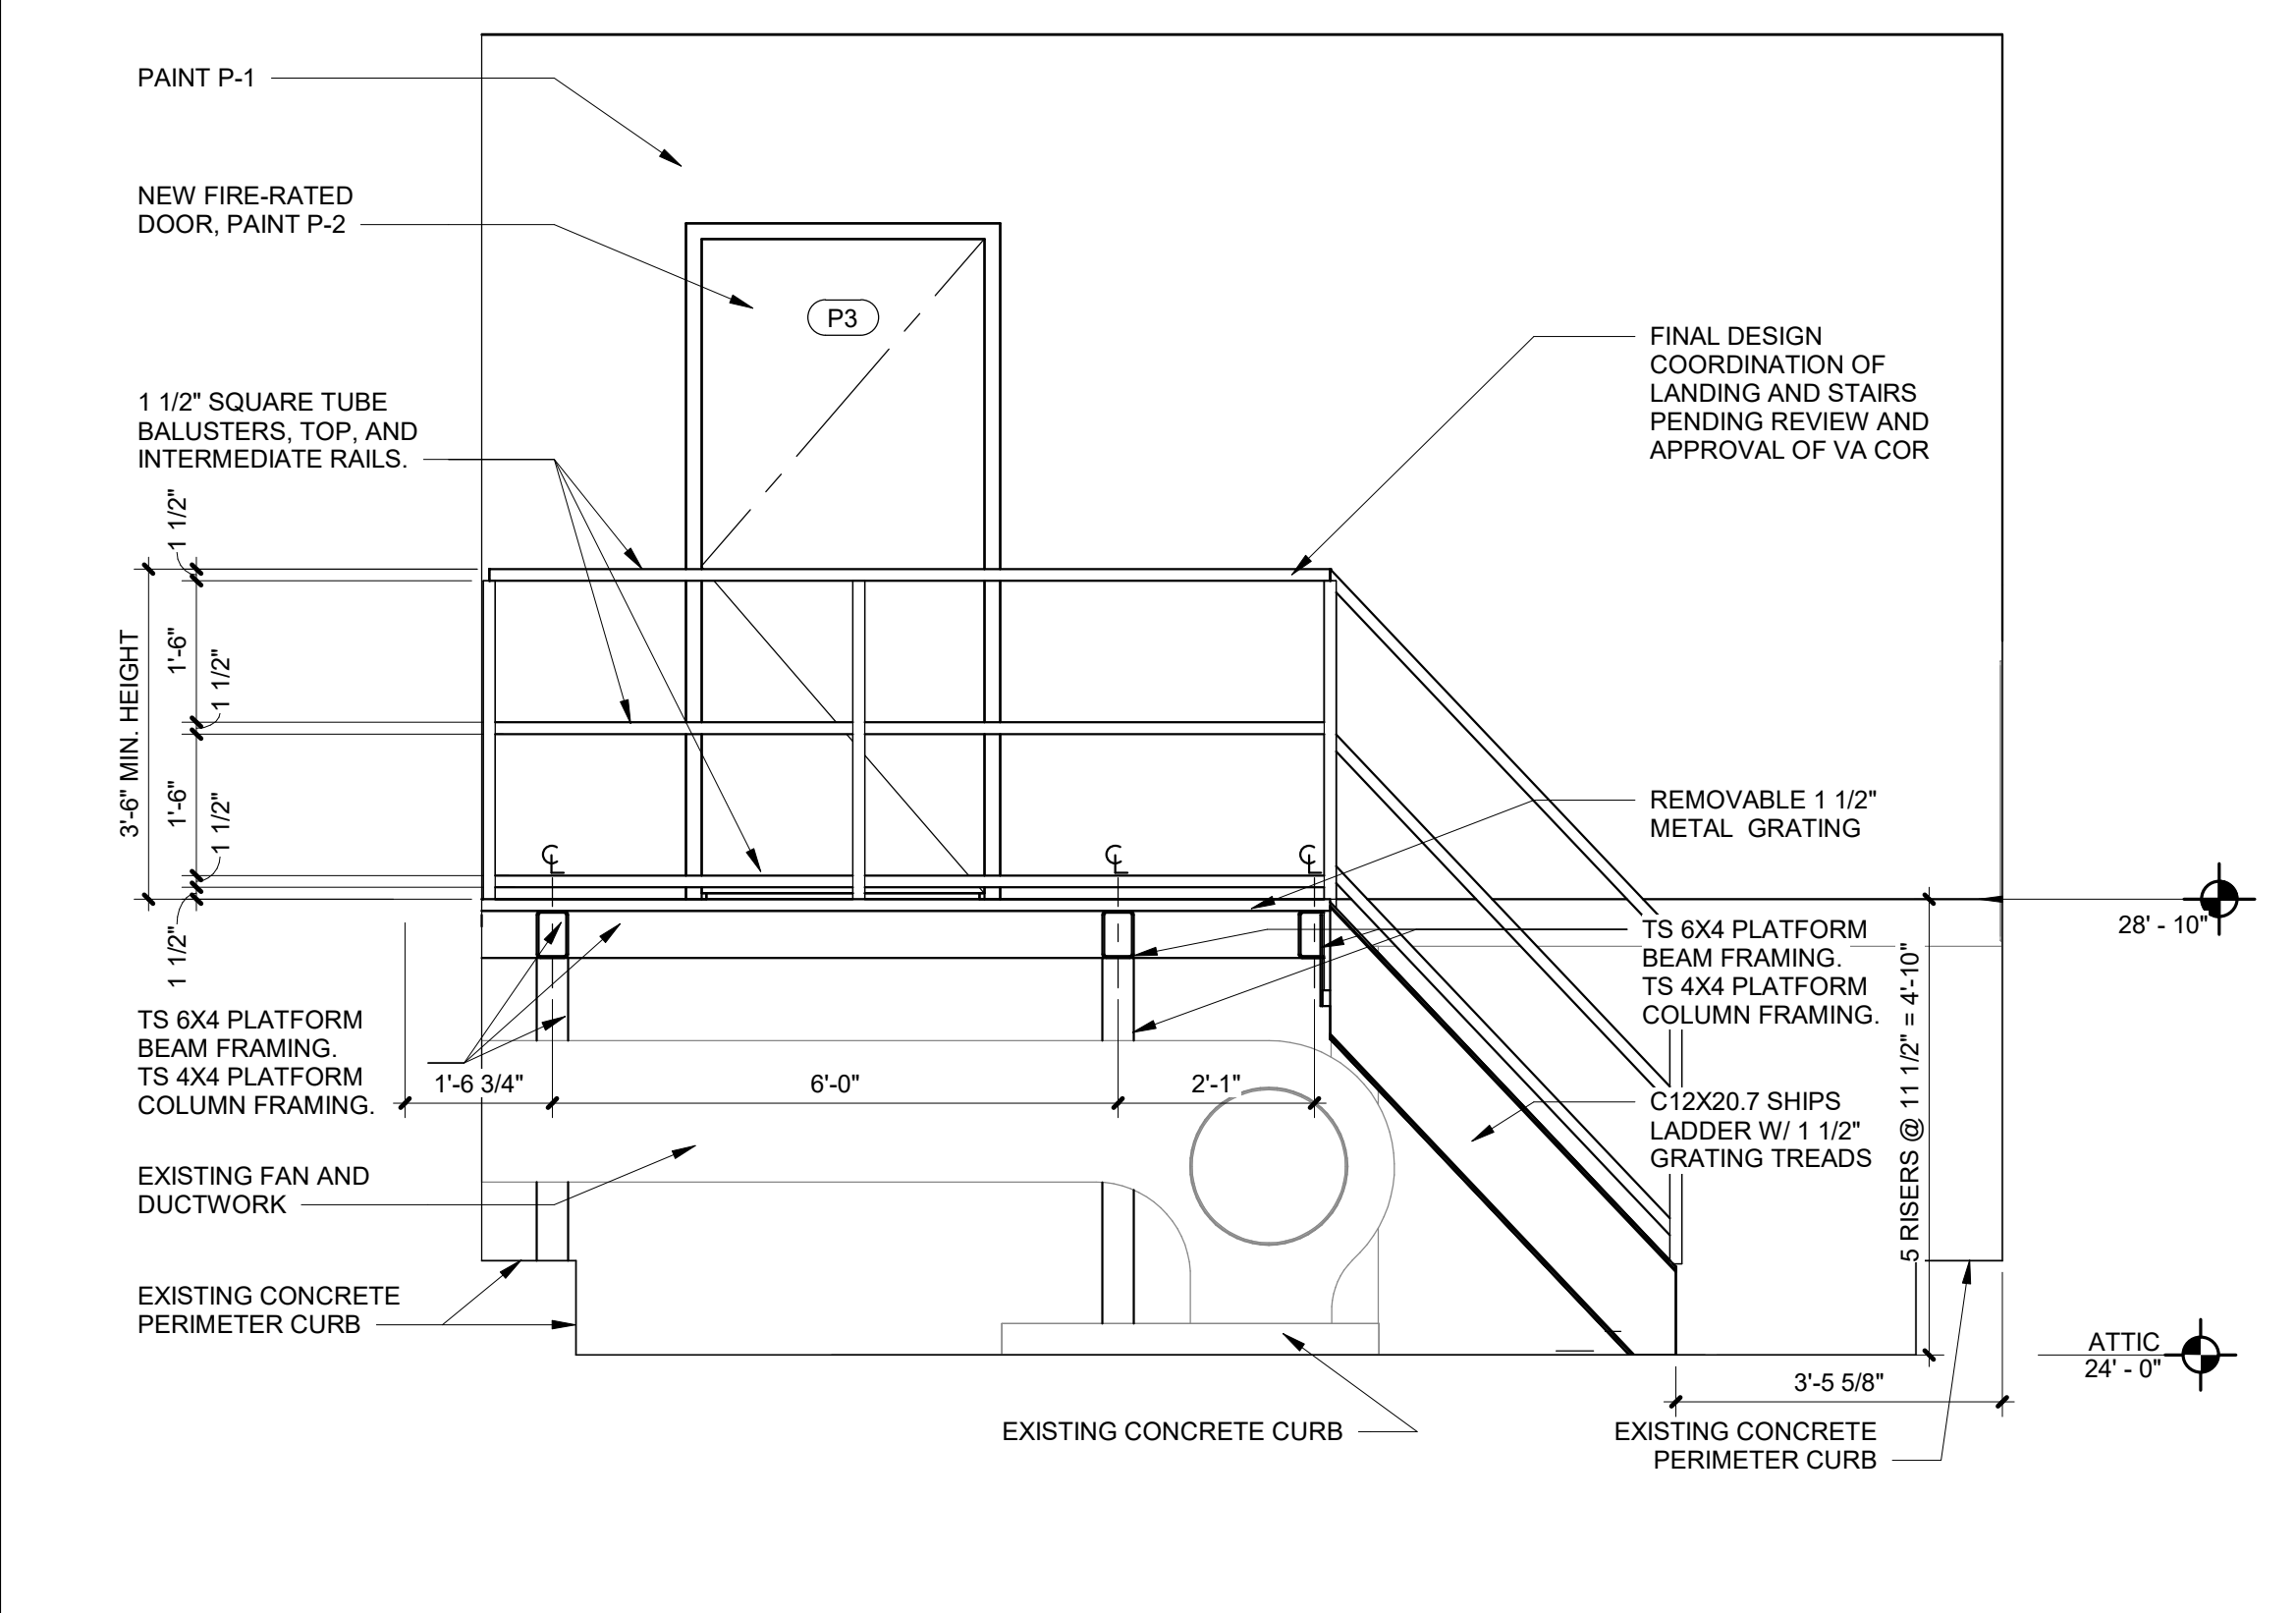

6 INT ELEV - ELEVATOR MECHANICAL ROOM
Scale: 1/2" = 1'-0"

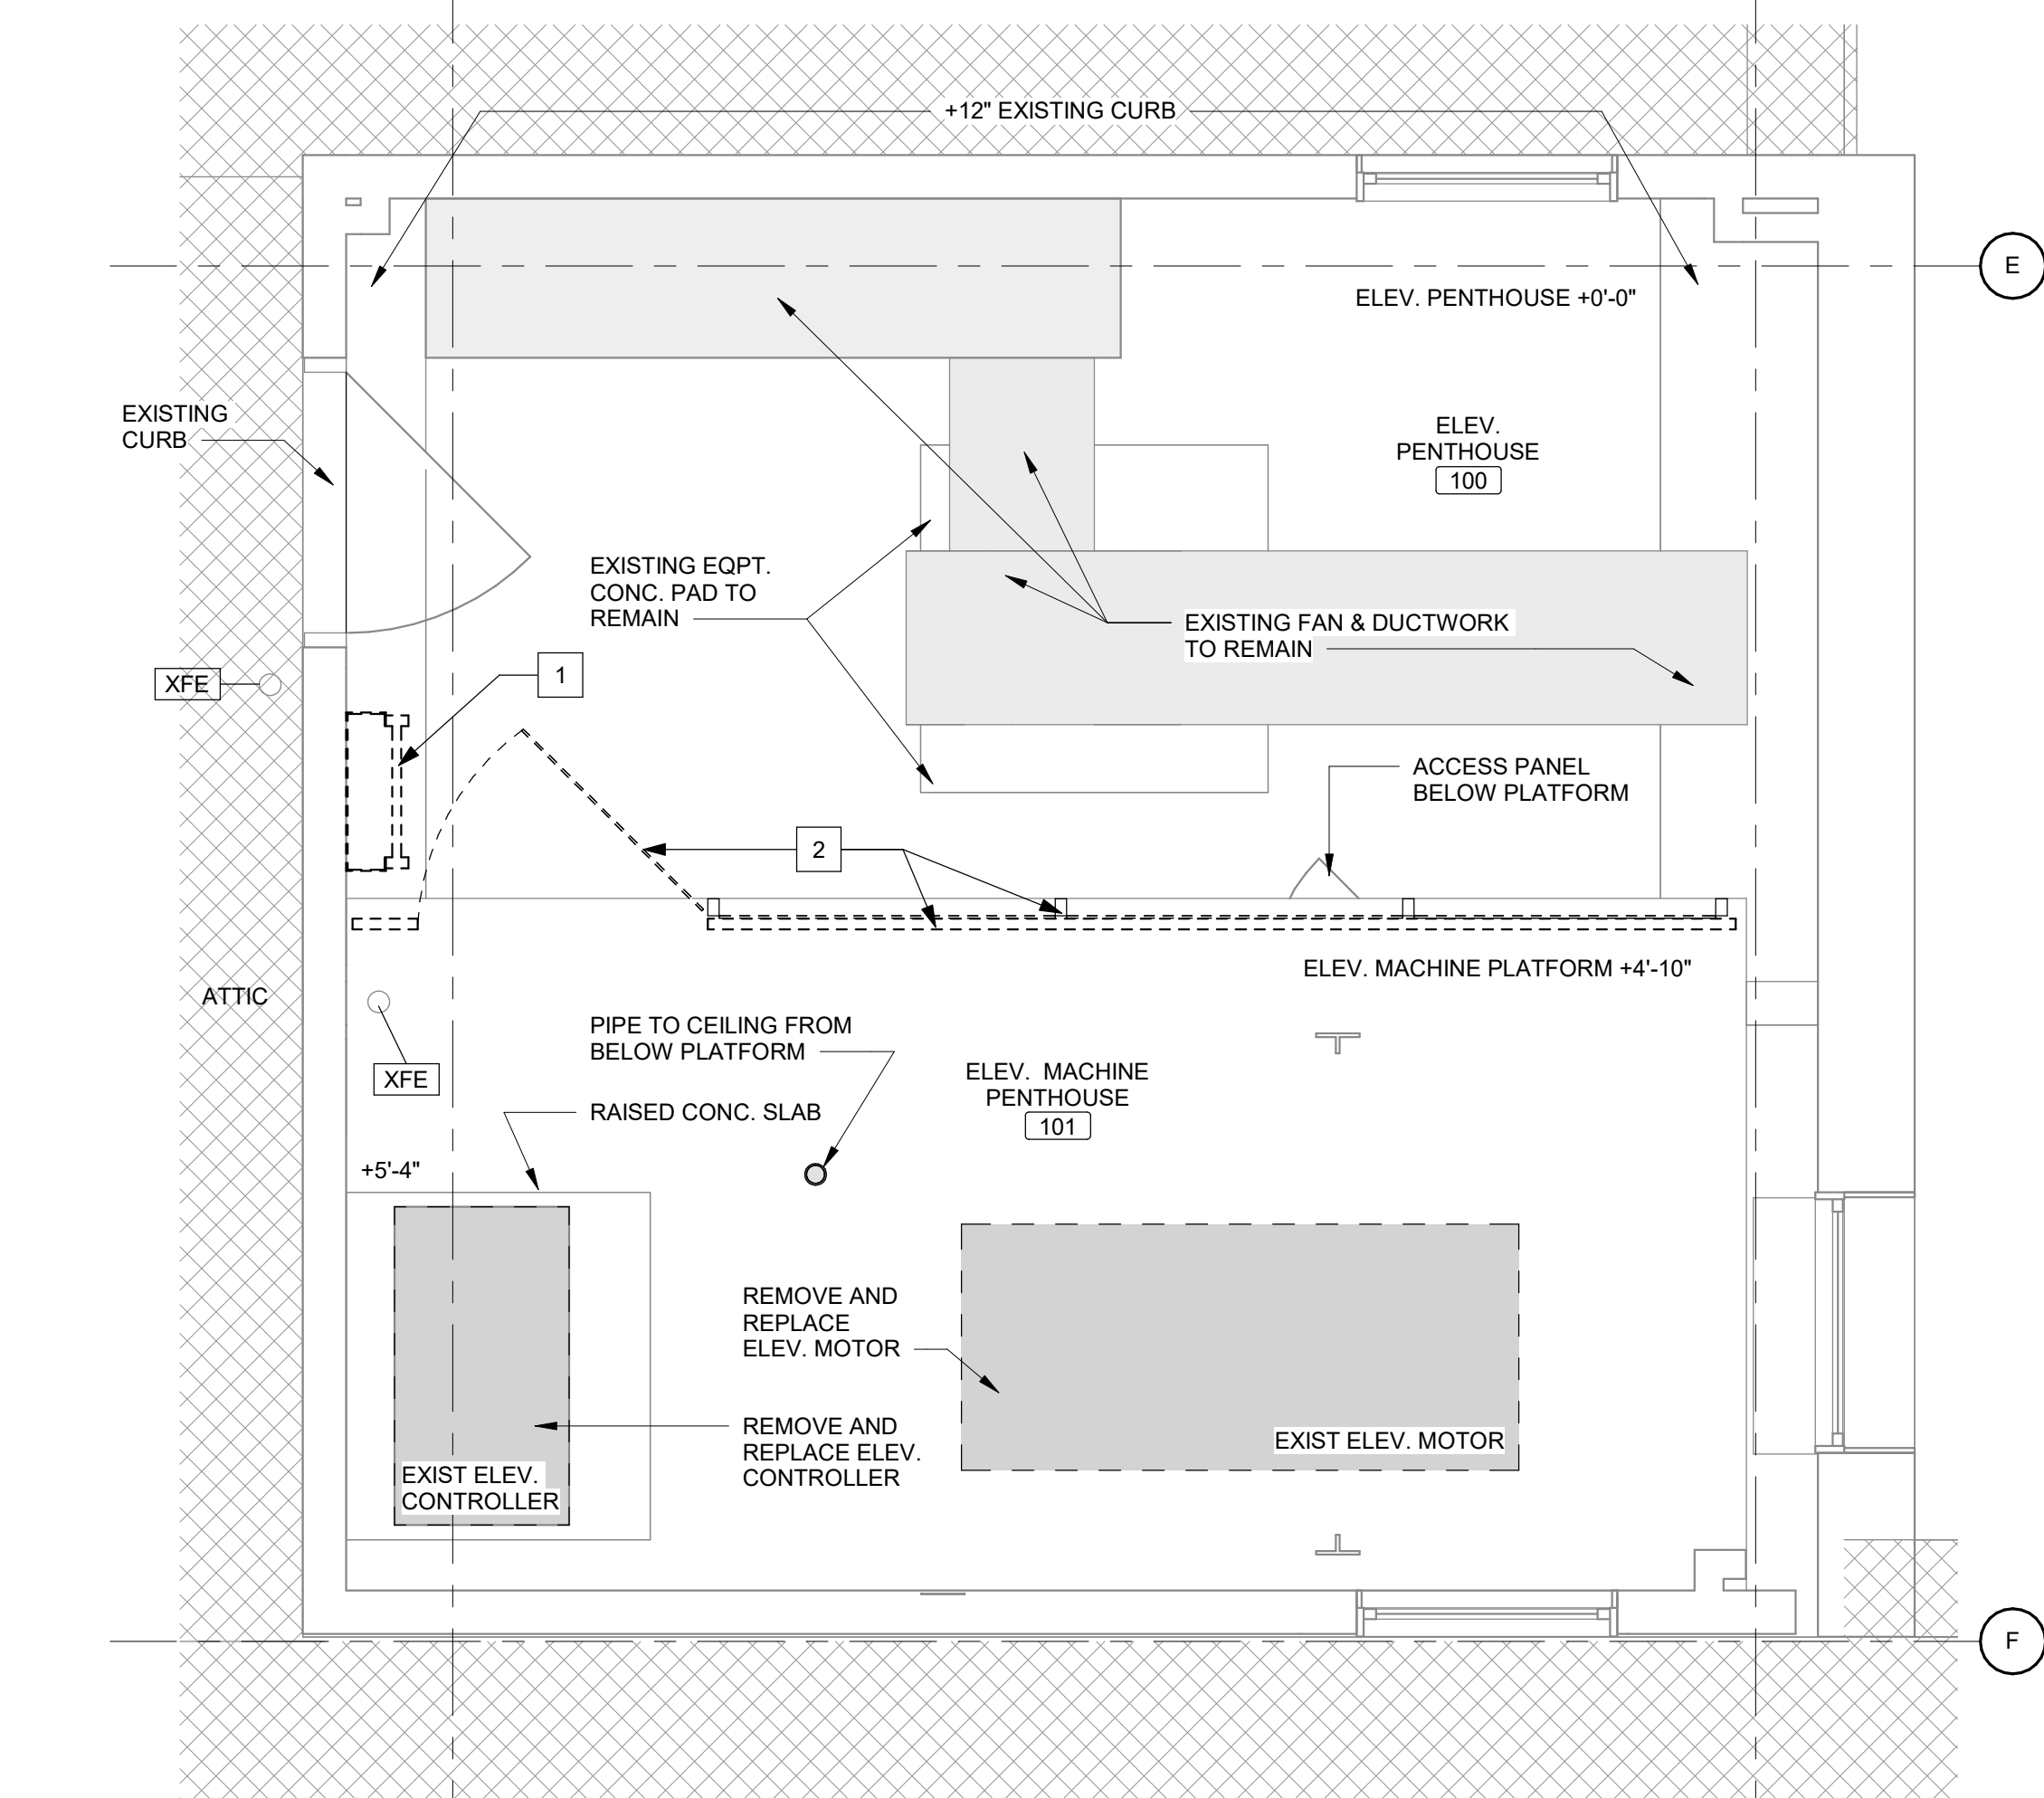

4 BUILDING 2 PARTIAL ATTIC DEMOLITION PLAN
Scale: 1/2" = 1'-0"

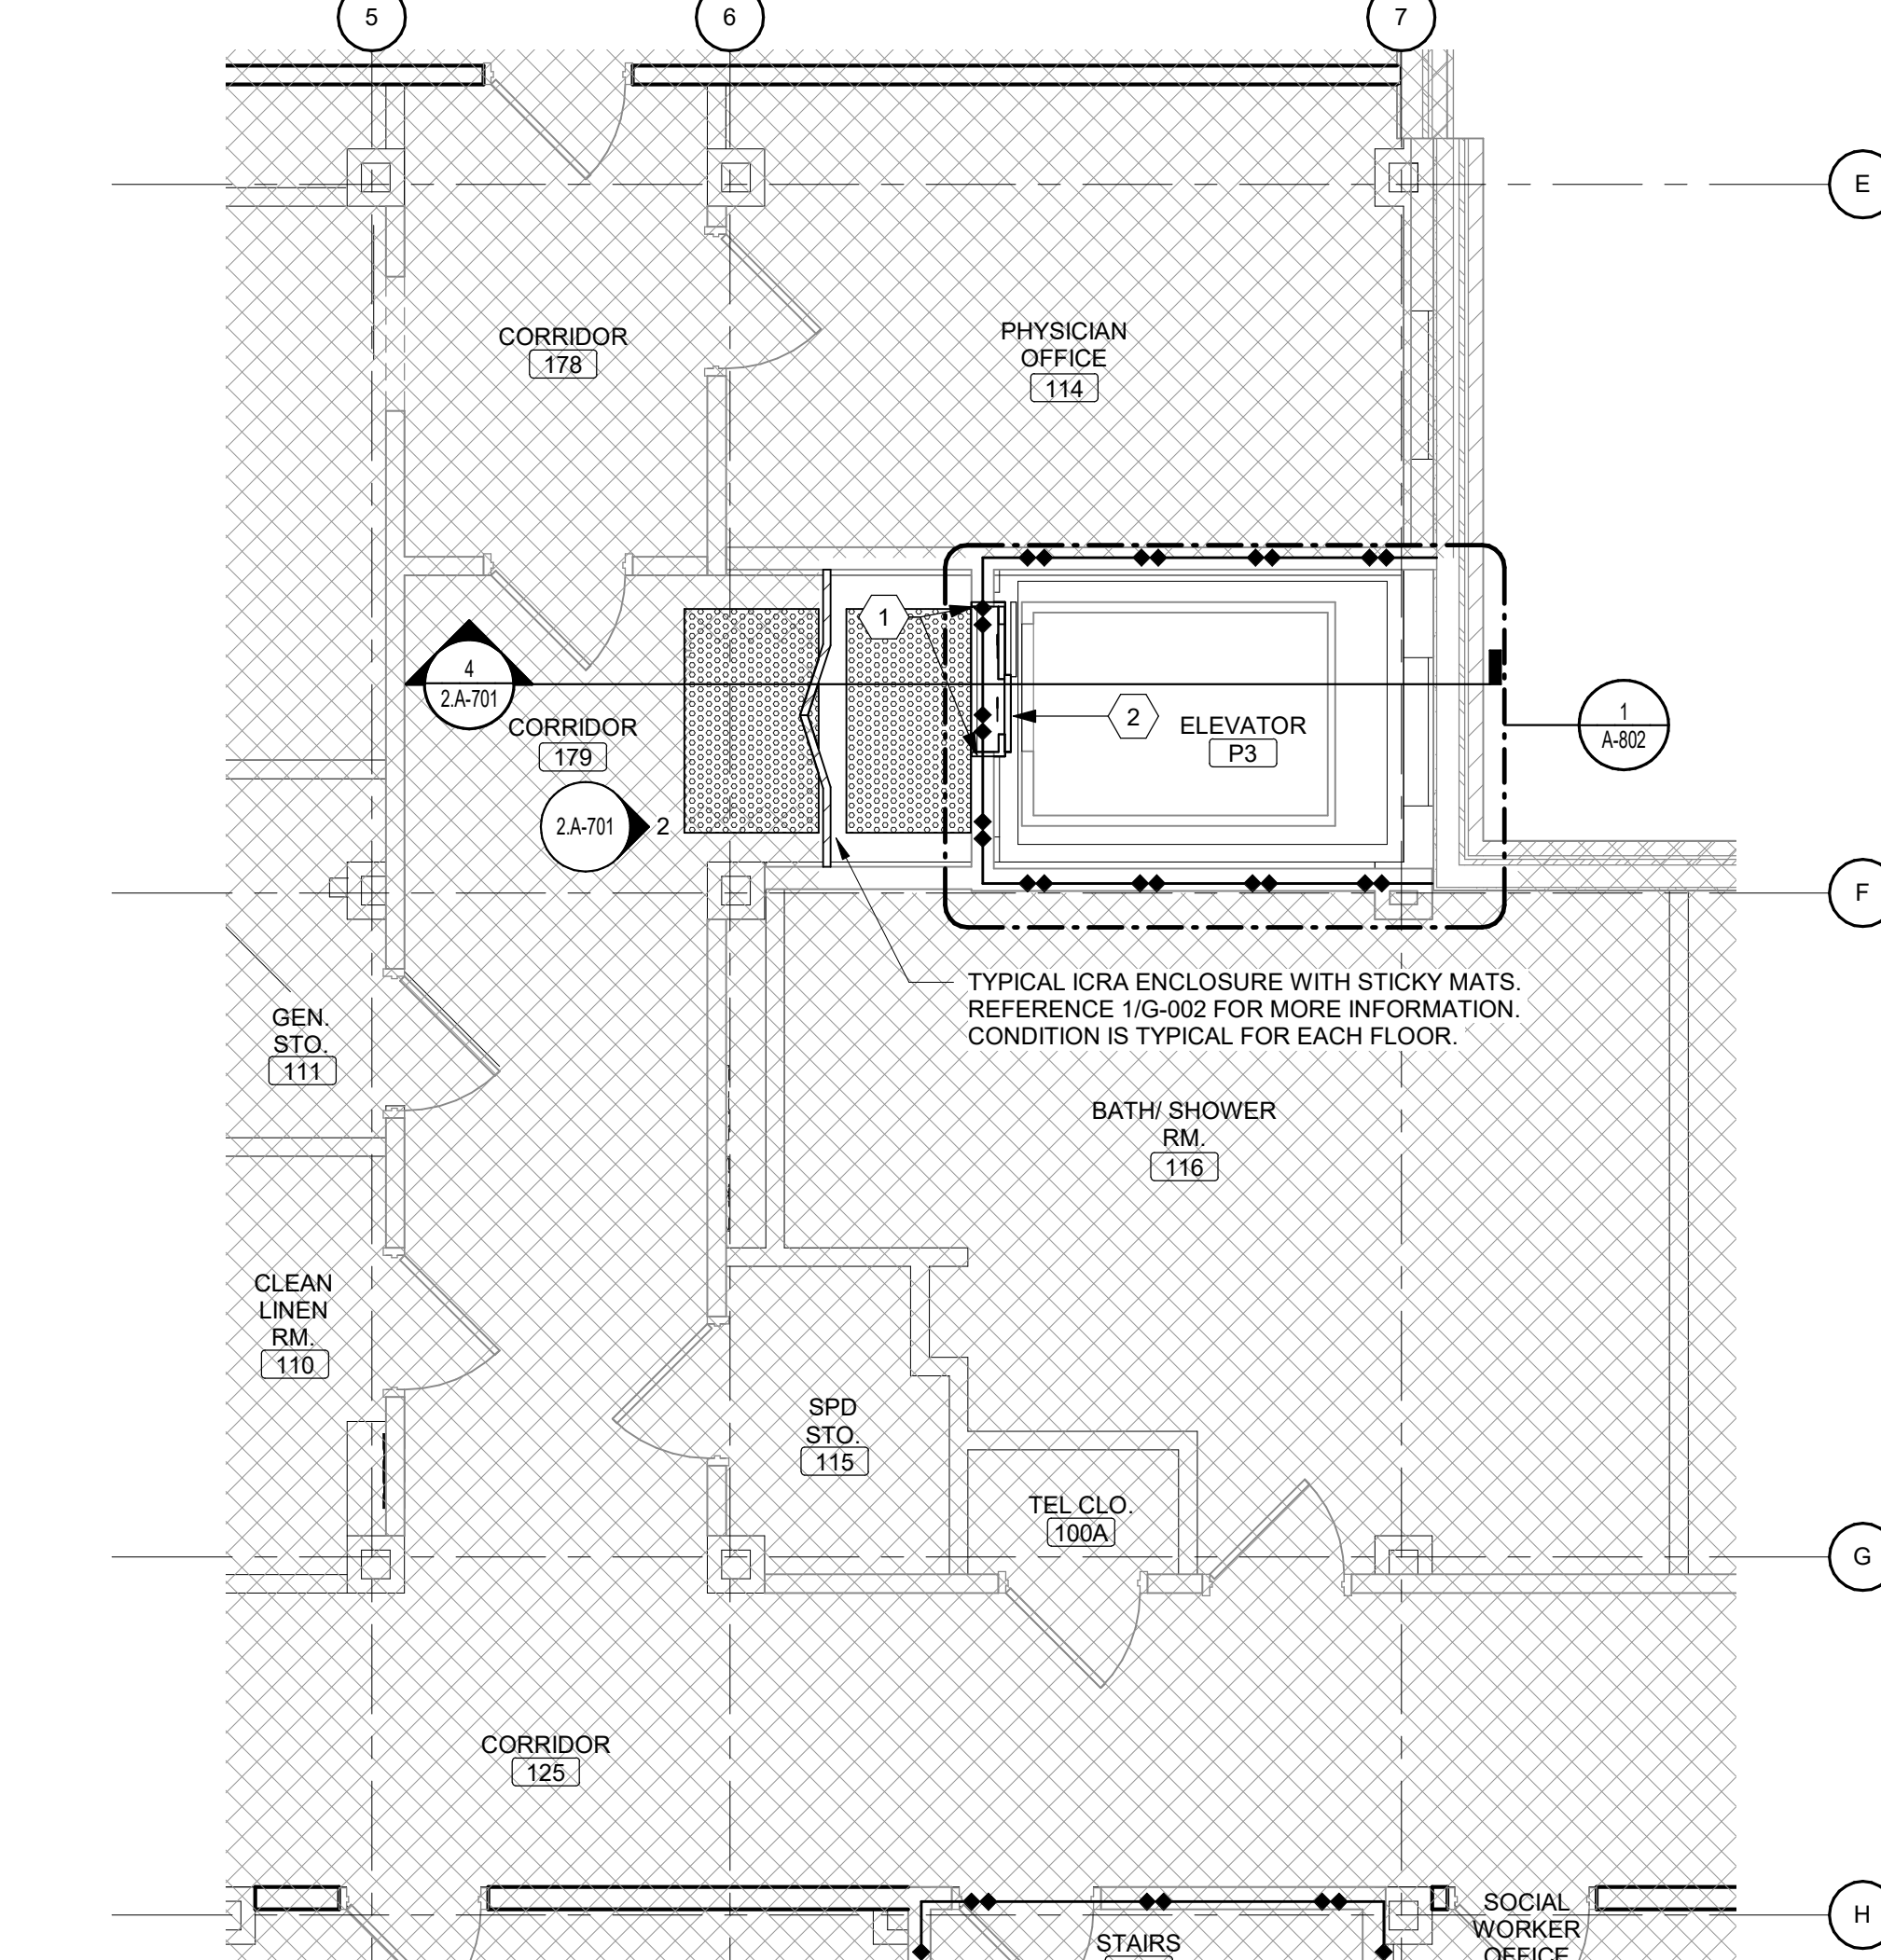

2 BUILDING 2 PARTIAL FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

GENERAL NOTE 1
CONTRACTOR TO COMPLETE WORK ON ONE ELEVATOR PER BUILDING AT A TIME.

SHEET NOTES:

- REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
- REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
- REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
- NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
- NO WORK ON ELEVATOR SYSTEM TO BE COMPLETED PRIOR TO DELIVERY OF ALL COMPONENTS AND EQUIPMENT. ONCE ELEVATOR IS REMOVED FROM SERVICE FOR THE MODERNIZATION, CONTRACTOR TO CONTINUALLY MAN THE ELEVATOR MODERNIZATION WITH QUALIFIED ELEVATOR CREW ON THE NORMAL WORKING DAYS.
- FINAL DESIGN COORDINATION OF LANDING AND STAIRS PENDING REVIEW AND APPROVAL OF VA COR.

KEY NOTES:

- REMOVE SHIPS LADDER
- REMOVE EXISTING FULL HEIGHT GATED FENCE AND GUARDRAIL

KEY NOTES:

- REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- NEW STAINLESS STEEL DOORS
- PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-802
- REMOVE AND REPLACE SUMP PUMP.
- NEW PIT LADDER

LEAD PAINT LOCATIONS

- TAN AND GREEN PAINT ON PLASTER WALL, BUILDING 2, ELEVATOR LOBBY

ICRA LEGEND

- PLASTIC SHEET ICRA BARRIER
- ZIPPER DOOR
- STICKY MATS

DEMOLITION LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- DEMOLISH WALL
- DEMOLISH DOOR

NEW WORK LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- NEW WALL
- NEW DOOR

KEY PLAN
SCALE: NO SCALE
AREA OF WORK

WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS


CONSULTANTS:					PROJECT MANAGER ACG Project Number 21-344 Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511 www.acg-pa.com 919-858-7420		Office of Construction and Facilities Management U.S. Department of Veterans Affairs		Building 2 PARTIAL FLOOR PLANS & INT. ELEV. - P3 Location TUSCALOOSA VAMC		ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137 Approved Date FEBRUARY 6, 2025 Checked DJR Drawn LBB		VA PROJECT NUMBER 679-22-100 Building Number 2 Drawing Number 2.A-100 Dwg 4 of 21	
#	Revisions:	Date			PROJECT MANAGER ACG Project Number 21-344 Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511 www.acg-pa.com 919-858-7420		Office of Construction and Facilities Management U.S. Department of Veterans Affairs		Building 2 PARTIAL FLOOR PLANS & INT. ELEV. - P3 Location TUSCALOOSA VAMC		ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137 Approved Date FEBRUARY 6, 2025 Checked DJR Drawn LBB		VA PROJECT NUMBER 679-22-100 Building Number 2 Drawing Number 2.A-100 Dwg 4 of 21	

SHEET NOTES:


1. REFER TO SHEET A-001 FOR PARTITION TYPES AND DETAILS.
2. REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
3. REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
4. REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
5. THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
6. NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
7. CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. EQUIPMENT BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO EXISTING.

 KEY NOTES:


- 1 REFINISH EXISTING STAINLESS STEEL
ENTRANCE FRAME AT HEAD AND BOTH
JAMBS.
- 2 NEW STAINLESS STEEL HOISTWAY DOORS
- 3 NEW CALL BUTTONS, EXISTING BACK BOXES
TO REMAIN.
- 4 NEW HALL LANTERN, EXISTING BACK BOXES
TO REMAIN.
- 5 PROVIDE NEW ELEVATOR INTERIOR
FINISHES, CONTROL PANELS, ETC. FOR
COMPLETE INSTALLATION, SEE A-802.
- 6 NEW EMERGENCY ACCESS PANEL
- 7 NEW PIT LADDER
- 8 REMOVE AND REPLACE ELEVATOR MOTOR.
- 9 REMOVE AND REPLACE ELEVATOR
CONTROLLER.

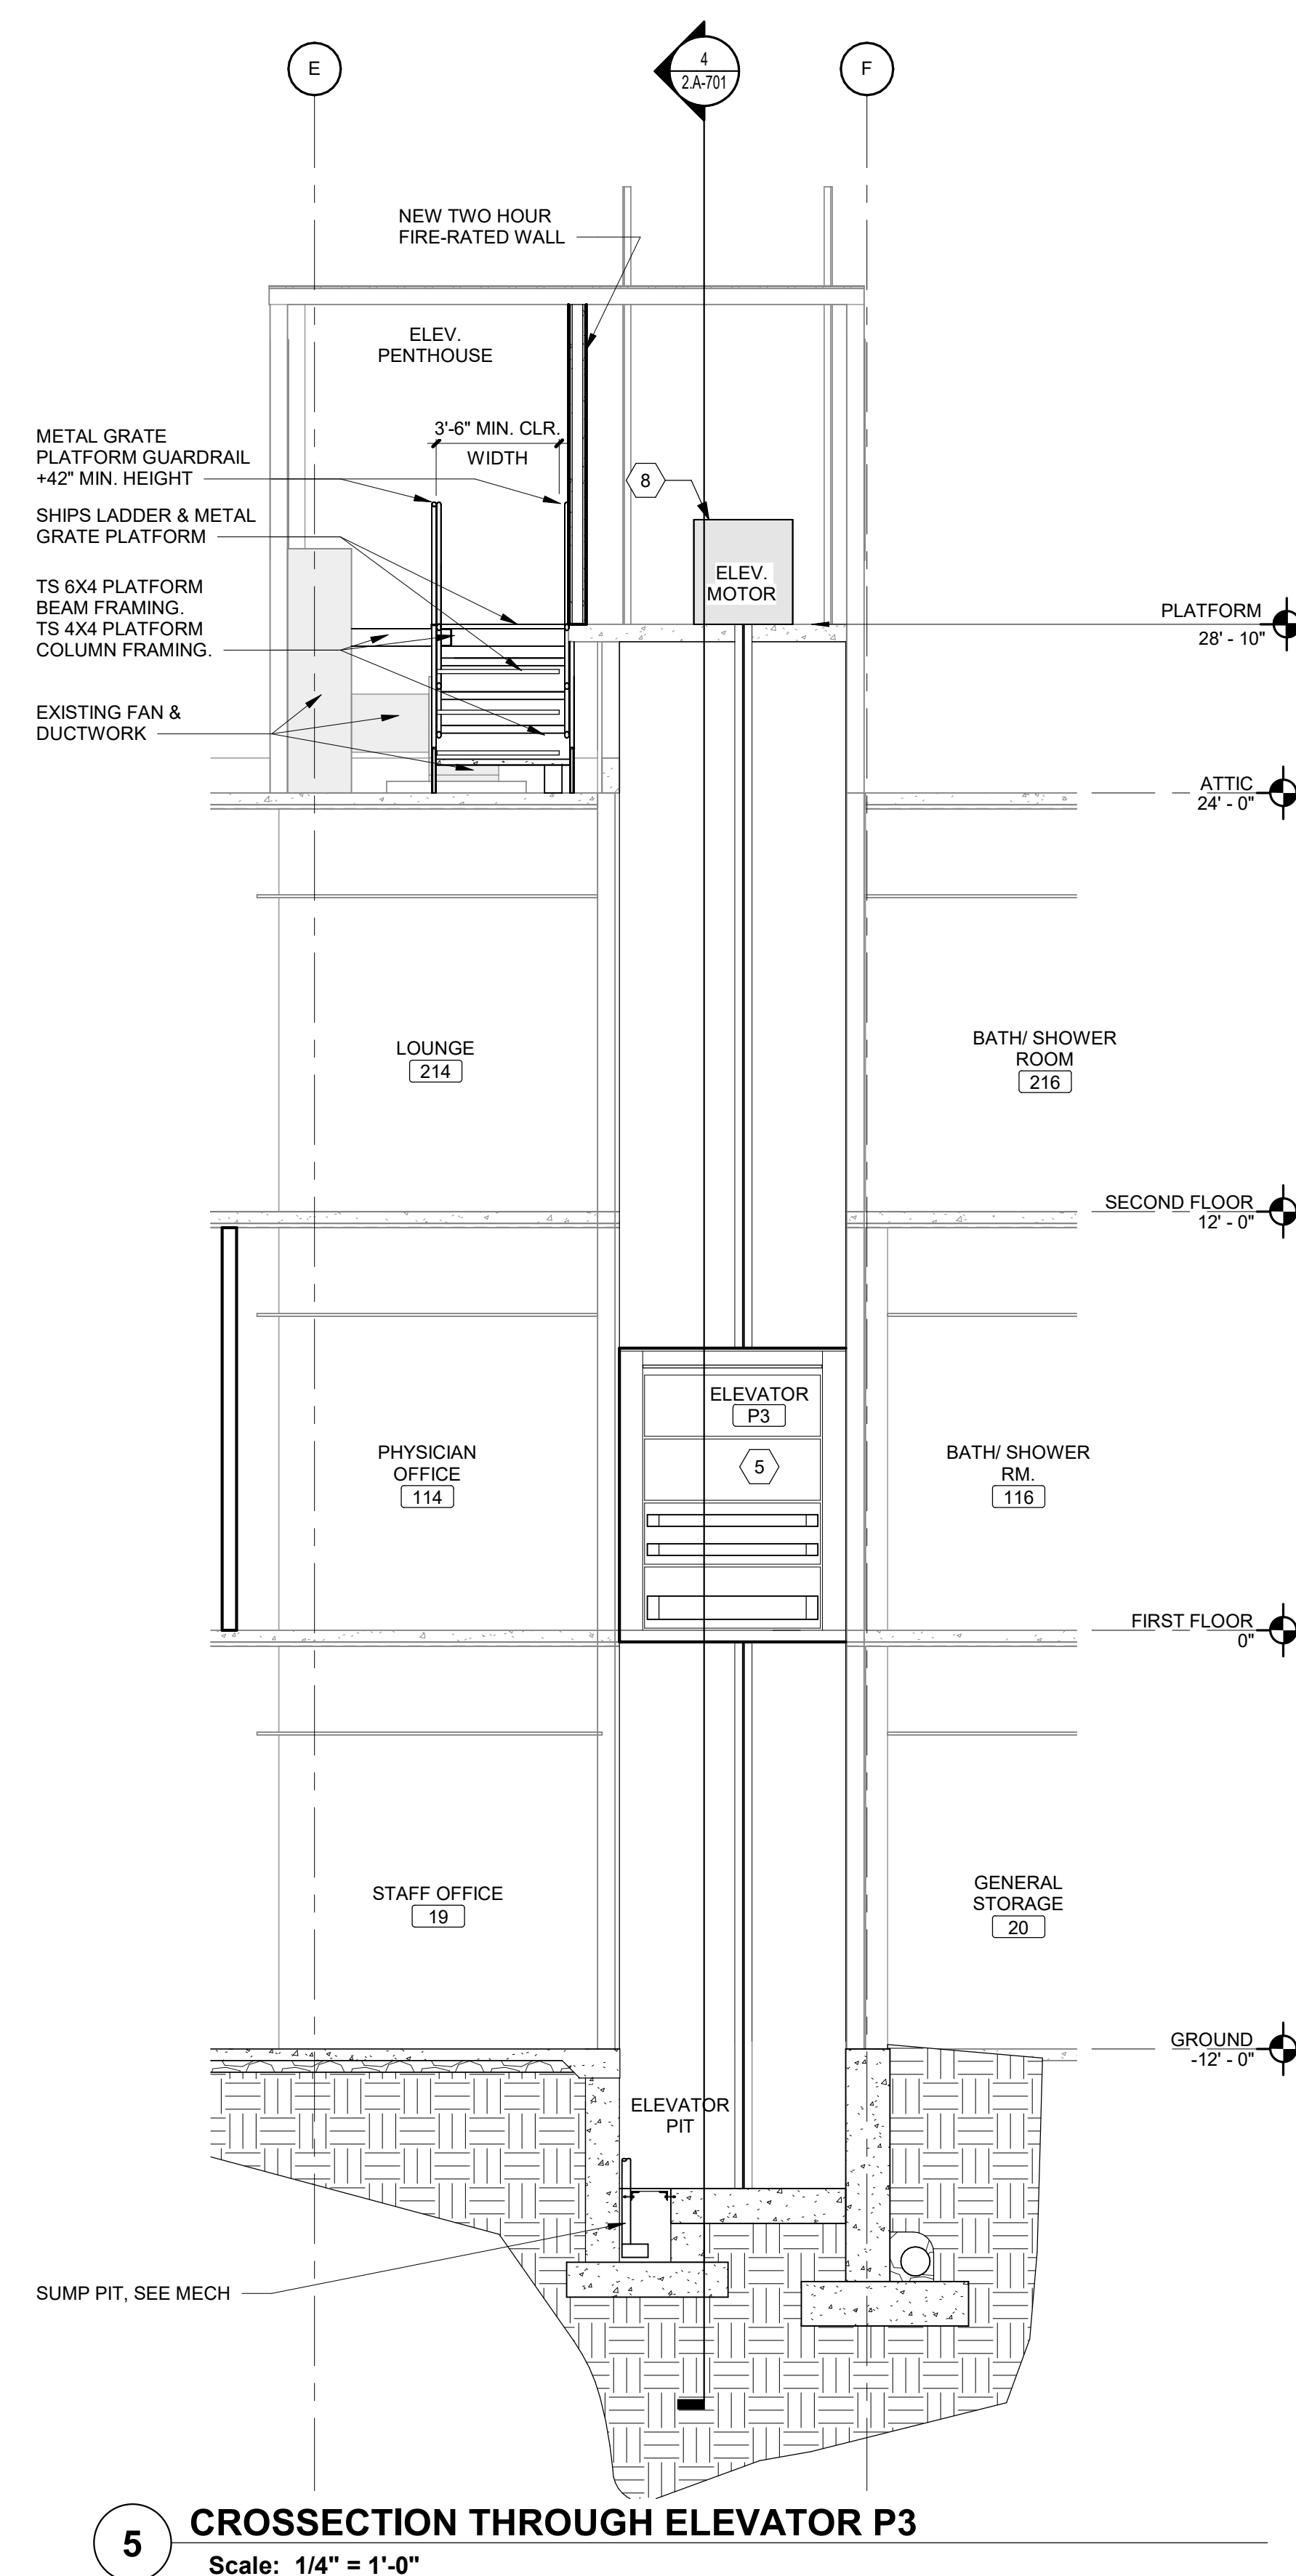


5 CROSSECTION THROUGH ELEVATOR P3
Scale: 1/4" = 1'-0"

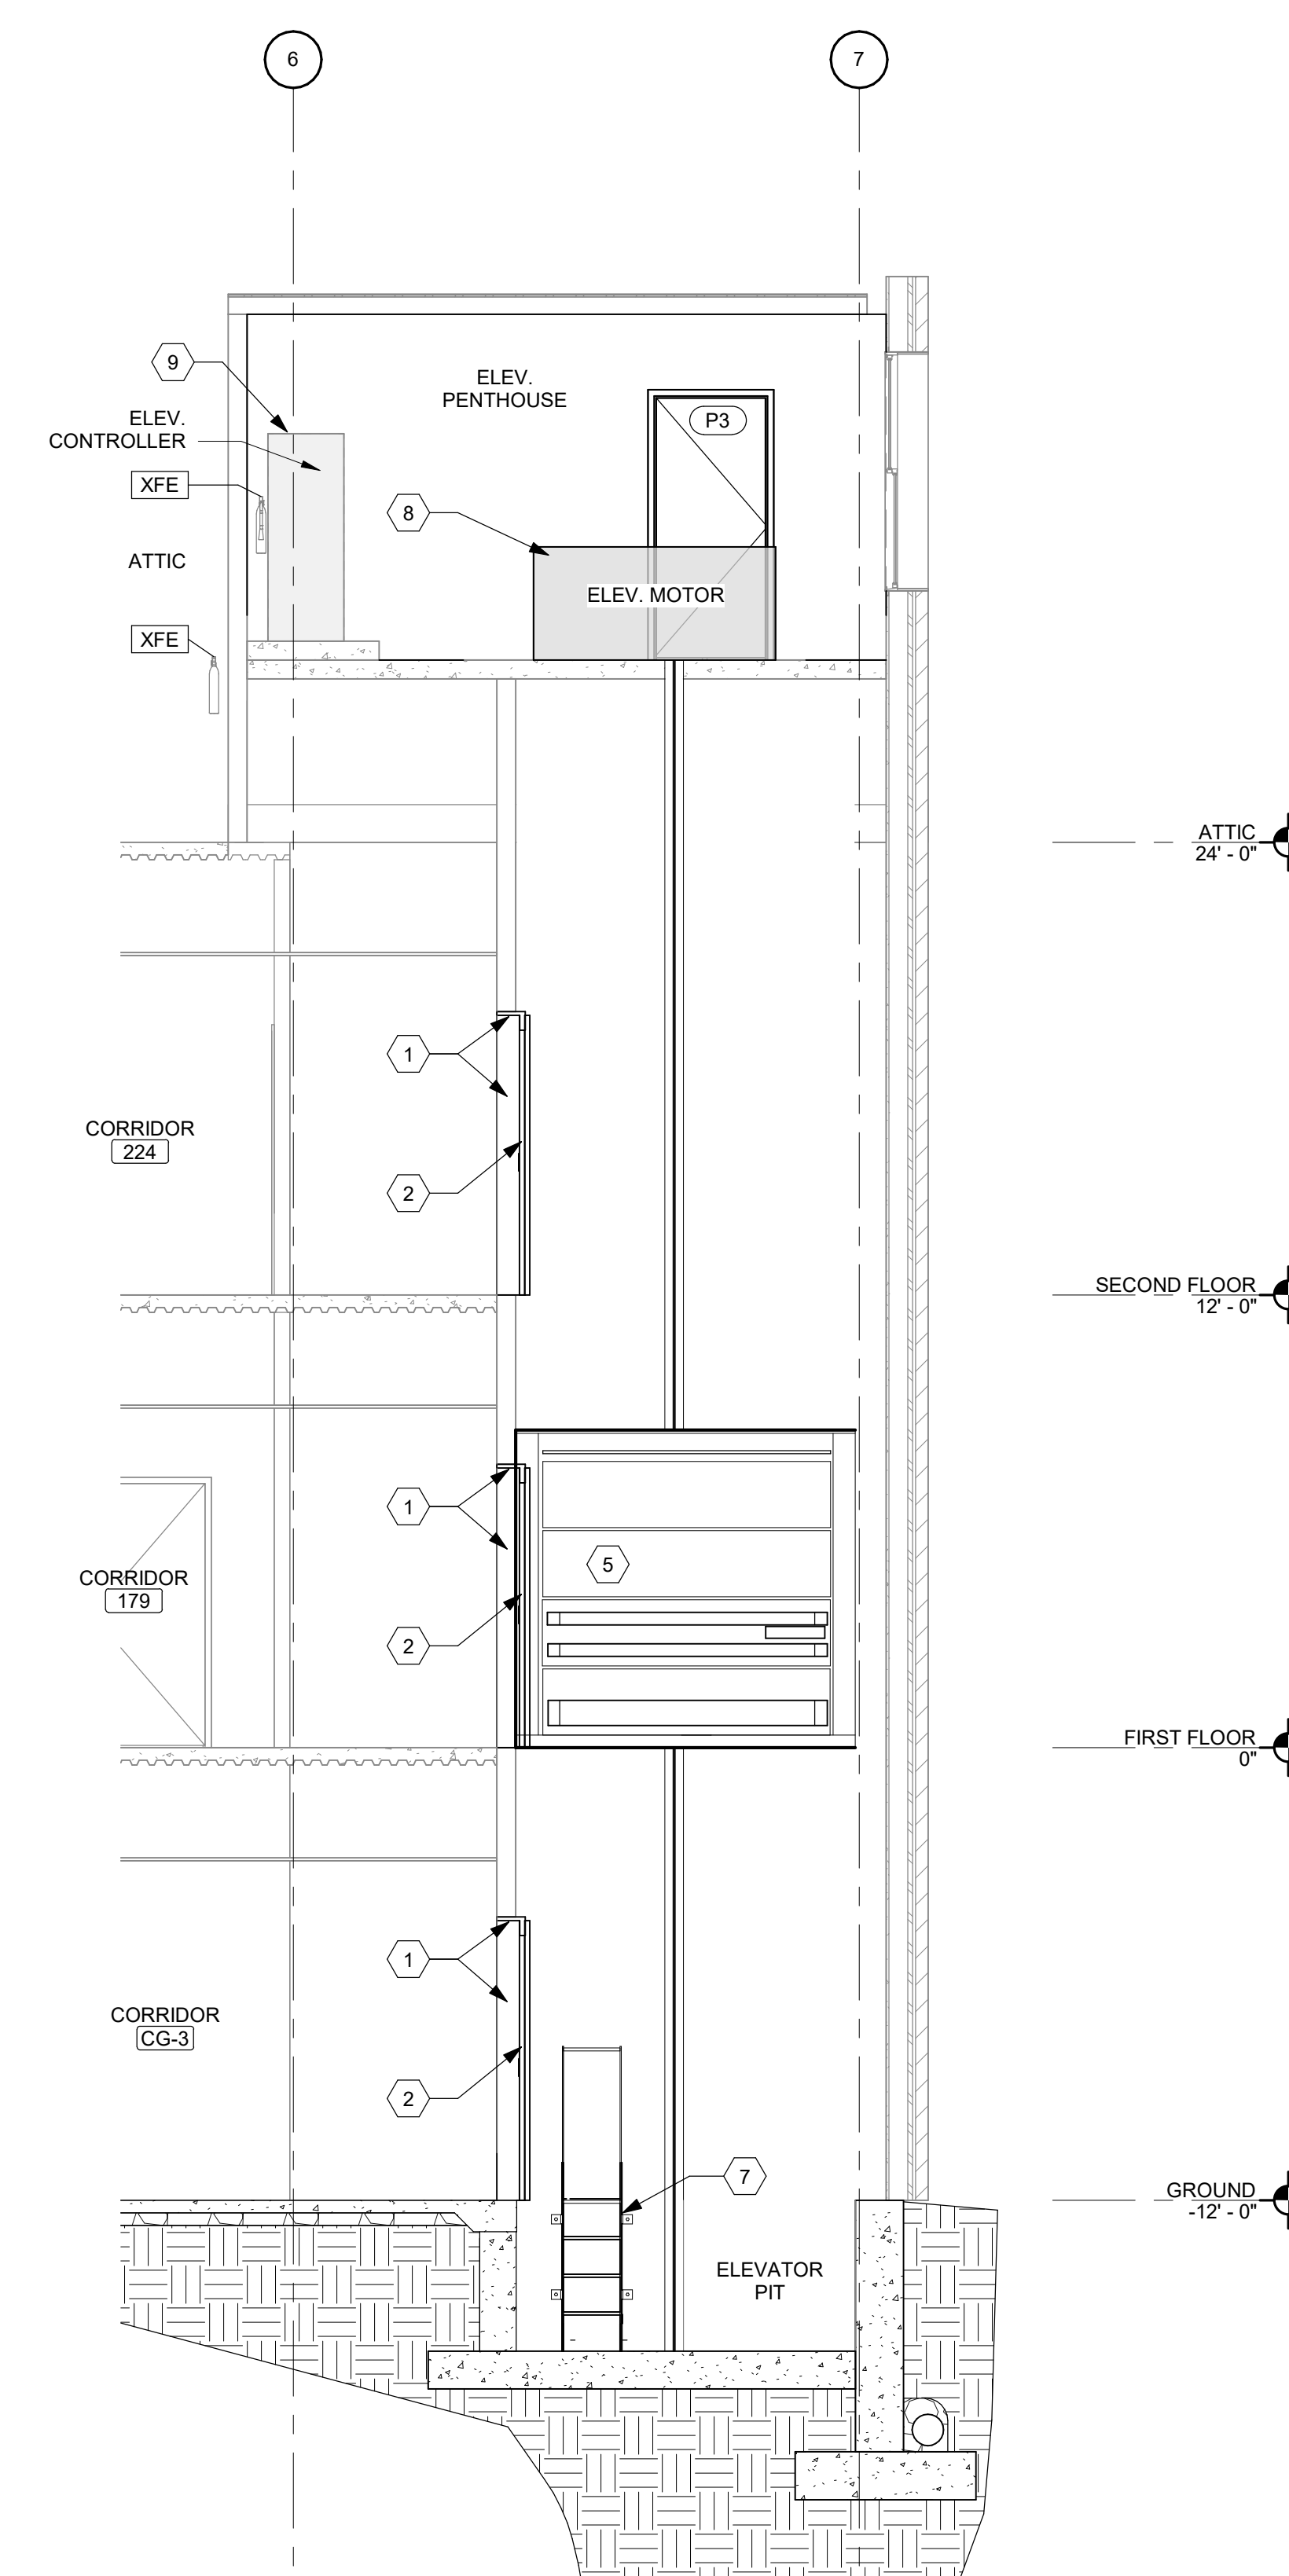


4 SECTION THROUGH ELEVATOR P3
Scale: 1/4" = 1'-0"

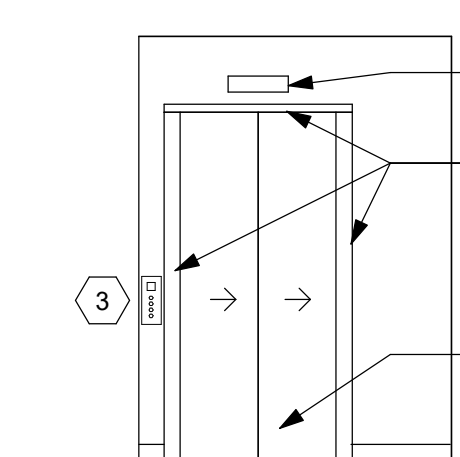

1 ELEVATOR @ BLDG. 2 SECOND FLOOR - P3
Scale: 1/4" = 1'-0"

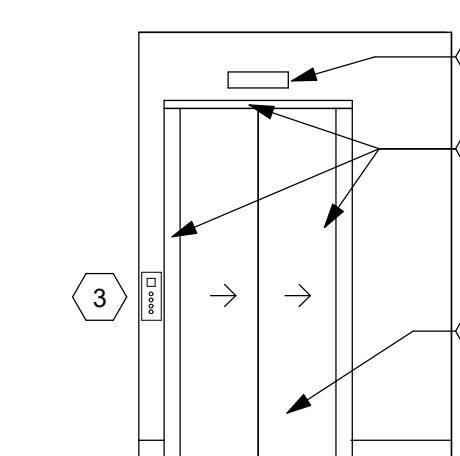


2 ELEVATOR @ BLDG. 2 FIRST FLOOR - P3
Scale: 1/4" = 1'-0"

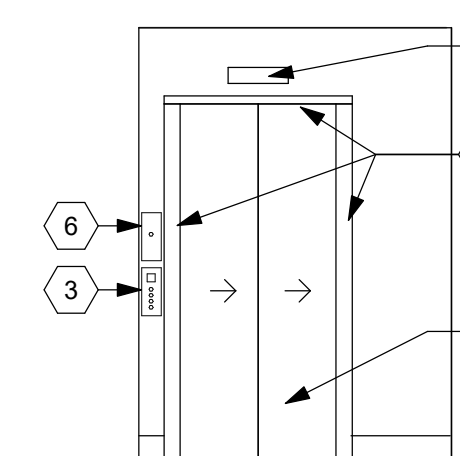


3 ELEVATOR @ BLDG. 2 GROUND FLOOR - P3
Scale: 1/4" = 1'-0"

FULLY SPRINKLERED
100% BID DOCUMENTS


[illegible]

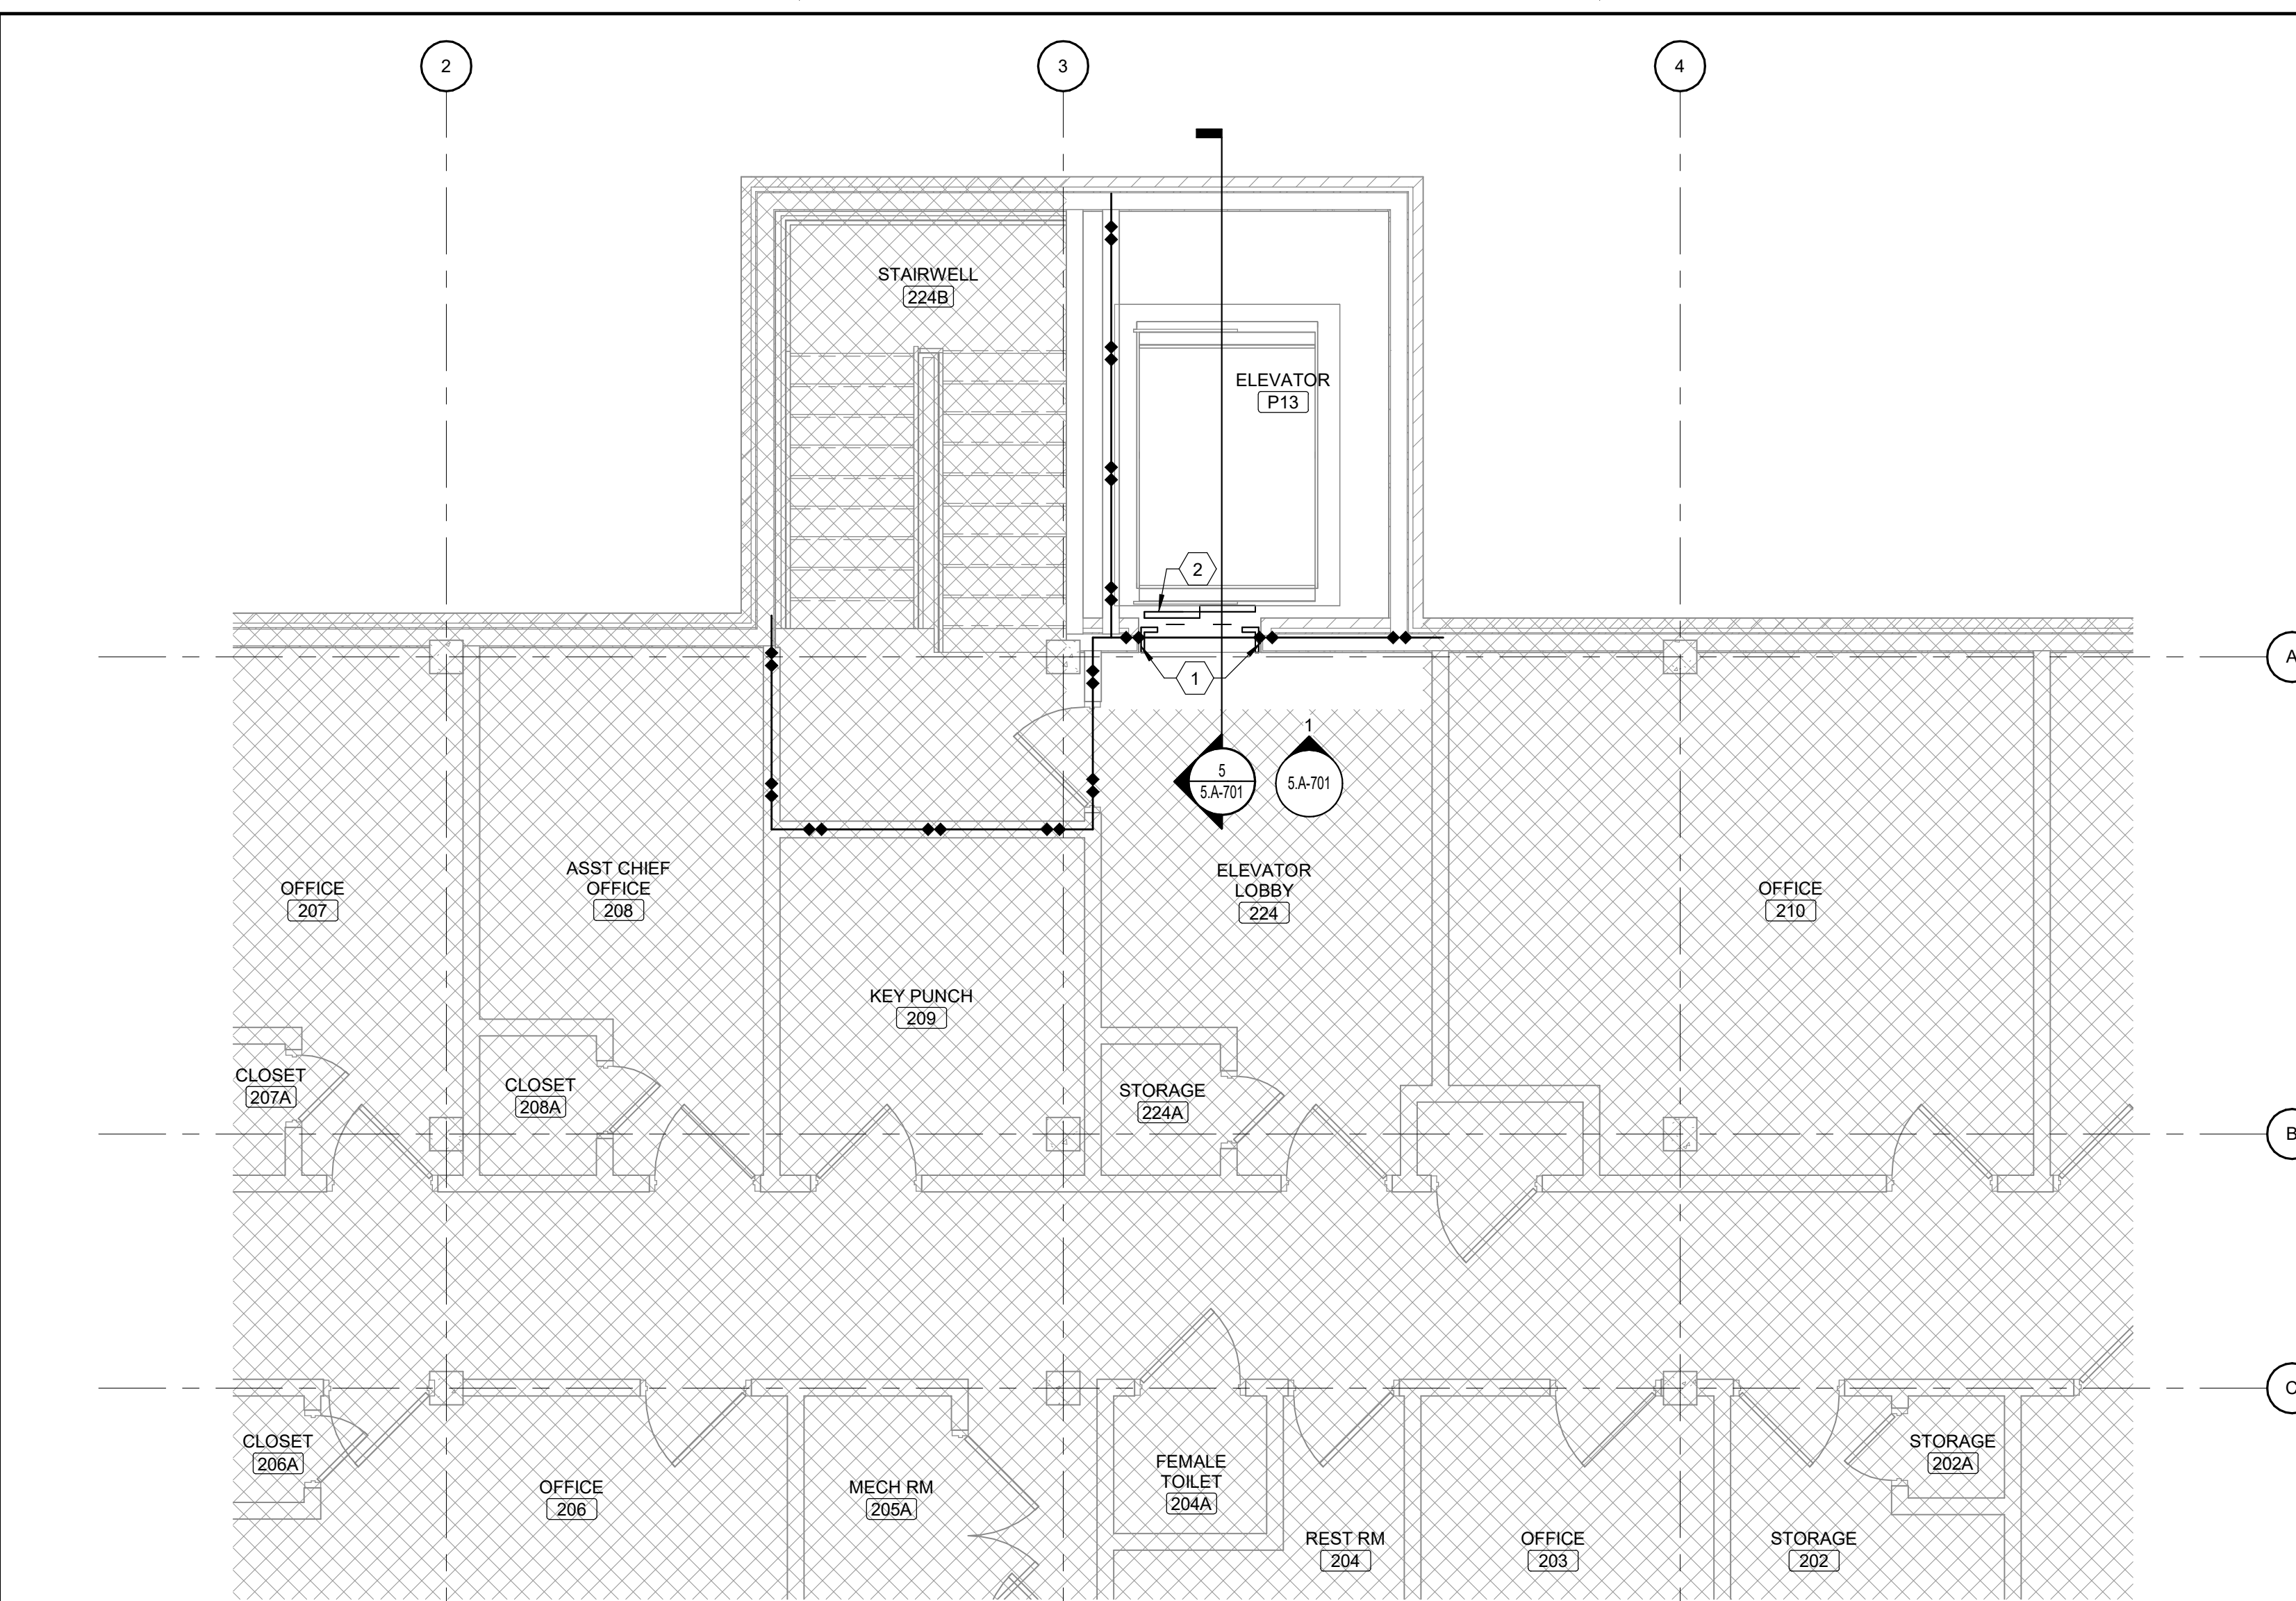

3 BUILDING 5 PARTIAL SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"

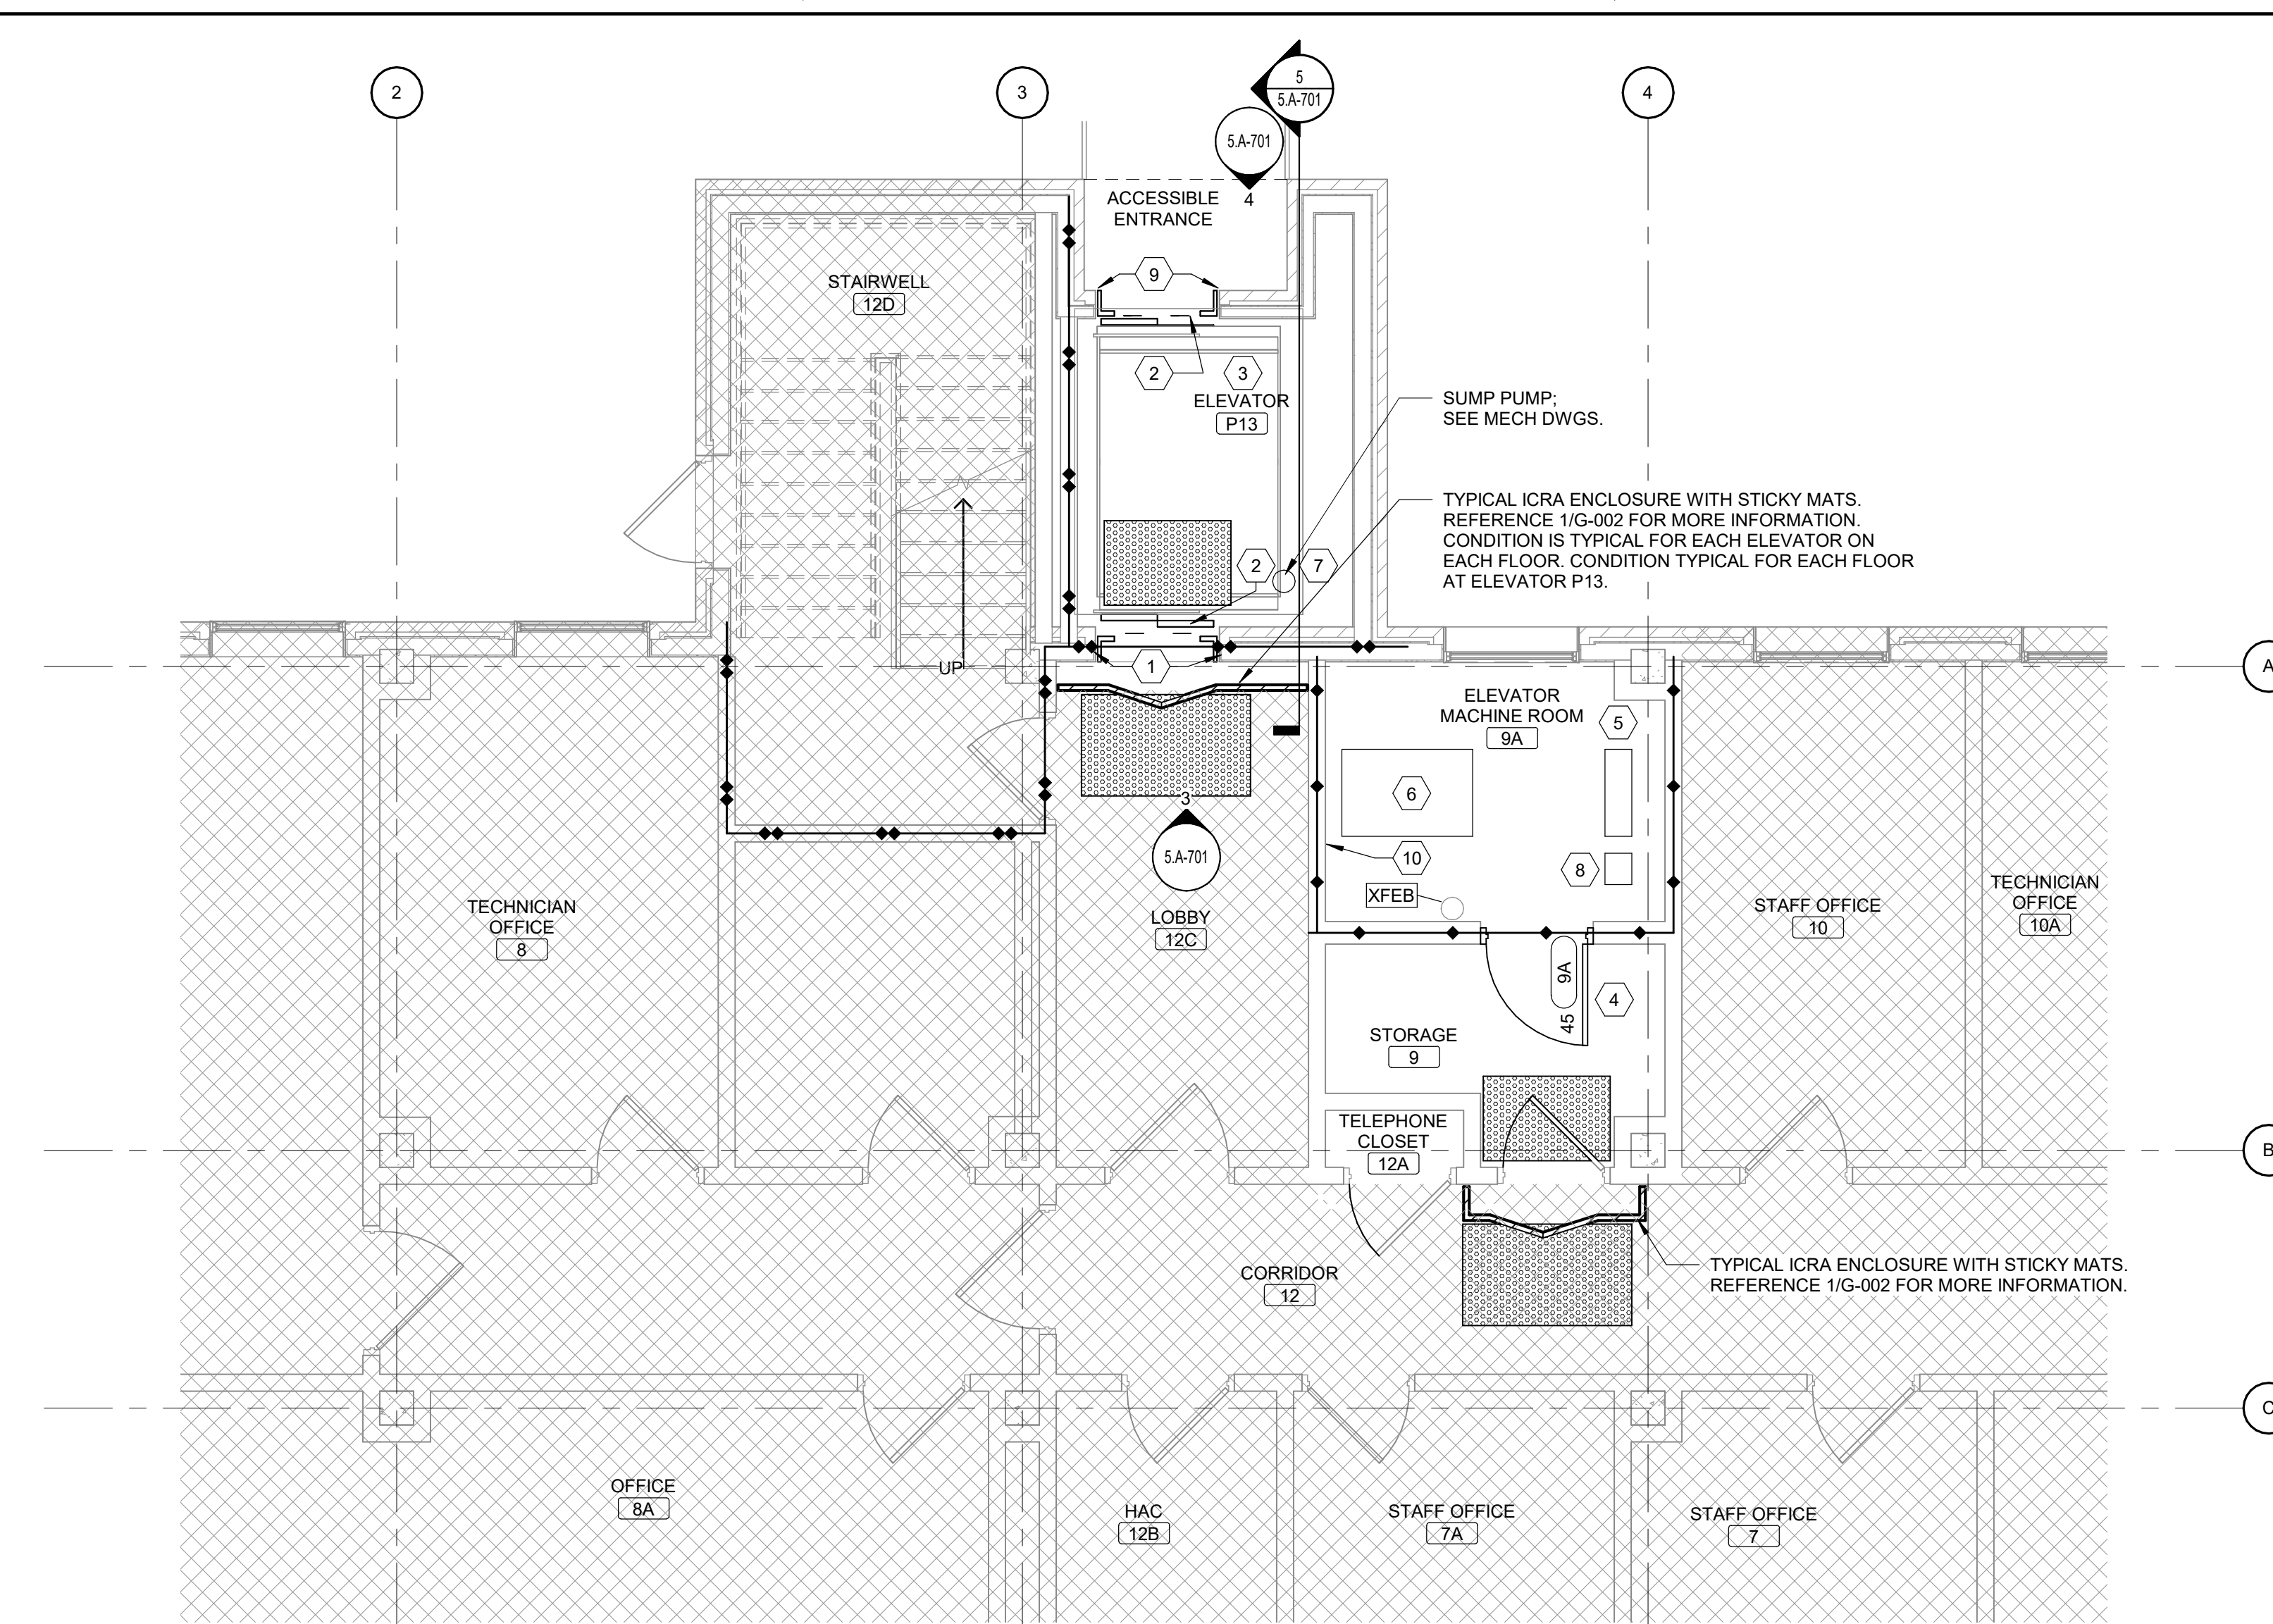

1 BUILDING 5 PARTIAL BASEMENT FLOOR PLAN
Scale: 1/4" = 1'-0"

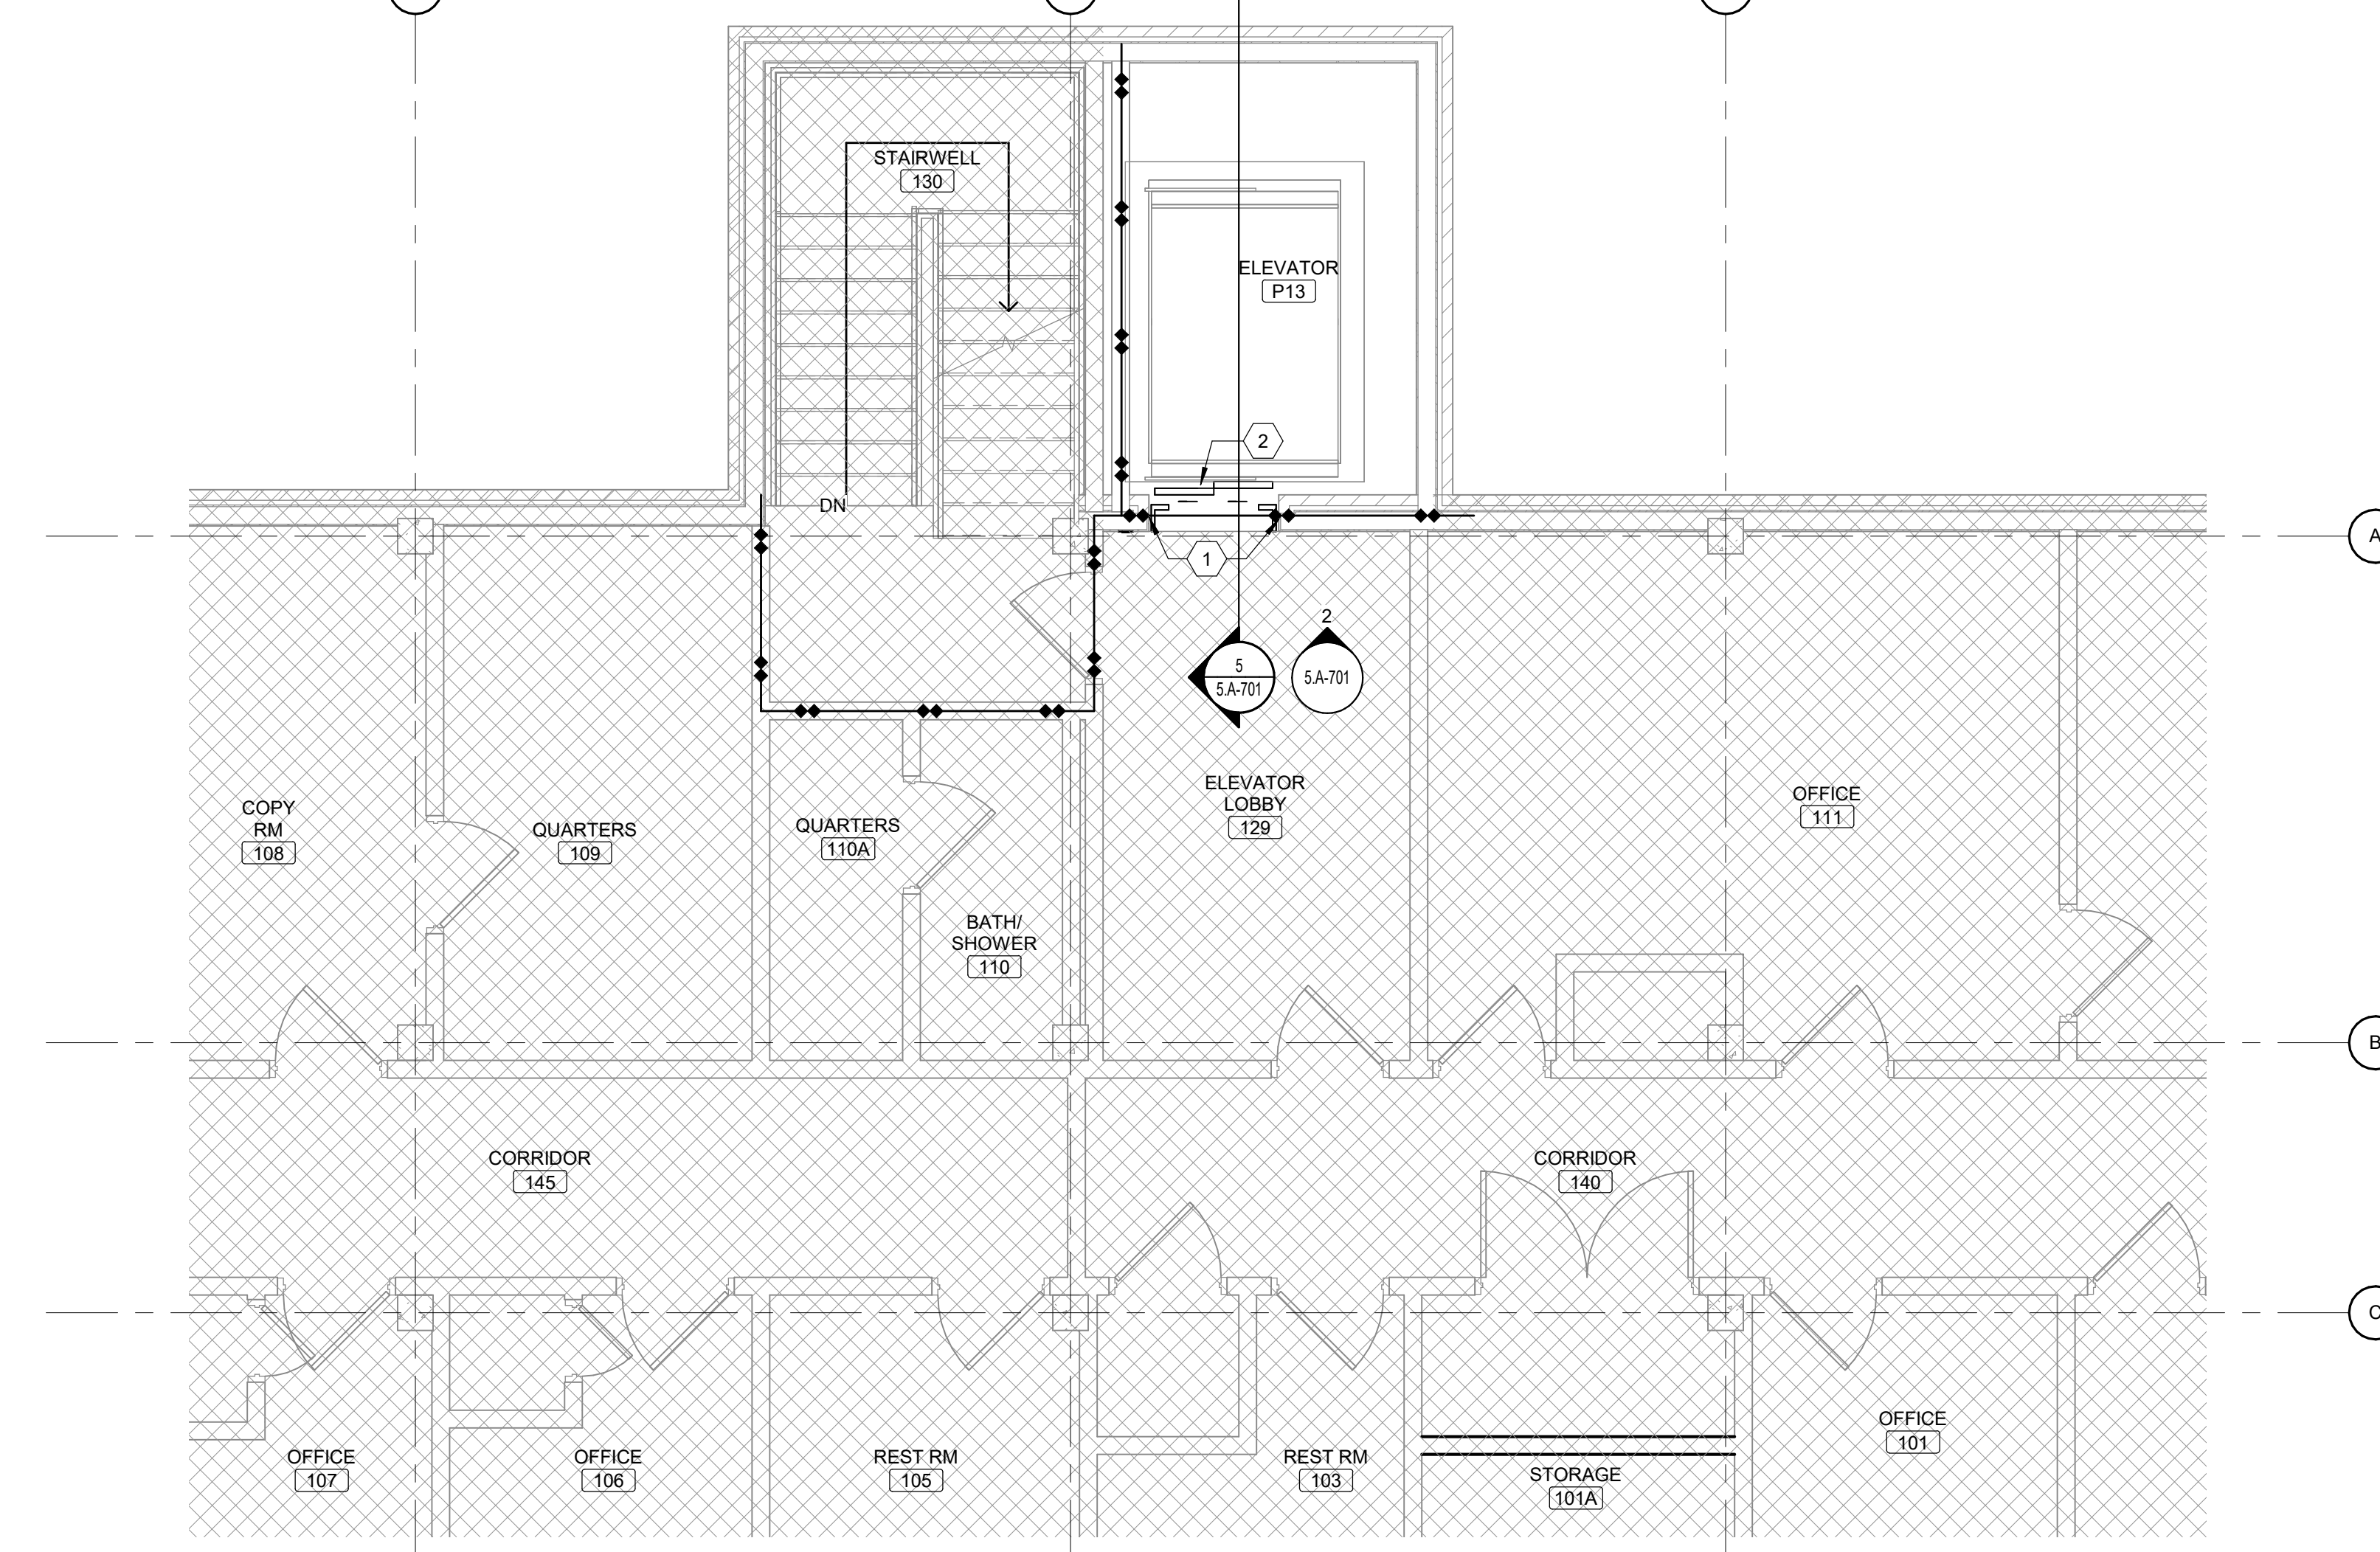

2 BUILDING 5 PARTIAL FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

- REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
- REFER TO SHEET A-801 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
- REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
- NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
- NO WORK ON ELEVATOR SYSTEM TO BE COMPLETED PRIOR TO DELIVERY OF ALL COMPONENTS AND EQUIPMENT. ONCE ELEVATOR IS REMOVED FROM SERVICE FOR THE MODERNIZATION, CONTRACTOR TO CONTINUALLY MAN THE ELEVATOR MODERNIZATION WITH QUALIFIED ELEVATOR CREW ON THE NORMAL WORKING DAYS.

KEY NOTES:

- REPLACE STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- REMOVE AND REPLACE STAINLESS STEEL HOISTWAY DOORS.
- PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-803.
- DOOR AND FRAME TO BE REPLACED WITH 60 MINUTE FIRE RATED DOOR AND FRAME.
- REMOVE AND REPLACE CONTROLLER.
- REMOVE AND REPLACE HYDRAULIC POWER UNIT.
- REMOVE AND REPLACE SUMP PUMP.
- REMOVE ACM FLOORING.
- EXTERIOR FRAME TO REMAIN AND TO BE REPAINTED.
- PATCH AND REPAIR WALL TO MATCH EXISTING FROM GRILLE REMOVAL.

LEAD PAINT LOCATIONS

- TAN PAINT ON METAL DOOR FRAME, BUILDING 5 - ENTRANCE TO ROOM 8A.
- GREEN PAINT ON CONCRETE WALLS, BUILDING 5 - ROOM 8A.
- GRAY PAINT ON METAL HYDRAULIC BOX, BUILDING 5 - ROOM 8A.

ICRA LEGEND

- PLASTIC SHEET ICRA BARRIER
- ZIPPER DOOR
- STICKY MATS

NEW WORK LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- NEW WALL
- NEW DOOR
- NEW WINDOW
- NOT IN PROJECT SCOPE

KEY PLAN
SCALE: NO SCALE

AREA OF WORK

WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

**FULLY SPRINKLERED
100% BID DOCUMENTS**


CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title BUILDING 5 PARTIAL FLOOR PLANS - P13		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
			Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC		Approved		Building Number 5	
			www.acg-pa.com		919-858-7420				Date FEBRUARY 6, 2025		Checked DJR	
									Drawn LBB		Drawing Number 5.A-100	
											Dwg 6 of 21	

SHEET NOTES:


- REFER TO SHEET A-001 FOR PARTITION WALL TYPES AND DETAILS.
- REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
- REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
- REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
- NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
- CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. EQUIPMENT BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.

KEY NOTES:


- REPLACE STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- NEW STAINLESS STEEL HOISTWAY DOORS.
- PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-803.
- NEW HALL LANTERN. EXISTING BACK BOXES TO REMAIN.
- NEW CALL BUTTONS. EXISTING BACK BOXES TO REMAIN.
- NEW EMERGENCY ACCESS PANEL.
- EXISTING SIGNAGE TO REMAIN.
- REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.

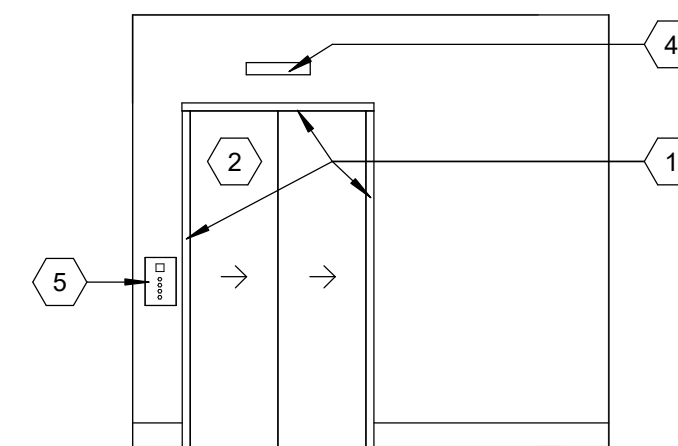


1 ELEVATOR @ SECOND FLOOR - BLDG 5 - P13 - INT
Scale: 1/4" = 1'-0"

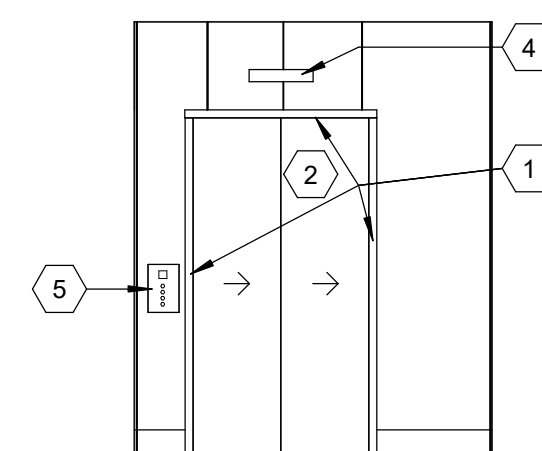


2 ELEVATOR @ FIRST FLOOR - BLDG 5 - P13 - INT
Scale: 1/4" = 1'-0"

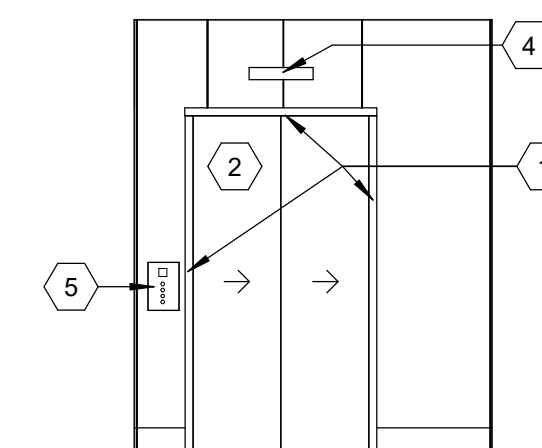

3 ELEVATOR @ BASEMENT - BLDG 5 - P13 - INT
Scale: 1/4" = 1'-0"

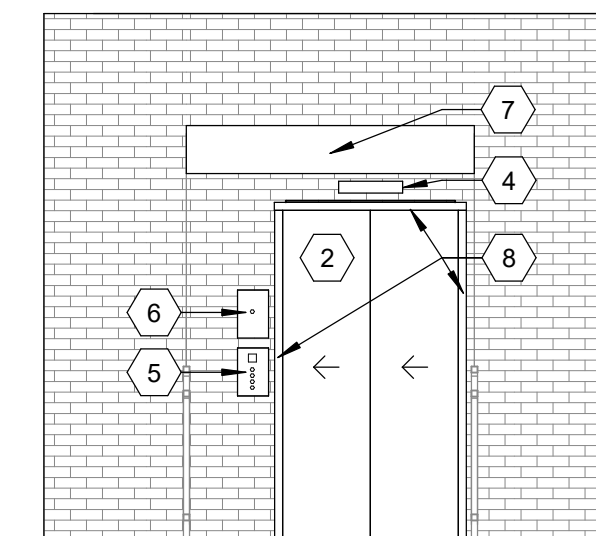


4 ELEVATOR @ BASEMENT - BLDG 5 - P13 - EXT
Scale: 1/4" = 1'-0"

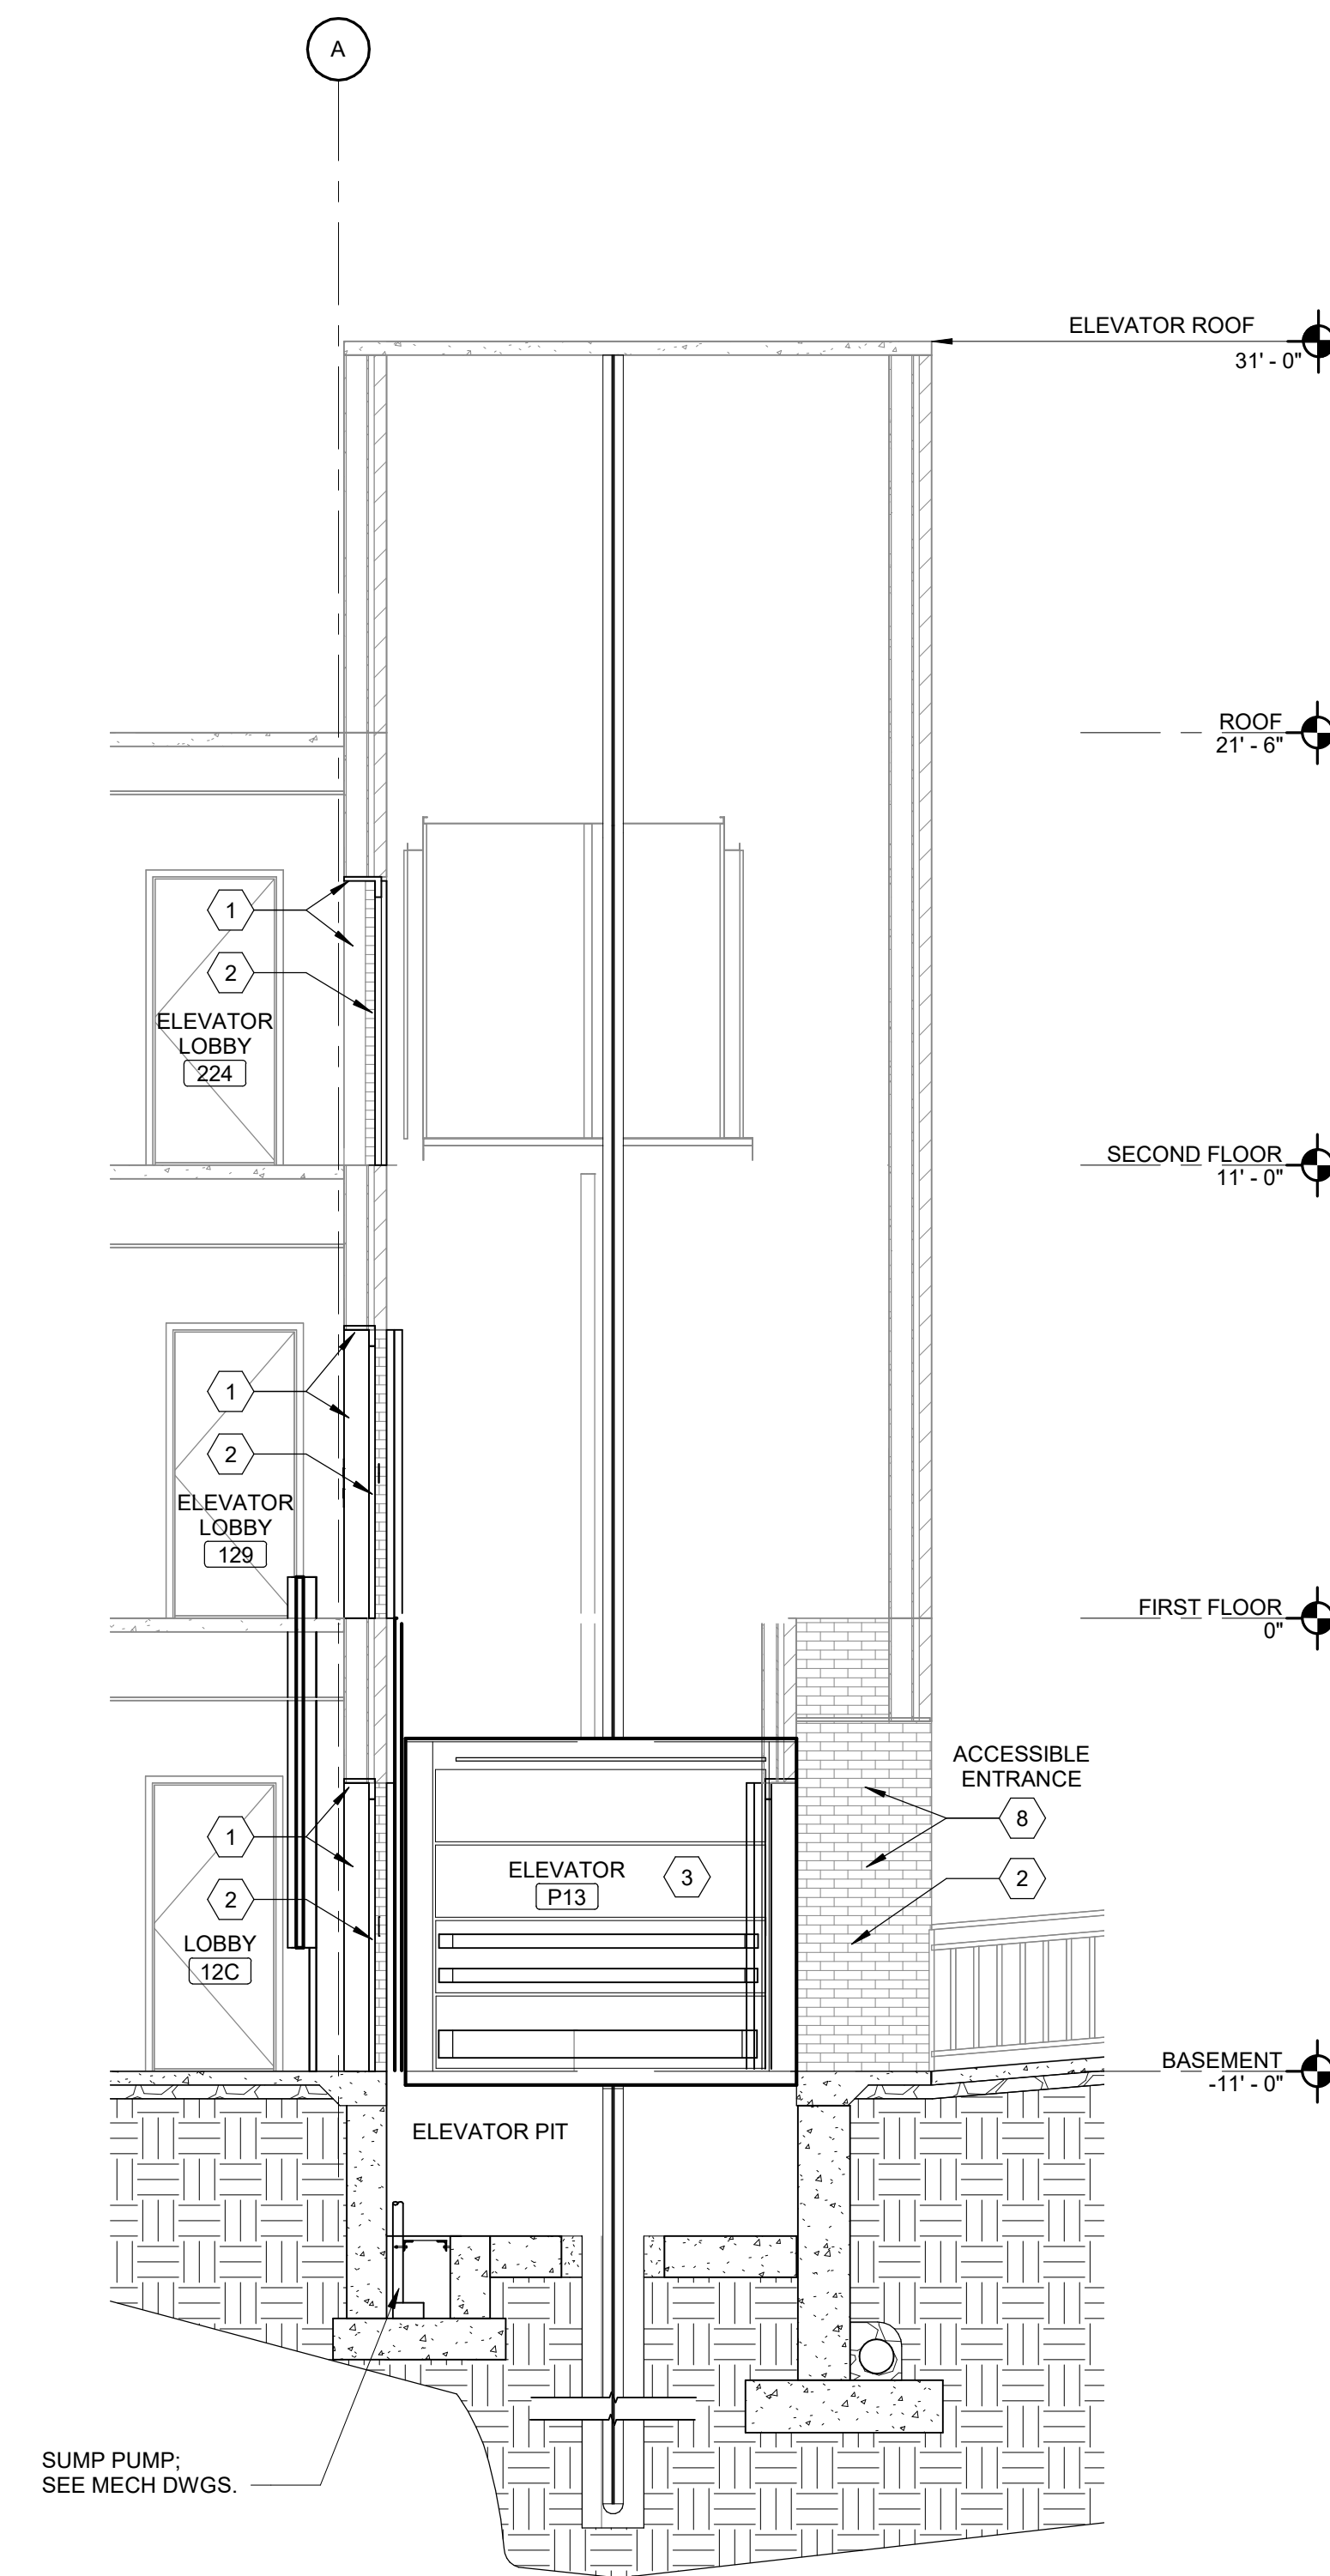


5 SECTION THROUGH P13
Scale: 1/4" = 1'-0"

FULLY SPRINKLERED
100% BID DOCUMENTS


																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

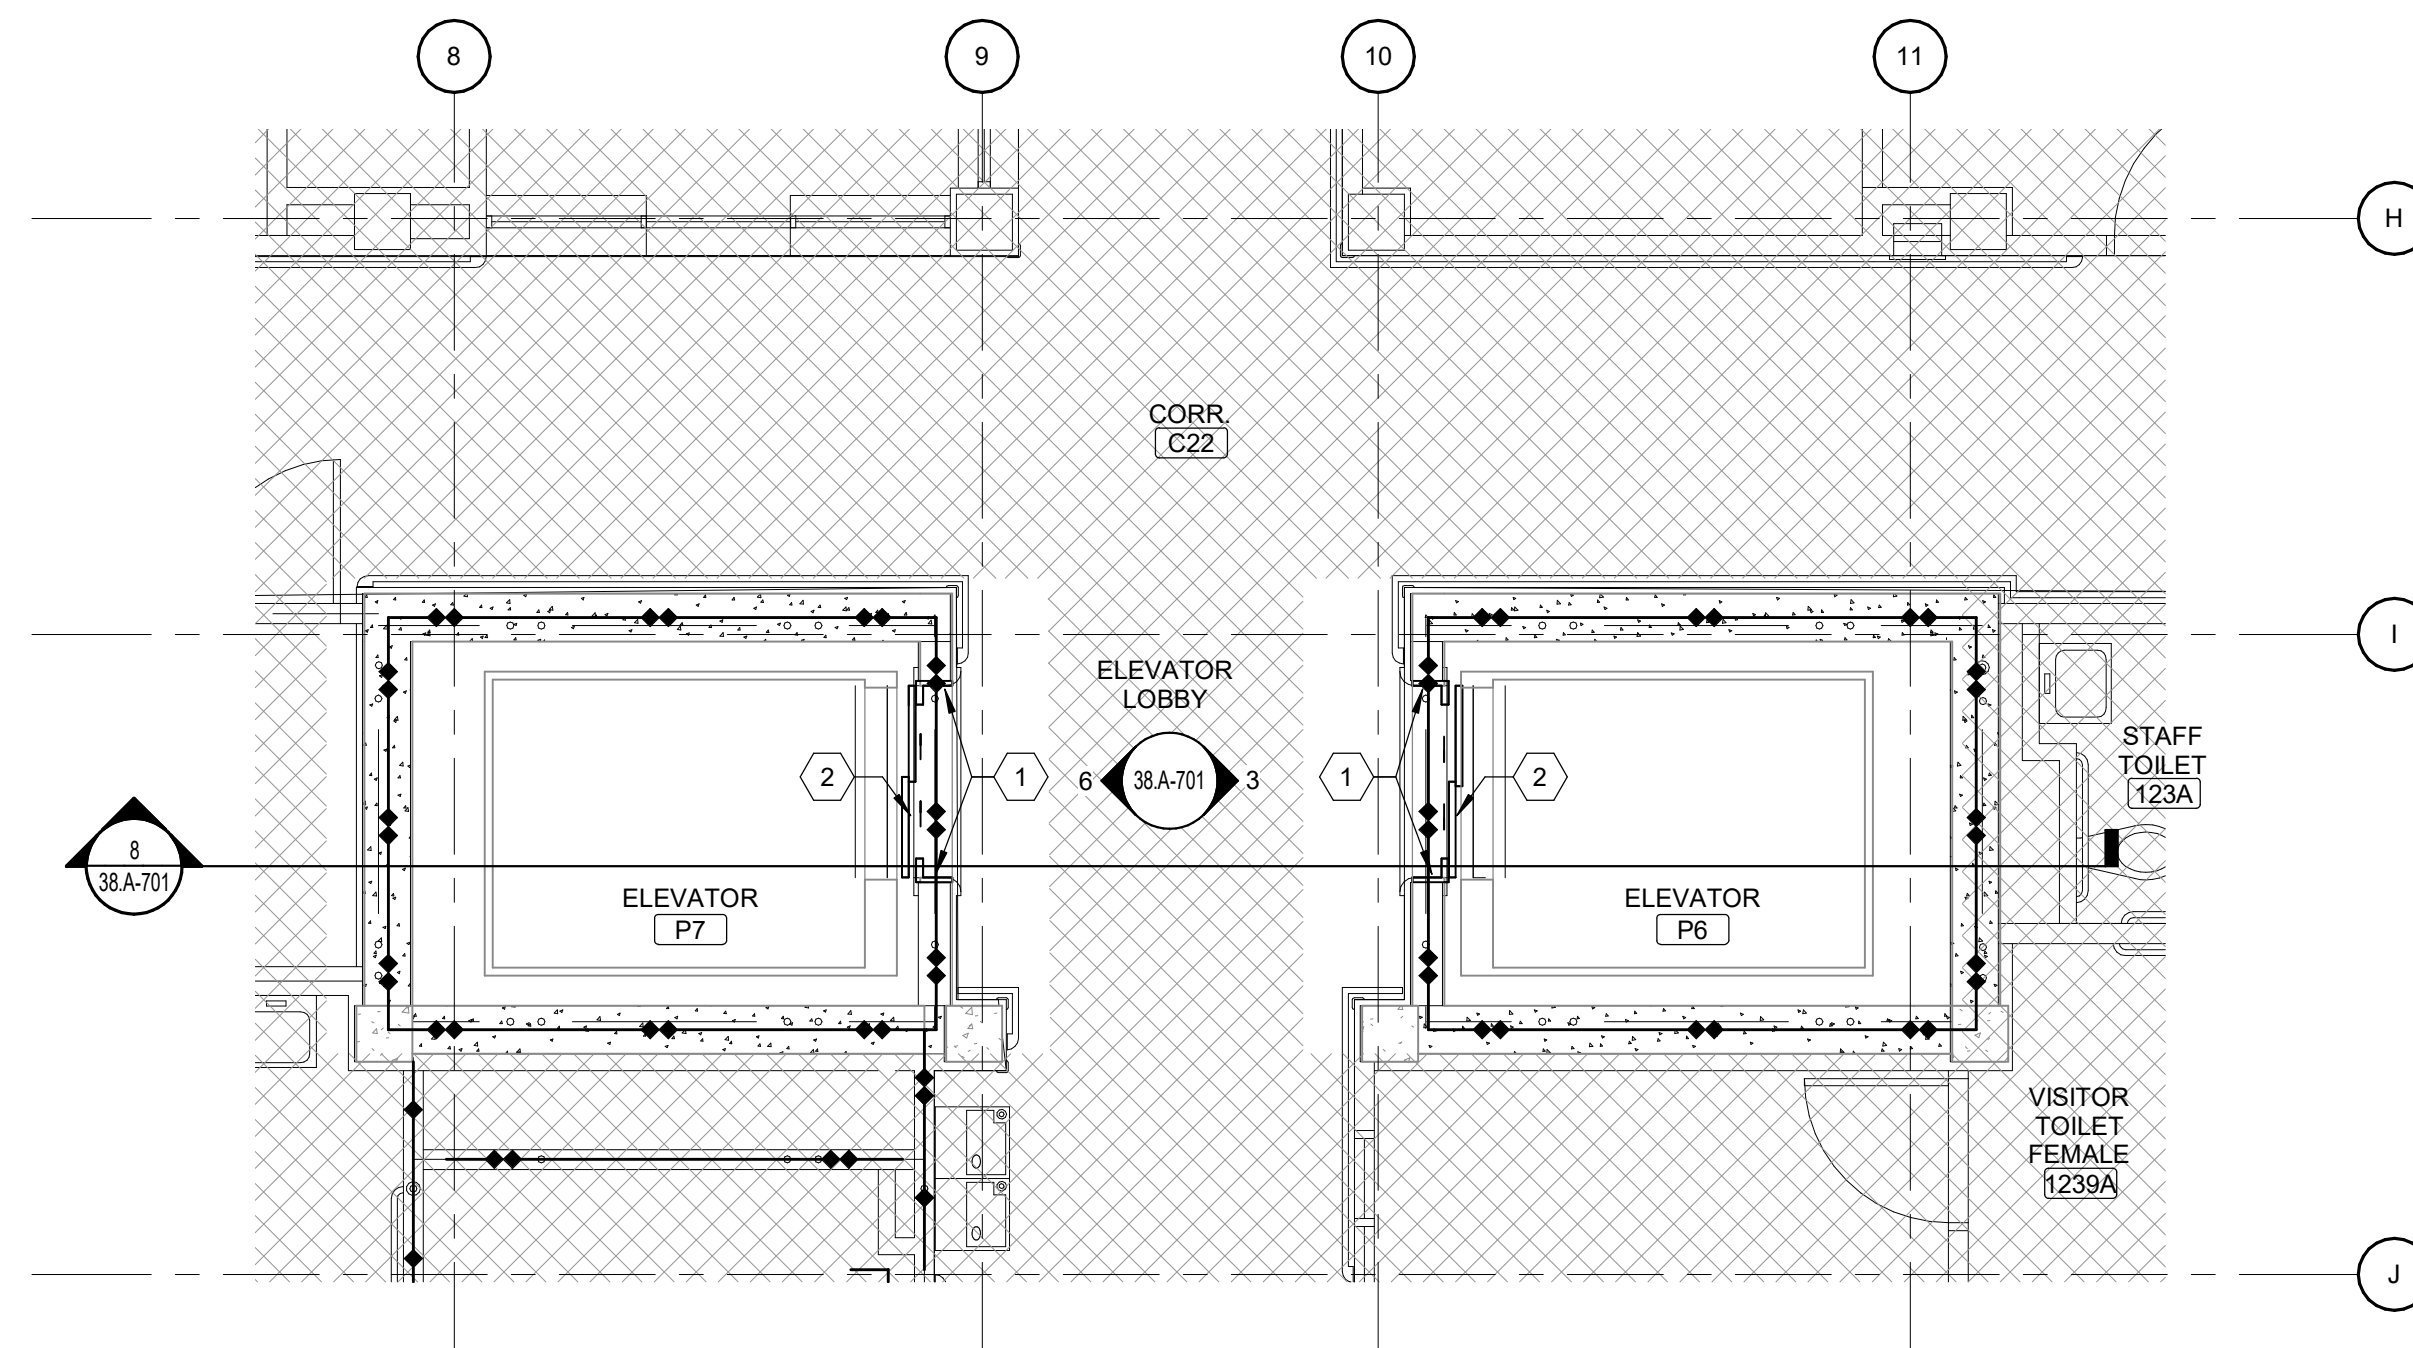


3 BUILDING 38 PARTIAL FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

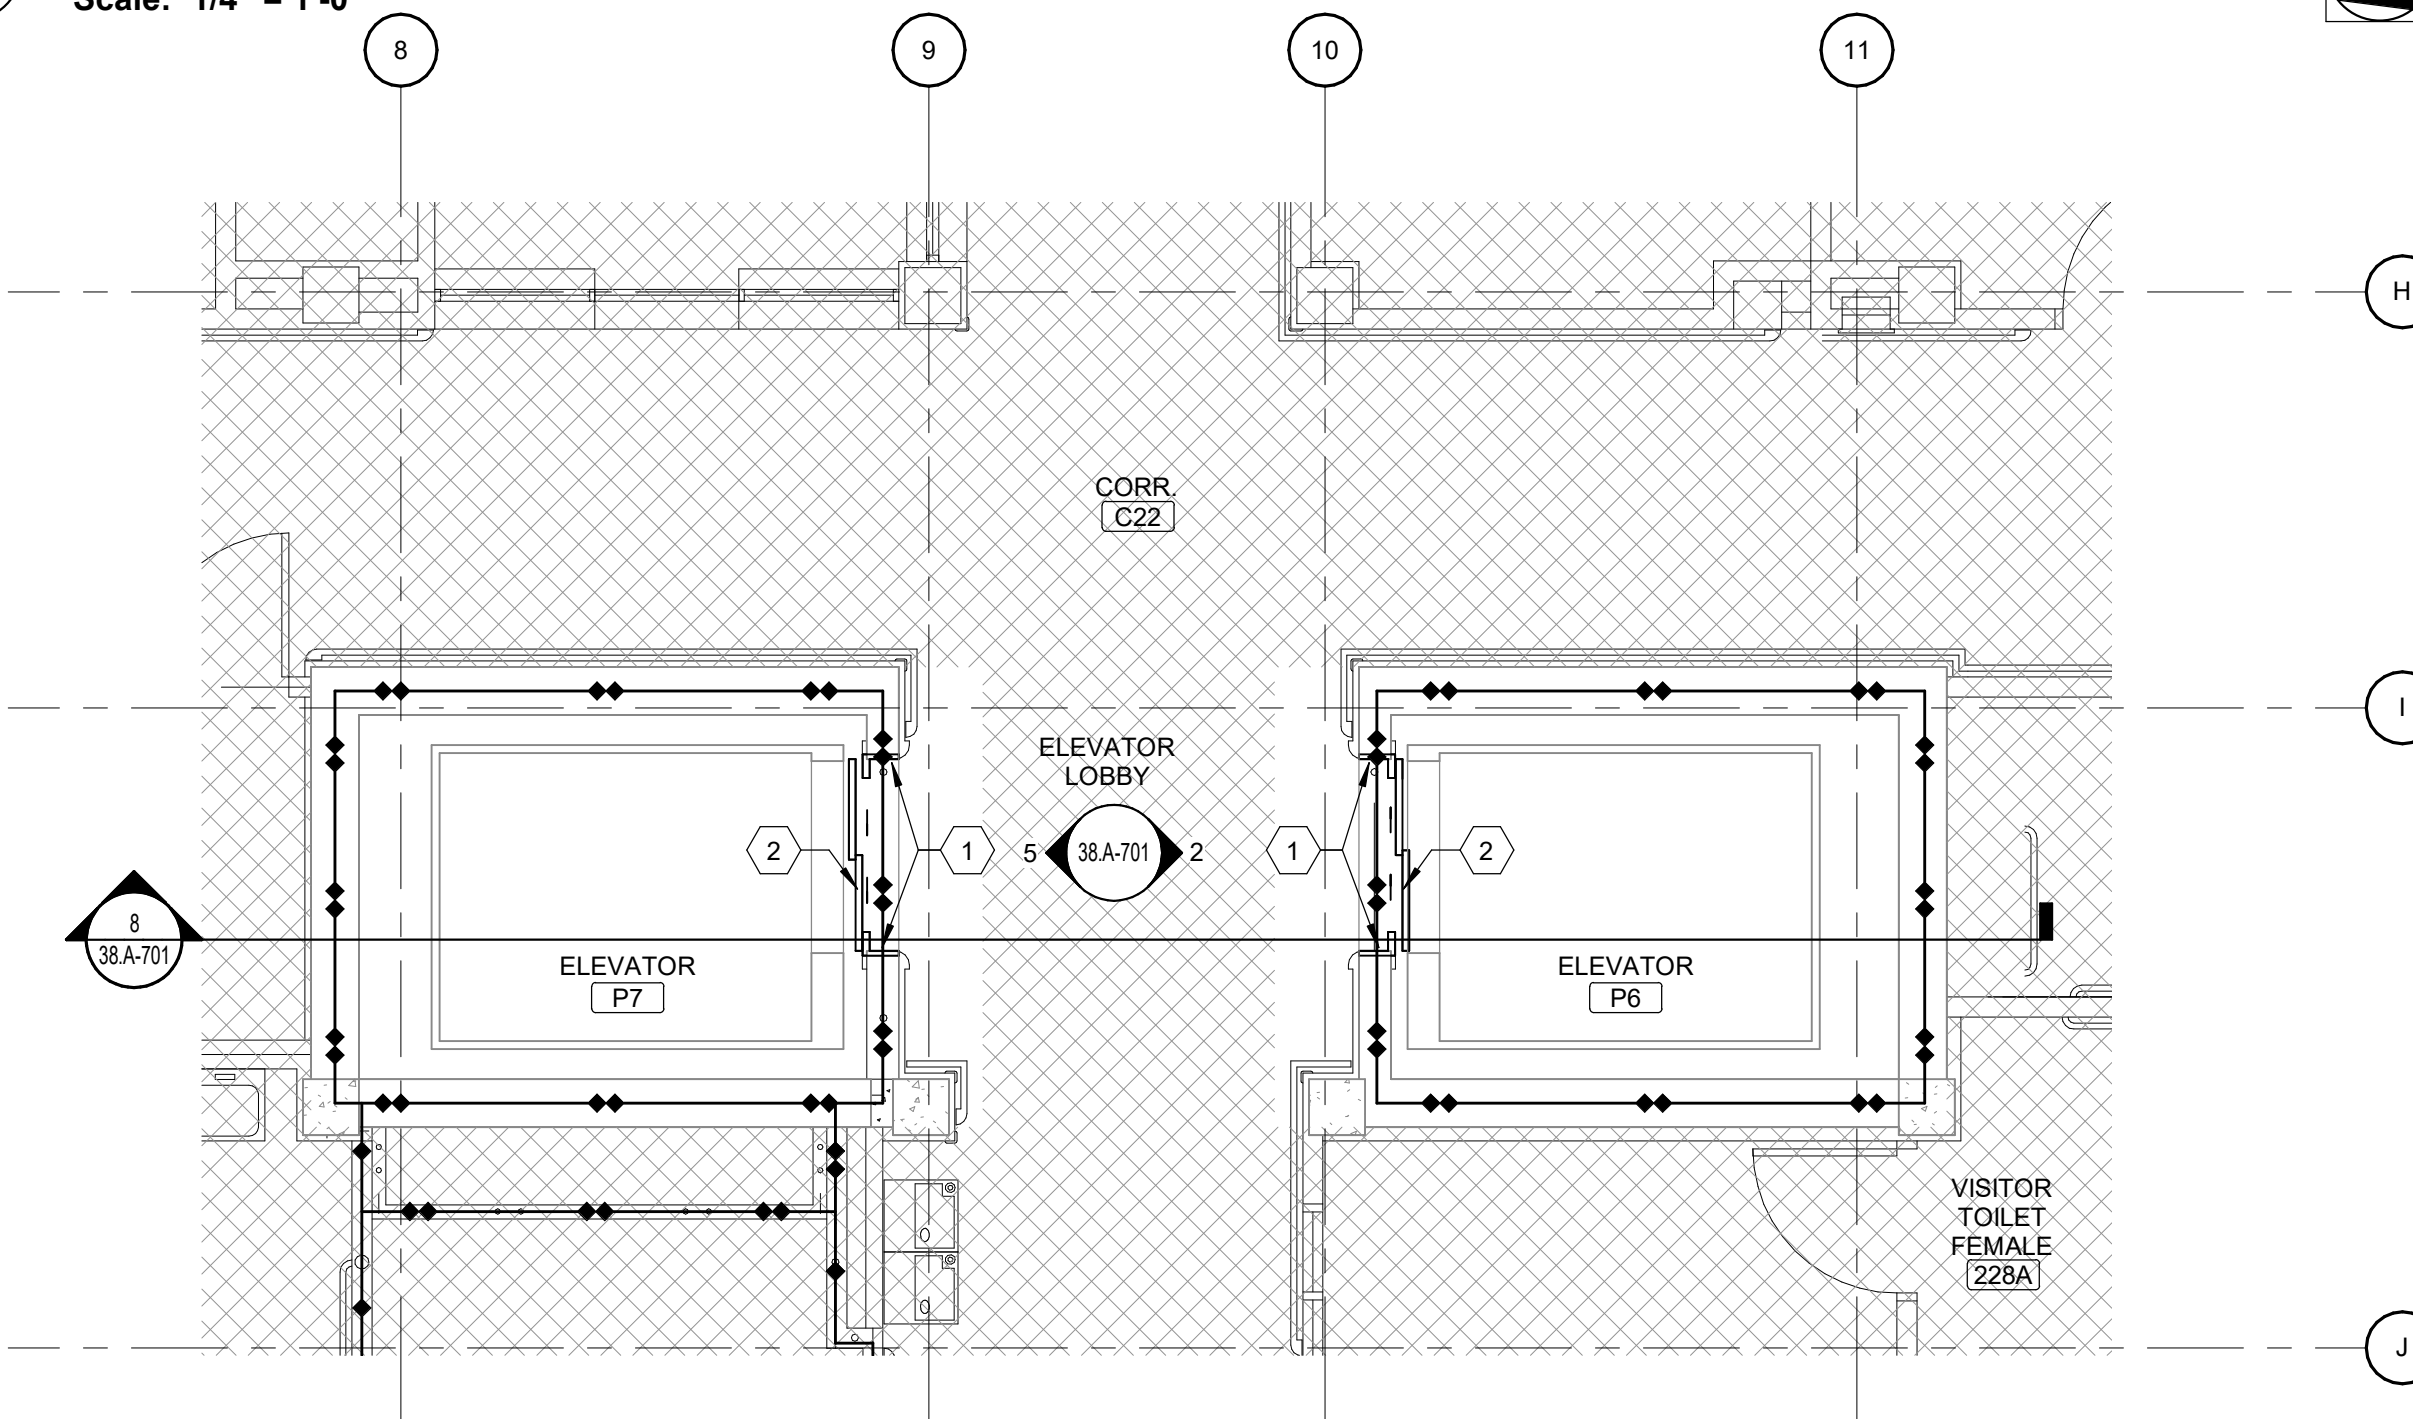


4 BUILDING 38 PARTIAL SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"

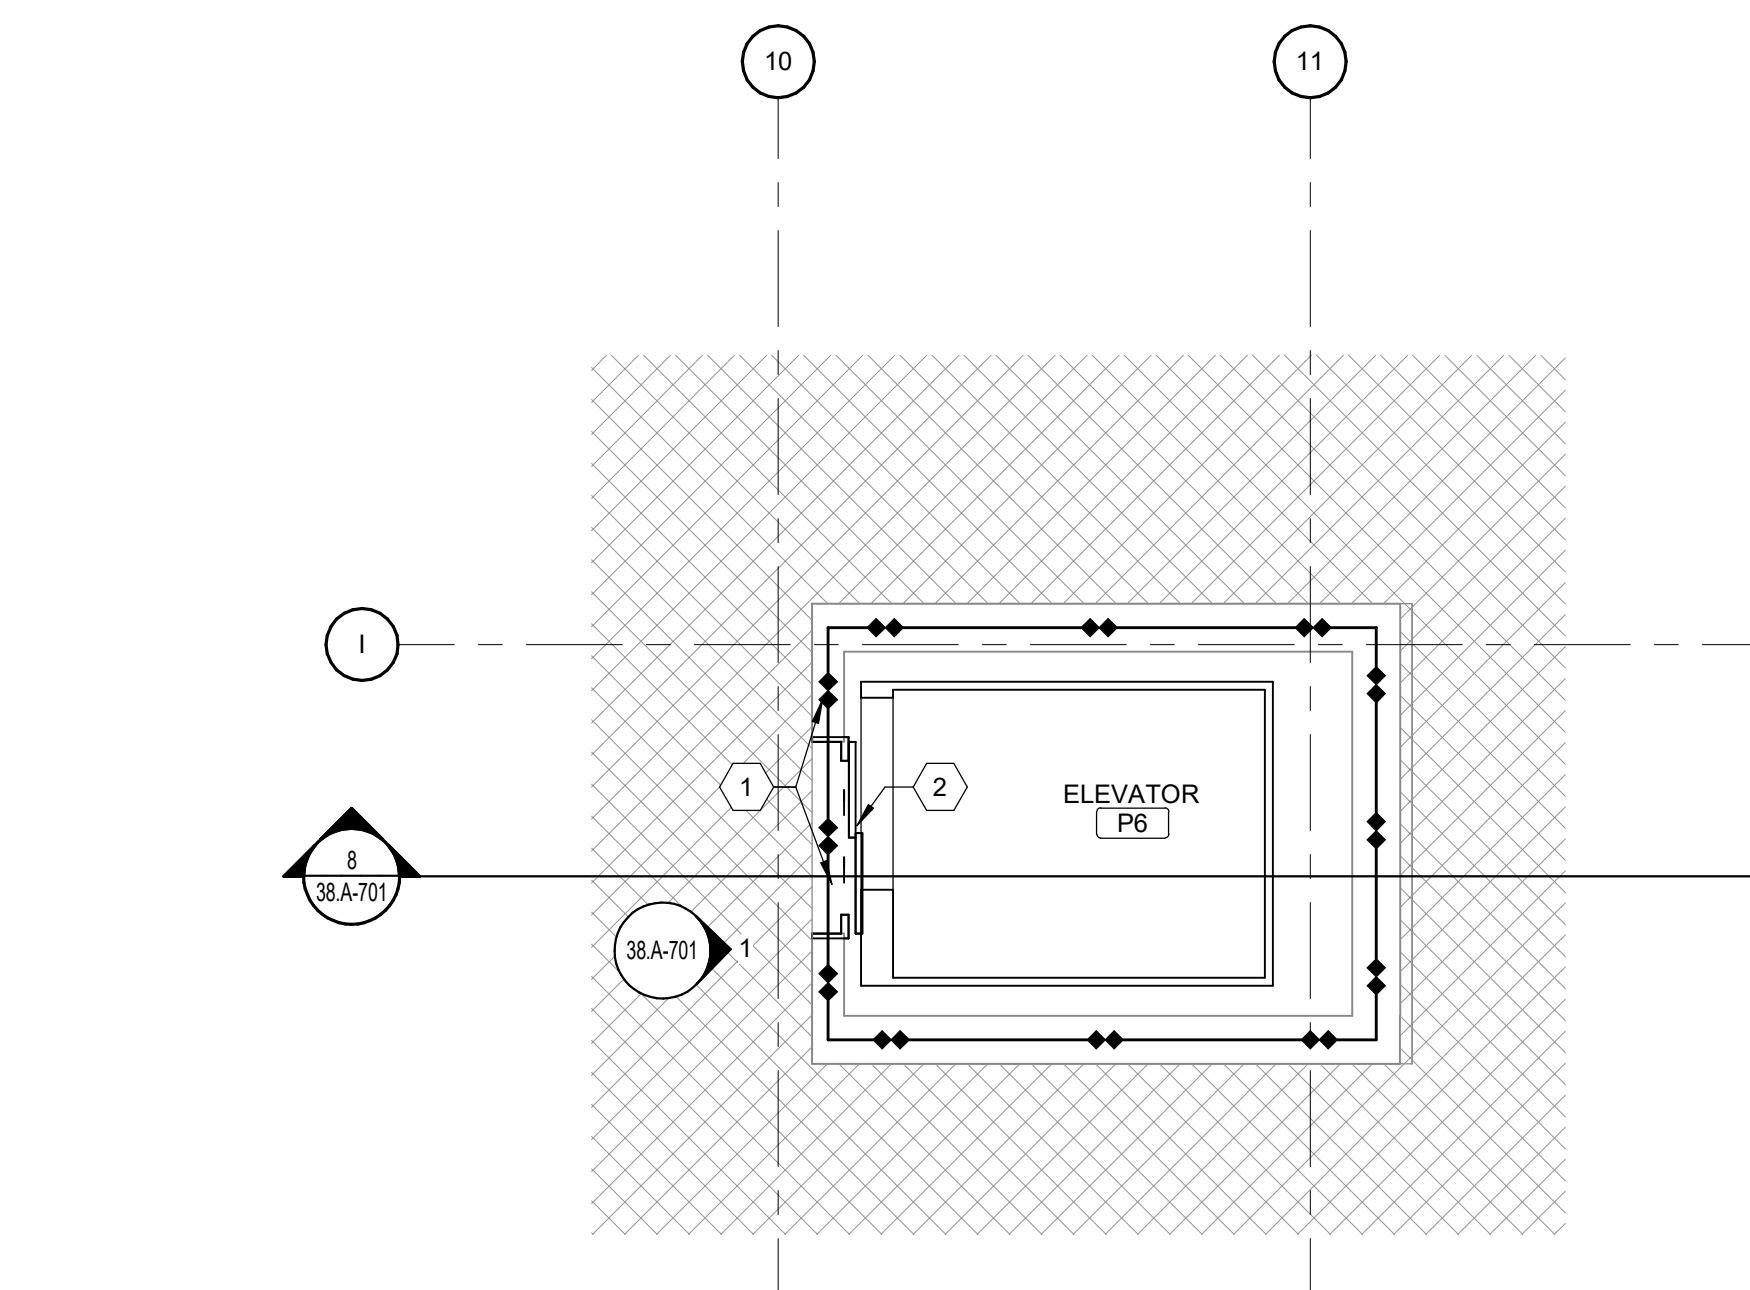

5 BUILDING 38 PARTIAL ATTIC FLOOR PLAN
Scale: 1/4" = 1'-0"

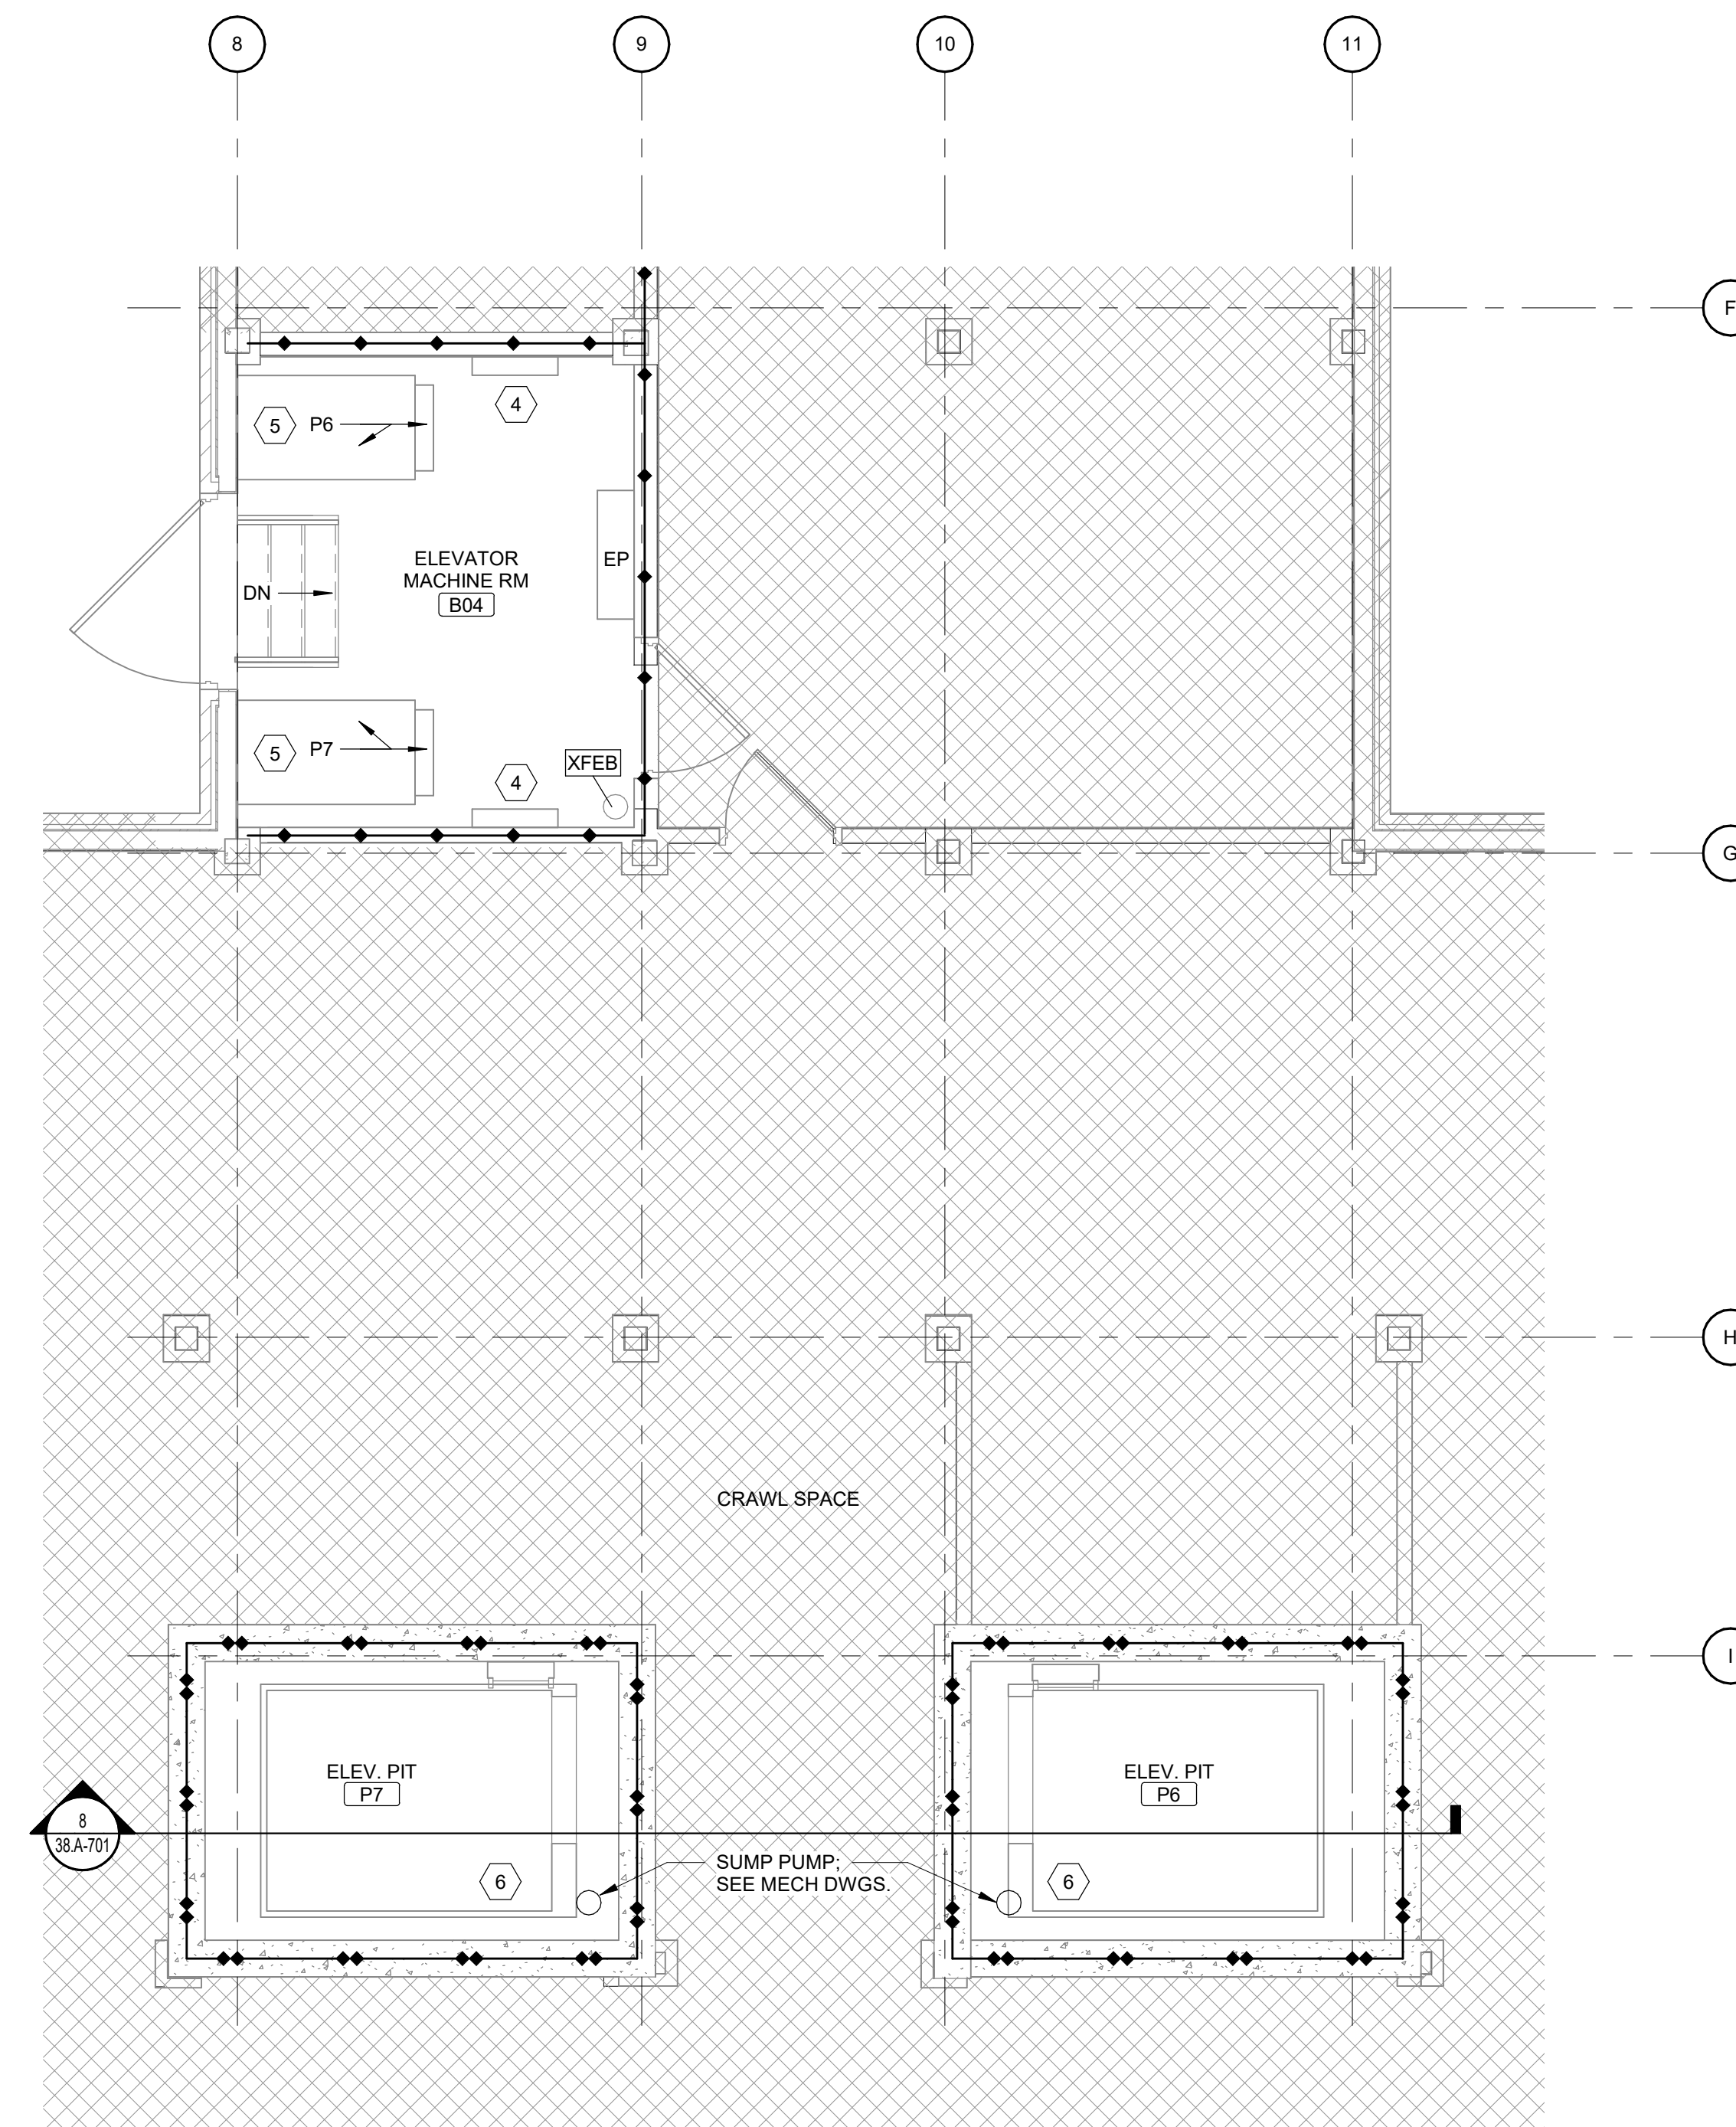

1 BUILDING 38 PARTIAL BASEMENT FLOOR PLAN
Scale: 1/4" = 1'-0"

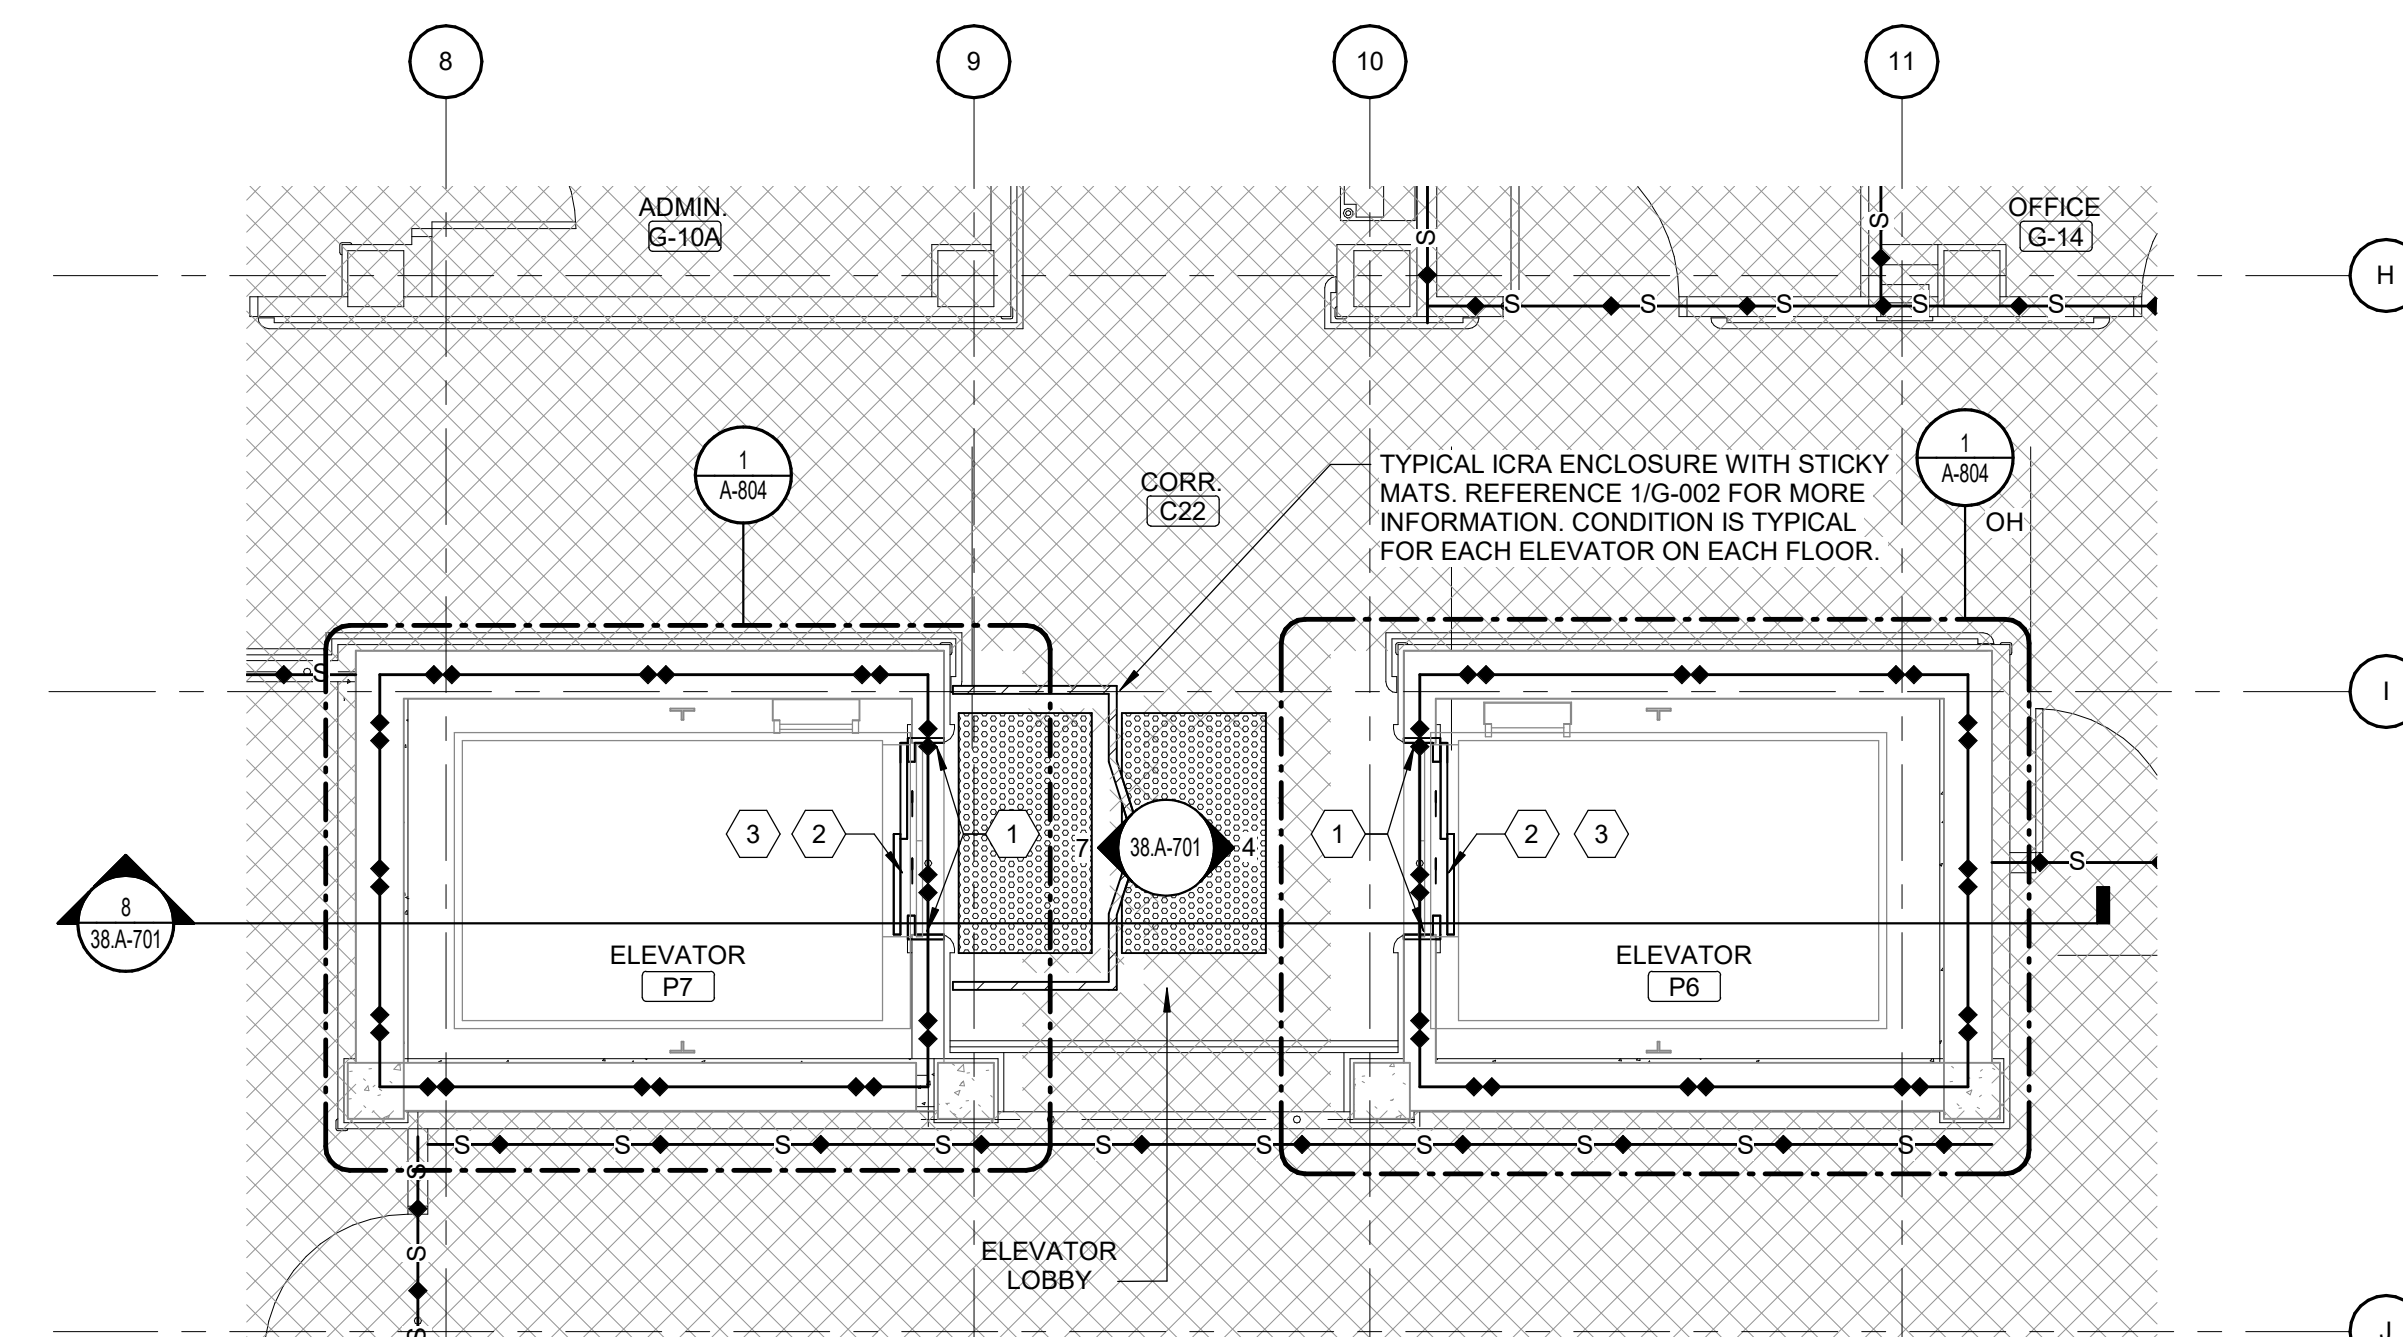

2 BUILDING 38 PARTIAL GROUND FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

- REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
- REFER TO SHEET A-801 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
- REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
- NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
- CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.
- NO WORK ON ELEVATOR SYSTEM TO BE COMPLETED PRIOR TO DELIVERY OF ALL COMPONENTS AND EQUIPMENT. ONCE ELEVATOR IS REMOVED FROM SERVICE FOR THE MODERNIZATION, CONTRACTOR TO CONTINUALLY MAN THE ELEVATOR MODERNIZATION WITH QUALIFIED ELEVATOR CREW ON THE NORMAL WORKING DAYS.

KEY NOTES:

- REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- NEW STAINLESS STEEL HOISTWAY DOORS.
- PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-804.
- REMOVE AND REPLACE CONTROLLER.
- REMOVE AND REPLACE HYDRAULIC POWER UNIT.
- REMOVE AND REPLACE SUMP PUMP.


ICRA LEGEND

- PLASTIC SHEET ICRA BARRIER
- ZIPPER DOOR
- STICKY MATS

NEW WORK LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- NEW WALL
- NEW DOOR
- NEW WINDOW
- NOT IN PROJECT SCOPE

KEY PLAN

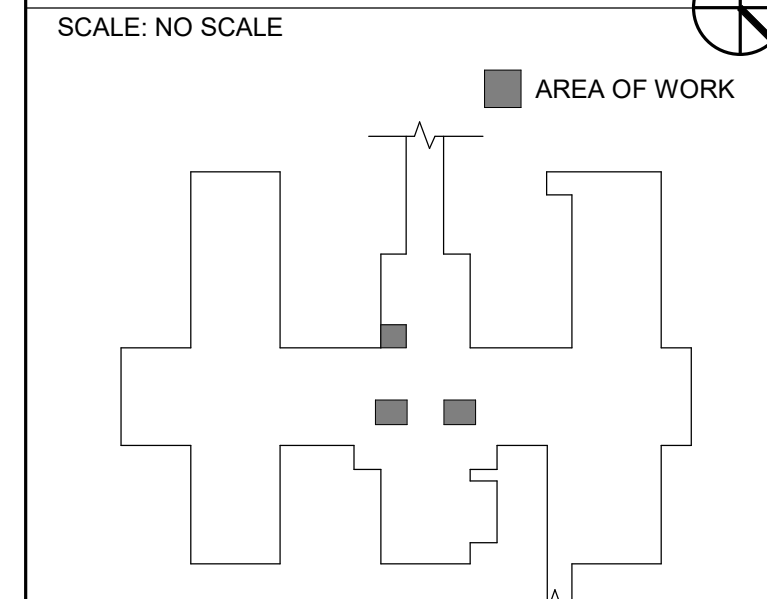


WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED 100% BID DOCUMENTS


CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title BUILDING 38 PARTIAL FLOOR PLANS - P6 & P7		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
			Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC		Approved		Building Number 38	
			www.acg-pa.com 919-858-7420						Date FEBRUARY 6, 2025		Checked DJR	
									Drawn LBB		Drawing Number 38.A-100	
											Dwg 8 of 21	

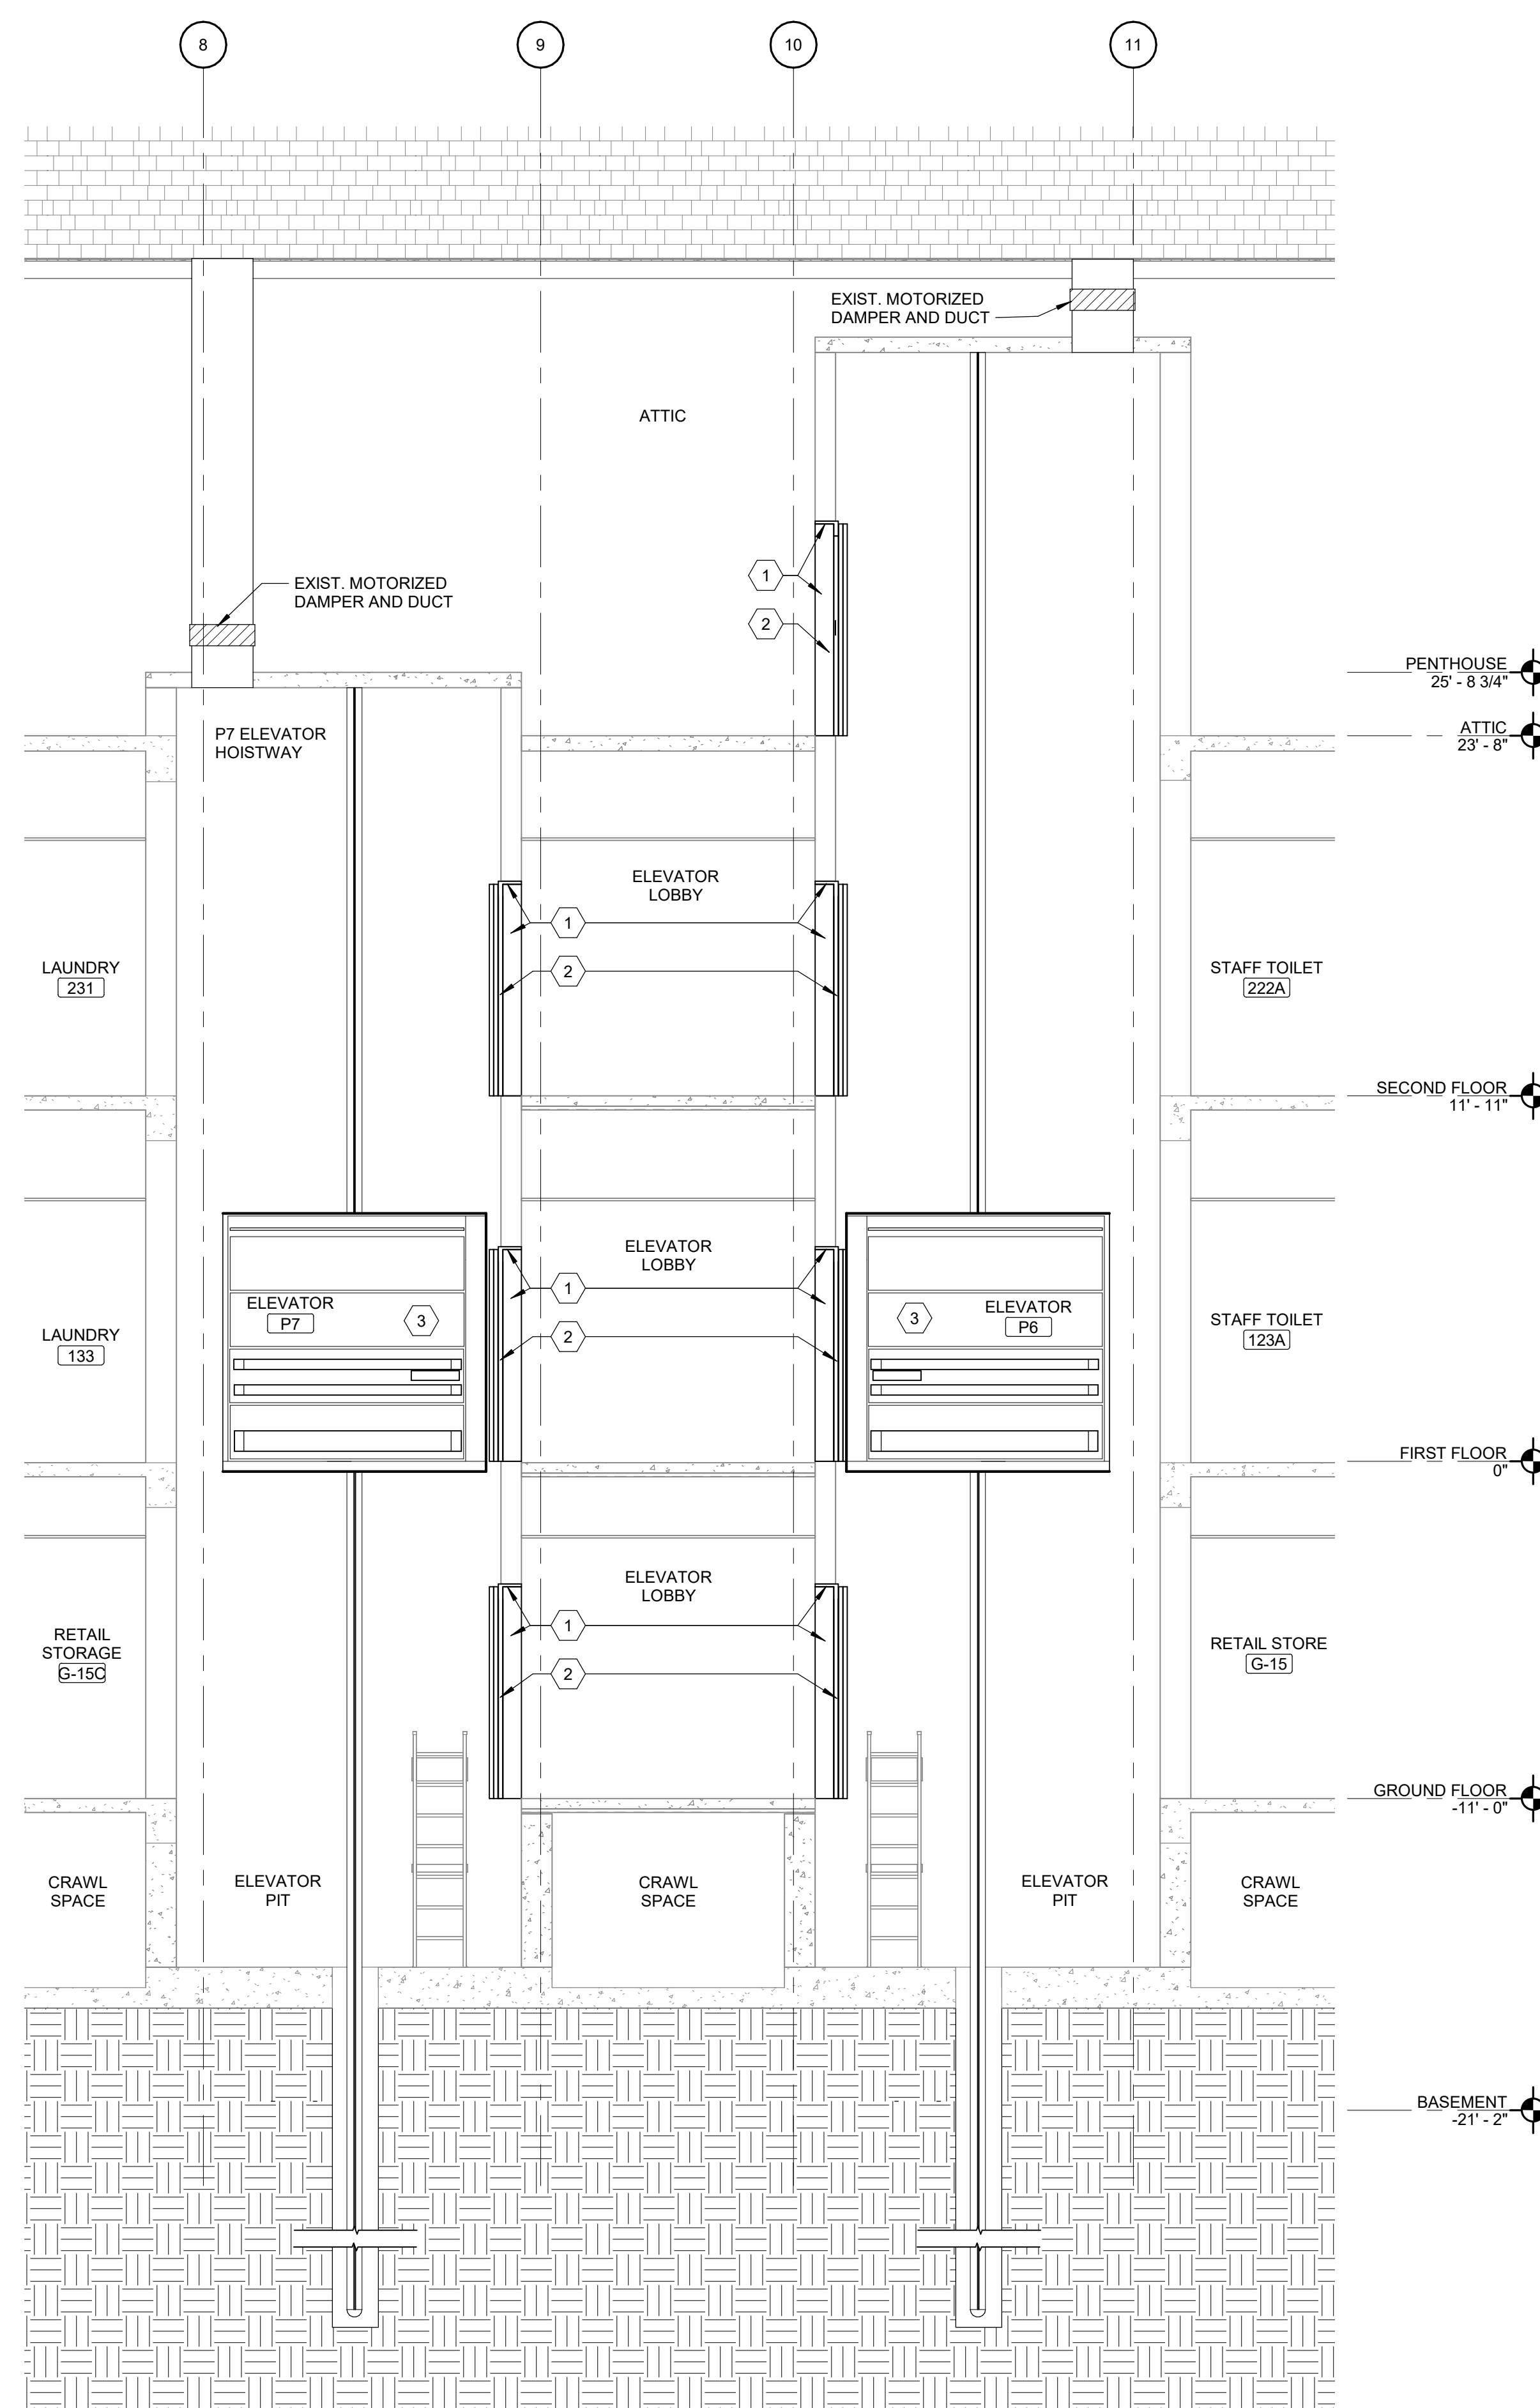


8 SECTION THROUGH ELEVATORS P7-P6
Scale: 1/4" = 1'-0"

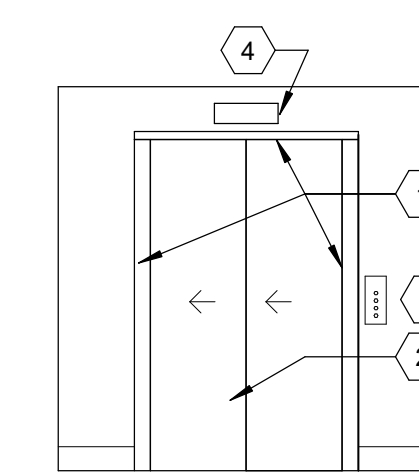


1 ELEV. @ ATTIC - P6
Scale: 1/4" = 1'-0"

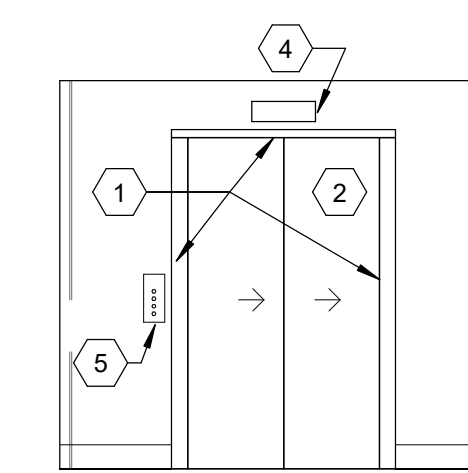


5 ELEV. @ SECOND FLOOR - P7
Scale: 1/4" = 1'-0"

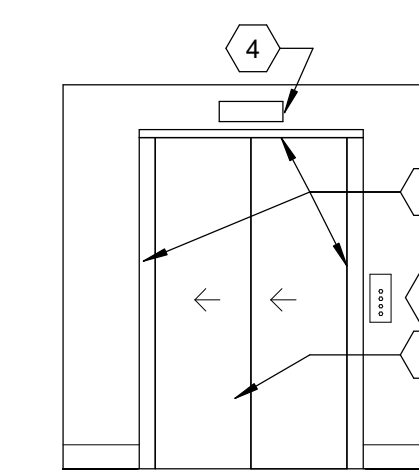


2 ELEV. @ SECOND FLOOR - P6
Scale: 1/4" = 1'-0"

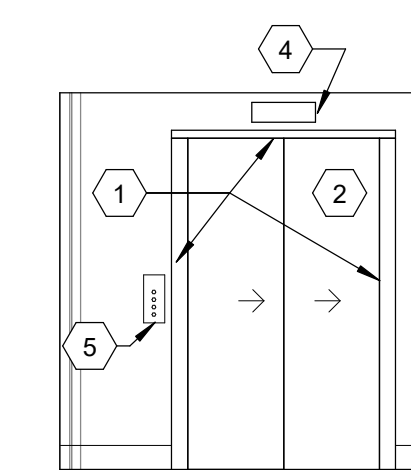


6 ELEV. @ FIRST FLOOR - P7
Scale: 1/4" = 1'-0"

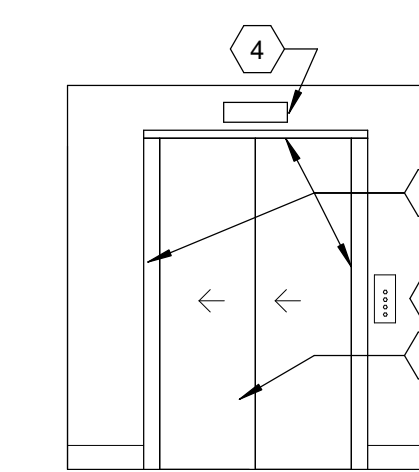

3 ELEV. @ FIRST FLOOR - P6
Scale: 1/4" = 1'-0"

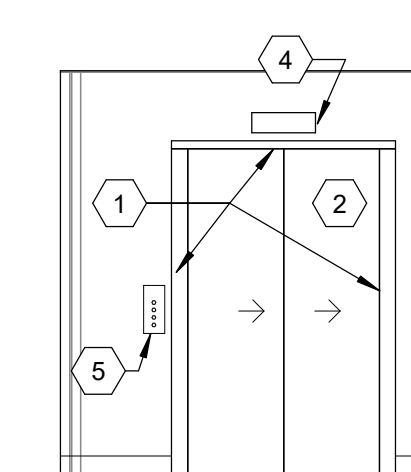

7 ELEV. @ GROUND FLOOR - P7
Scale: 1/4" = 1'-0"

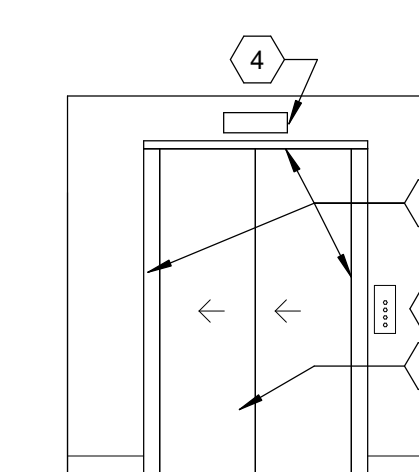

4 ELEV. @ GROUND FLOOR - P6
Scale: 1/4" = 1'-0"

- ## SHEET NOTES:
1. REFER TO SHEET A-601 FOR PARTITION TYPES AND DETAILS.
 2. REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
 3. REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
 4. REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
 5. THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
 6. NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DIMENSIONS AND SPECS PRIOR TO THE START OF WORK.
 7. CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. EQUIPMENT BY PATCHING AND REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.

- | # | KEY NOTES: |
|---|--|
| 1 | REFINISH EXISTING STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS. |
| 2 | NEW STAINLESS STEEL HOISTWAY DOORS. |
| 3 | PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION, SEE A-804. |
| 4 | NEW HALL LANTERN, EXISTING BACK BOXES TO REMAIN |
| 5 | NEW CALL BUTTONS, EXISTING BACK BOXES TO REMAIN |

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

3 BUILDING 135 PARTIAL FIRST FLOOR PLAN
Scale: 1/4" = 1'-0"

2 BUILDING 135 PARTIAL BASEMENT FLOOR PLAN
Scale: 1/4" = 1'-0"

1 BUILDING 135 PARTIAL GROUND FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

- REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
- REFER TO SHEET A-801 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
- REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
- NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
- CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.
- NO WORK ON ELEVATOR SYSTEM TO BE COMPLETED PRIOR TO DELIVERY OF ALL COMPONENTS AND EQUIPMENT. ONCE ELEVATOR IS REMOVED FROM SERVICE FOR THE MODERNIZATION, CONTRACTOR TO CONTINUALLY MAN THE ELEVATOR MODERNIZATION WITH QUALIFIED ELEVATOR CREW ON THE NORMAL WORKING DAYS.
- ONLY ONE ELEVATOR IN EACH GROUP SHALL BE WORKED ON. IF ANY WORK REQUIRING SHUTDOWN OF POWER, LOSS OF GROUP OPERATION, OR ALL ELEVATORS IN THE BANK TO BE OUT OF SERVICE, WORK SHALL BE CONDUCTED AFTER HOURS AS DETERMINED BY THE VA.

KEY NOTES:

- REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- NEW STAINLESS STEEL DOORS.
- PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-805.
- REMOVE AND REPLACE CONTROLLER.
- REMOVE AND REPLACE HYDRAULIC POWER UNIT.
- REMOVE AND REPLACE ELEC. DISCONNECT.
- DOOR AND FRAME TO BE REPLACED WITH 45 MINUTE FIRE-RATED DOOR AND FRAME.
- EXISTING ELECTRICAL PANEL TO REMAIN.
- REMOVE AND REPLACE SUMP PUMP.
- PATCH AND REPAIR WALL TO MATCH EXISTING FROM MECHANICAL EQUIPMENT REMOVAL.


ICRA LEGEND

- PLASTIC SHEET ICRA BARRIER
- ZIPPER DOOR
- STICKY MATS

NEW WORK LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- NEW WALL
- NEW DOOR
- NEW WINDOW
- NOT IN PROJECT SCOPE

KEY PLAN


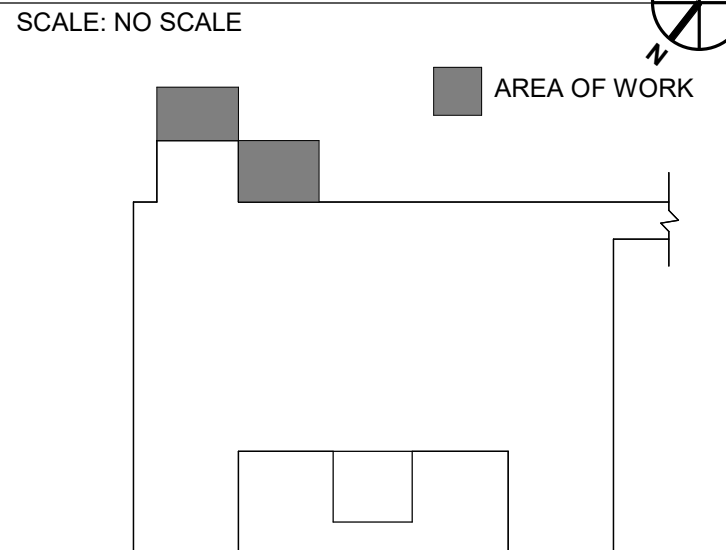


WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

CONSULTANTS:

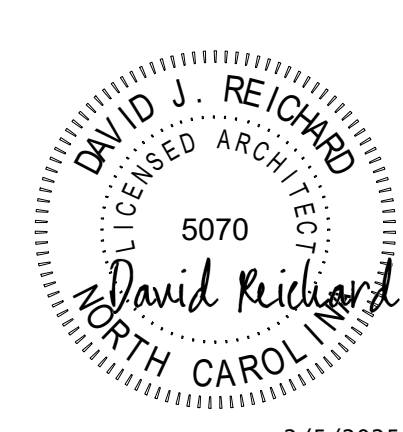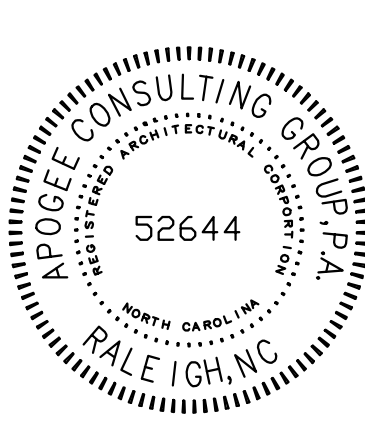


PROJECT MANAGER
Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of
Construction
and Facilities
Management
VA U.S. Department
of Veterans Affairs


Drawing Title
**BUILDING 135 PARTIAL FLOOR PLANS -
P14 & P15**
Location
TUSCALOOSA VAMC

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**
Approved
Date
FEBRUARY 6, 2025
Checked
DJR
Drawn
LBB


VA PROJECT NUMBER
679-22-100
Building Number
135
Drawing Number
135.A-100
Dwg 10 of 21

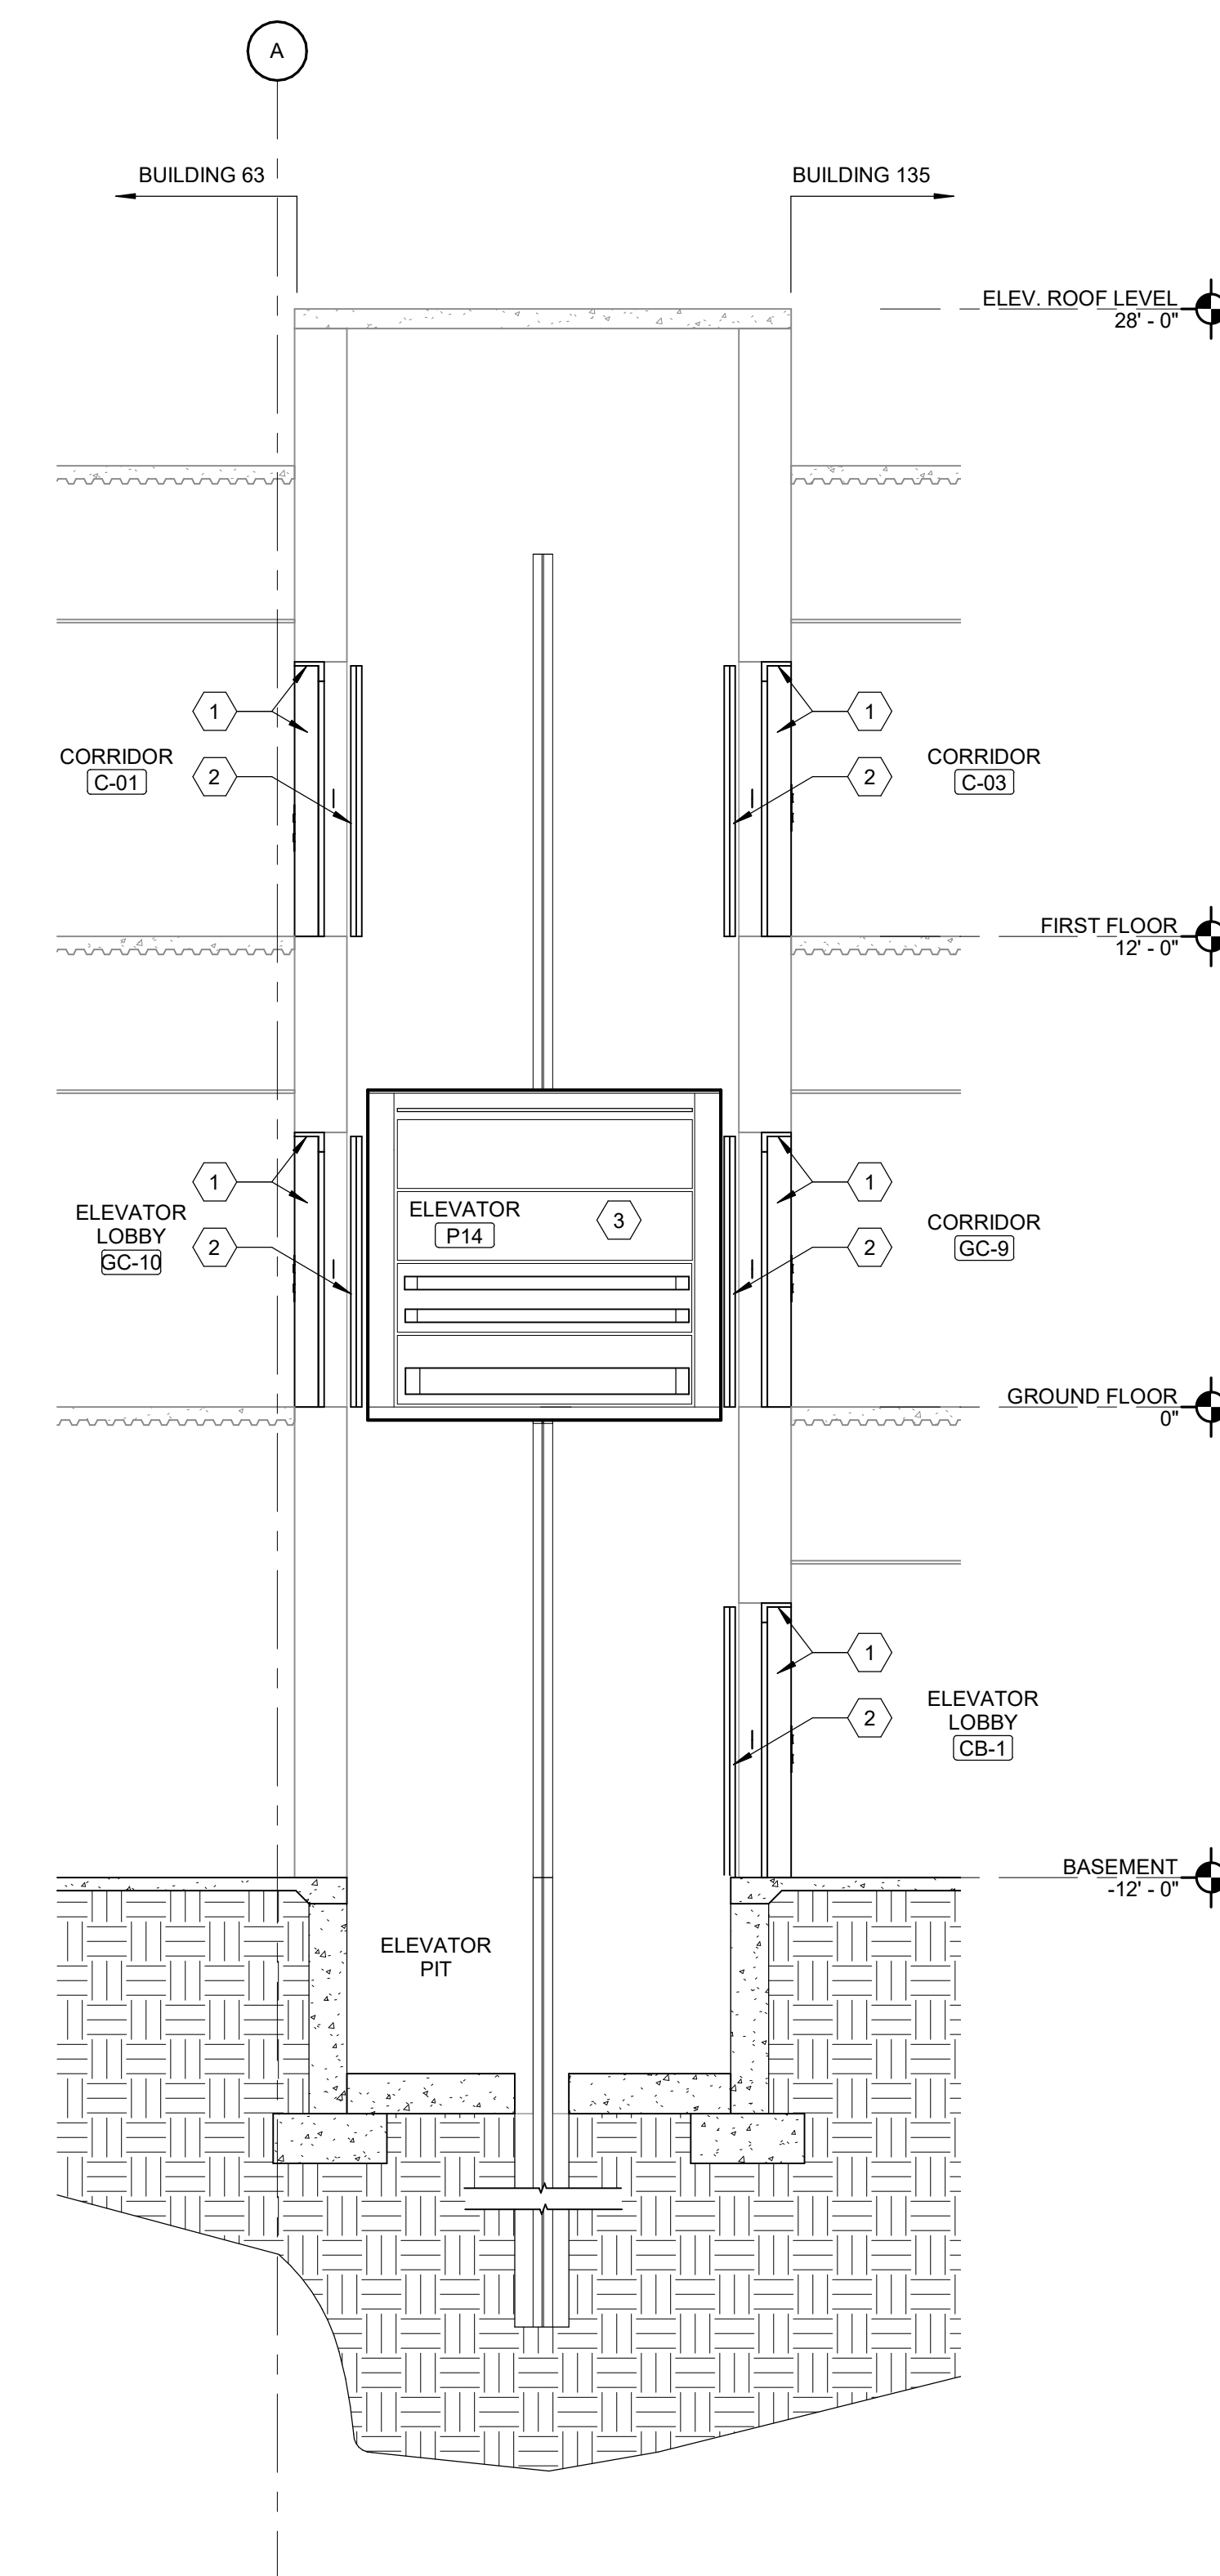


4 ELEVATOR @ FIRST FLOOR - P14 & P15 - REAR
Scale: 1/4" = 1'-0"

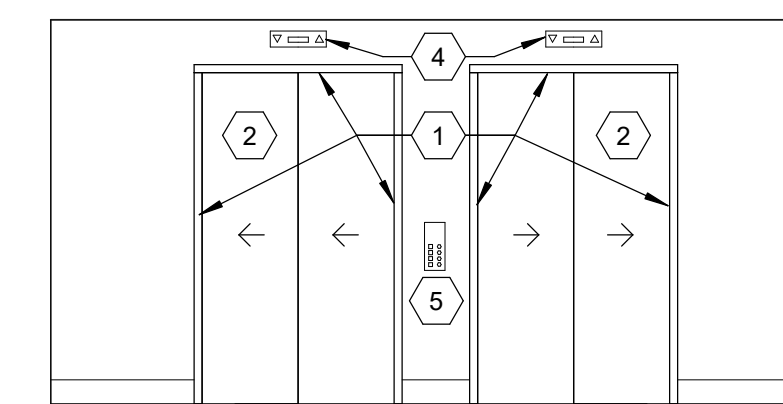


1 ELEVATOR @ FIRST FLOOR - P14 & P15
Scale: 1/4" = 1'-0"

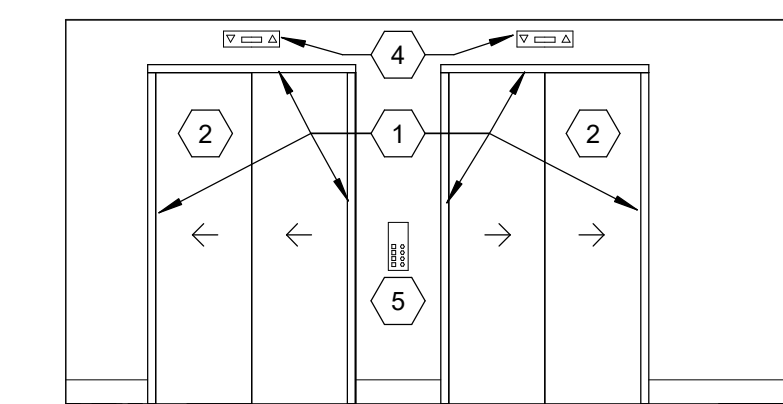


5 ELEVATOR @ GROUND FLOOR - P14 & P15 - REAR
Scale: 1/4" = 1'-0"

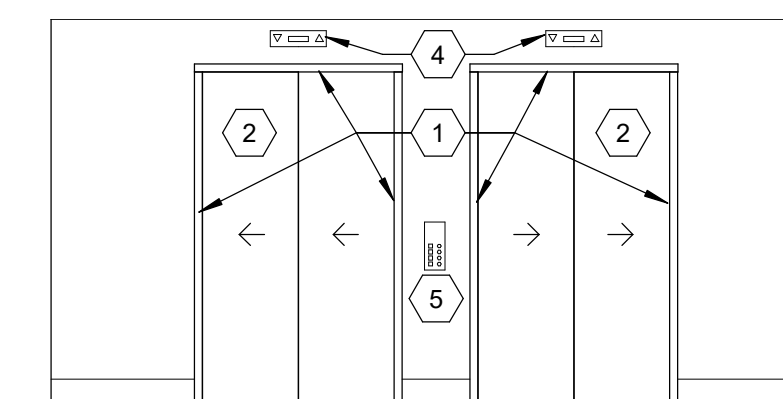

2 ELEVATOR @ GROUND FLOOR - P14 & P15
Scale: 1/4" = 1'-0"

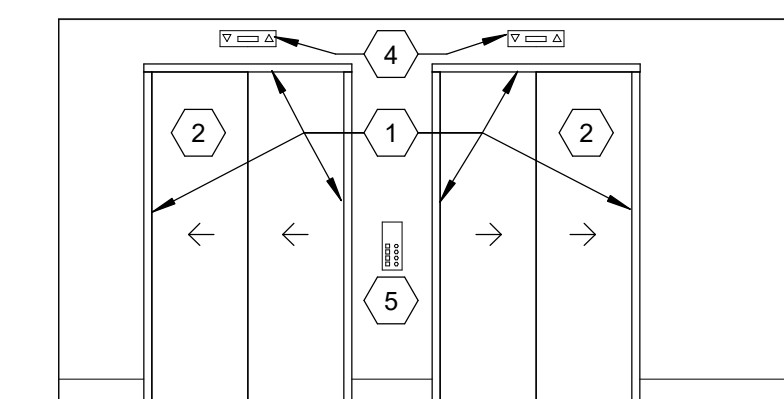

3 ELEVATOR @ BASEMENT - P14 & P15
Scale: 1/4" = 1'-0"

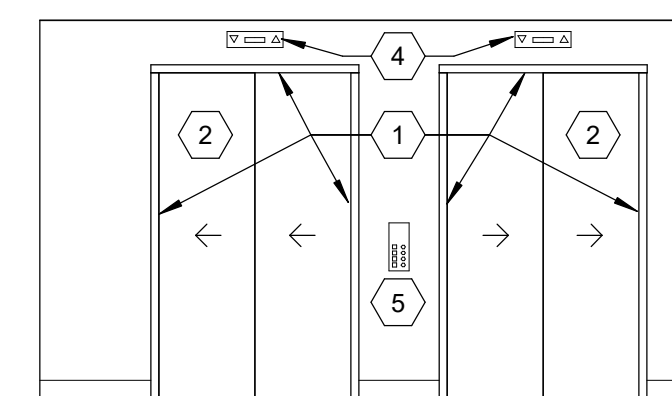

SHEET NOTES:


1. REFER TO SHEET A-001 FOR PARTITION TYPES AND DETAILS.
2. REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
3. REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
4. REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
5. THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
6. NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
7. CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LIGHTS, ETC. EQUIPMENT BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.
8. ONLY ONE ELEVATOR IN EACH GROUP SHALL BE WORKED ON IF ANY WORK REQUIRING SHUTDOWN OF POWER, LOSS OF GROUP OPERATION, OR ALL ELEVATORS IN THE BANK TO BE OUT OF SERVICE, WORK SHALL BE COMPLETED AFTER HOURS AS DETERMINED BY THE VA.

 KEY NOTES:


- 1 REFINISH EXISTING STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- 2 NEW STAINLESS STEEL HOISTWAY DOORS.
- 3 PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION, SEE A-805.
- 4 NEW HALL LANTERNS, EXISTING BACK BOXES TO REMAIN.
- 5 NEW CALL BUTTONS, EXISTING BACK BOXES TO REMAIN.

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

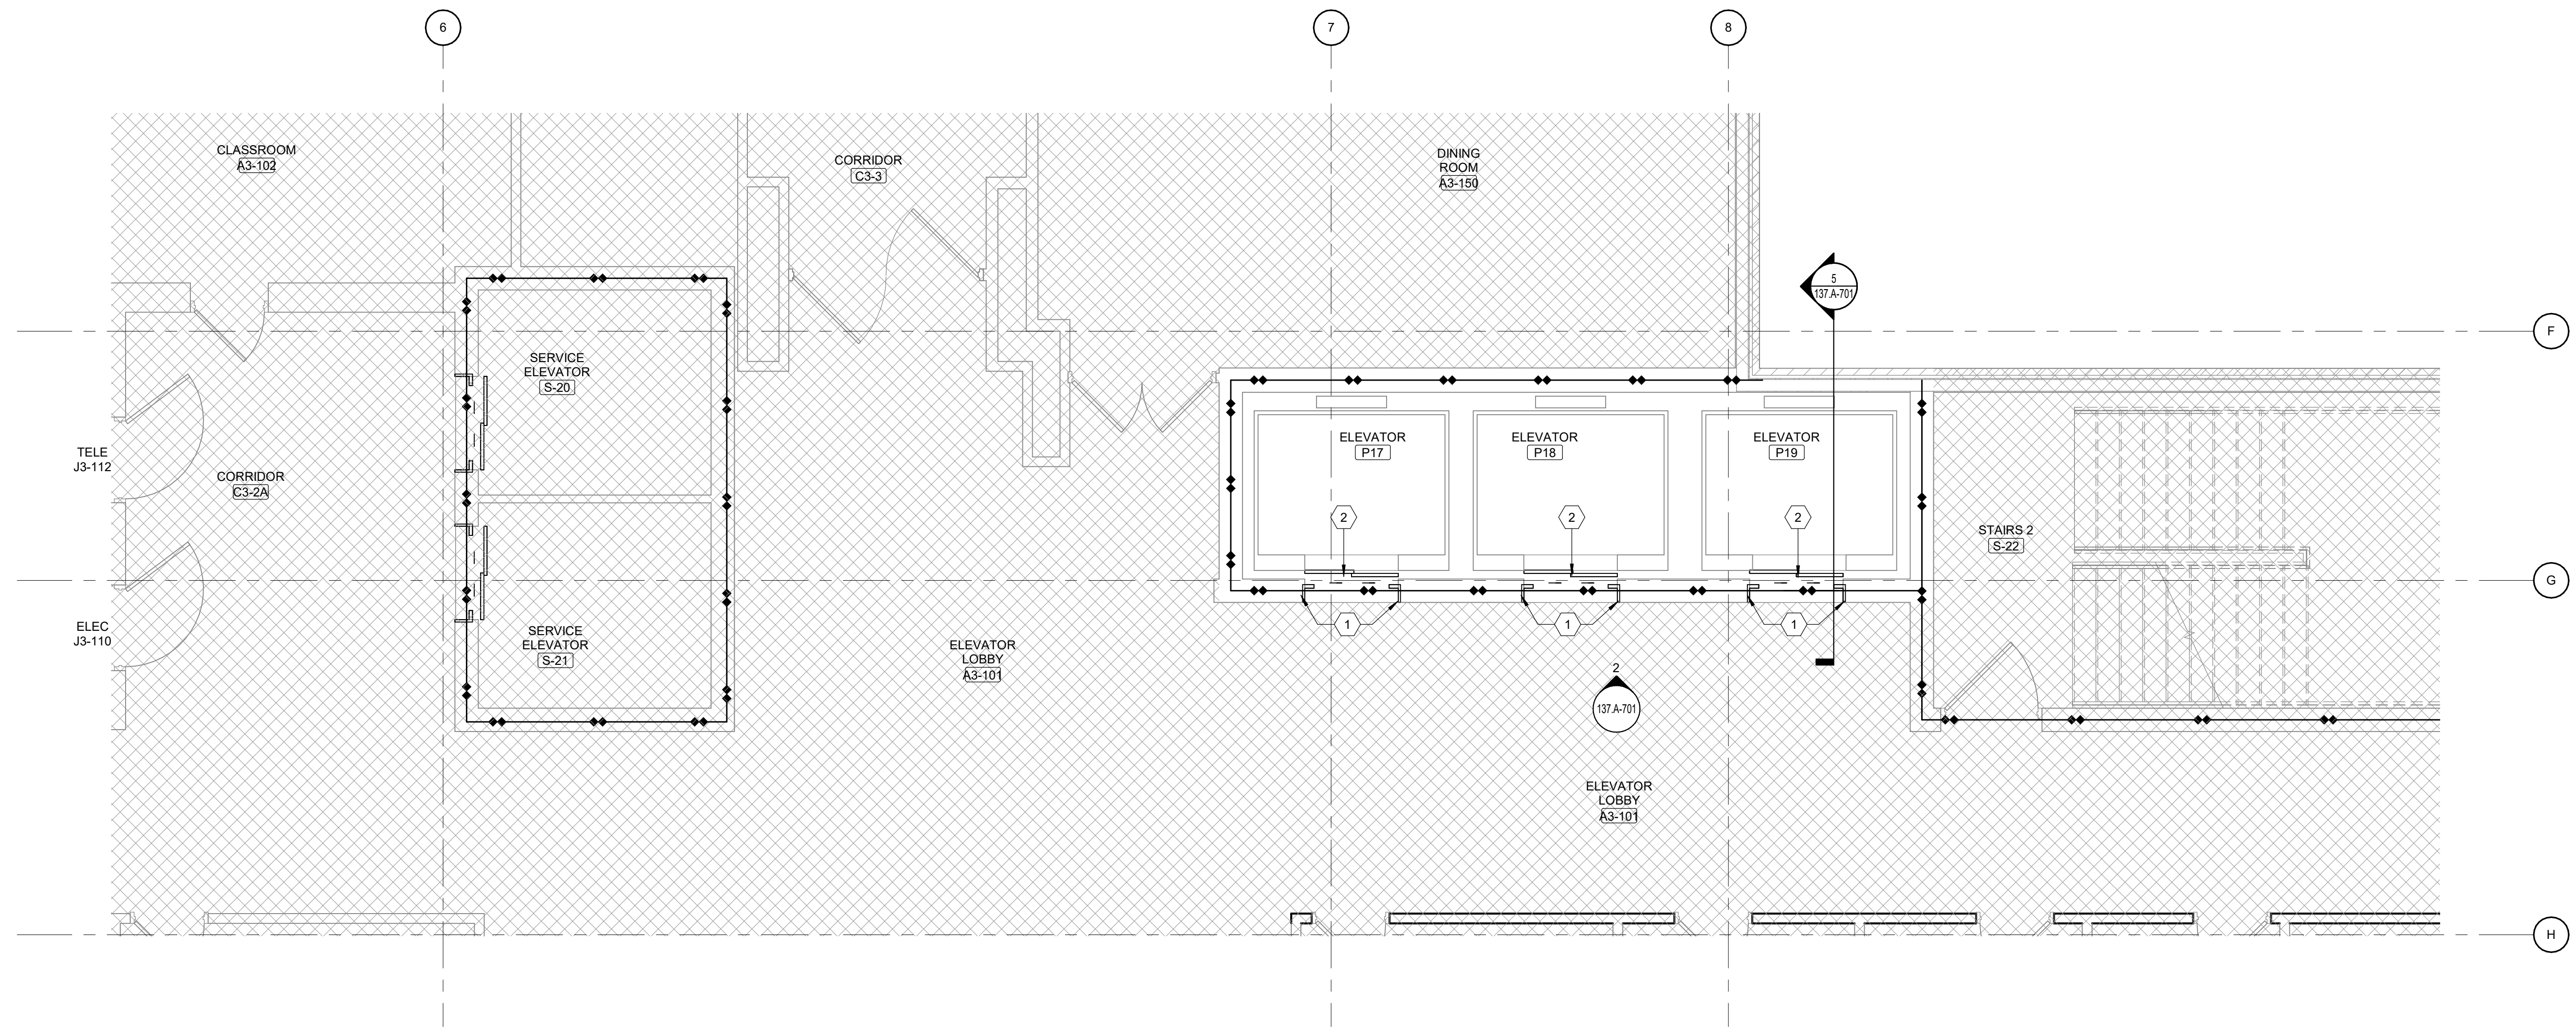

1 BUILDING 137 PARTIAL THIRD FLOOR PLAN
Scale: 1/4" = 1'-0"

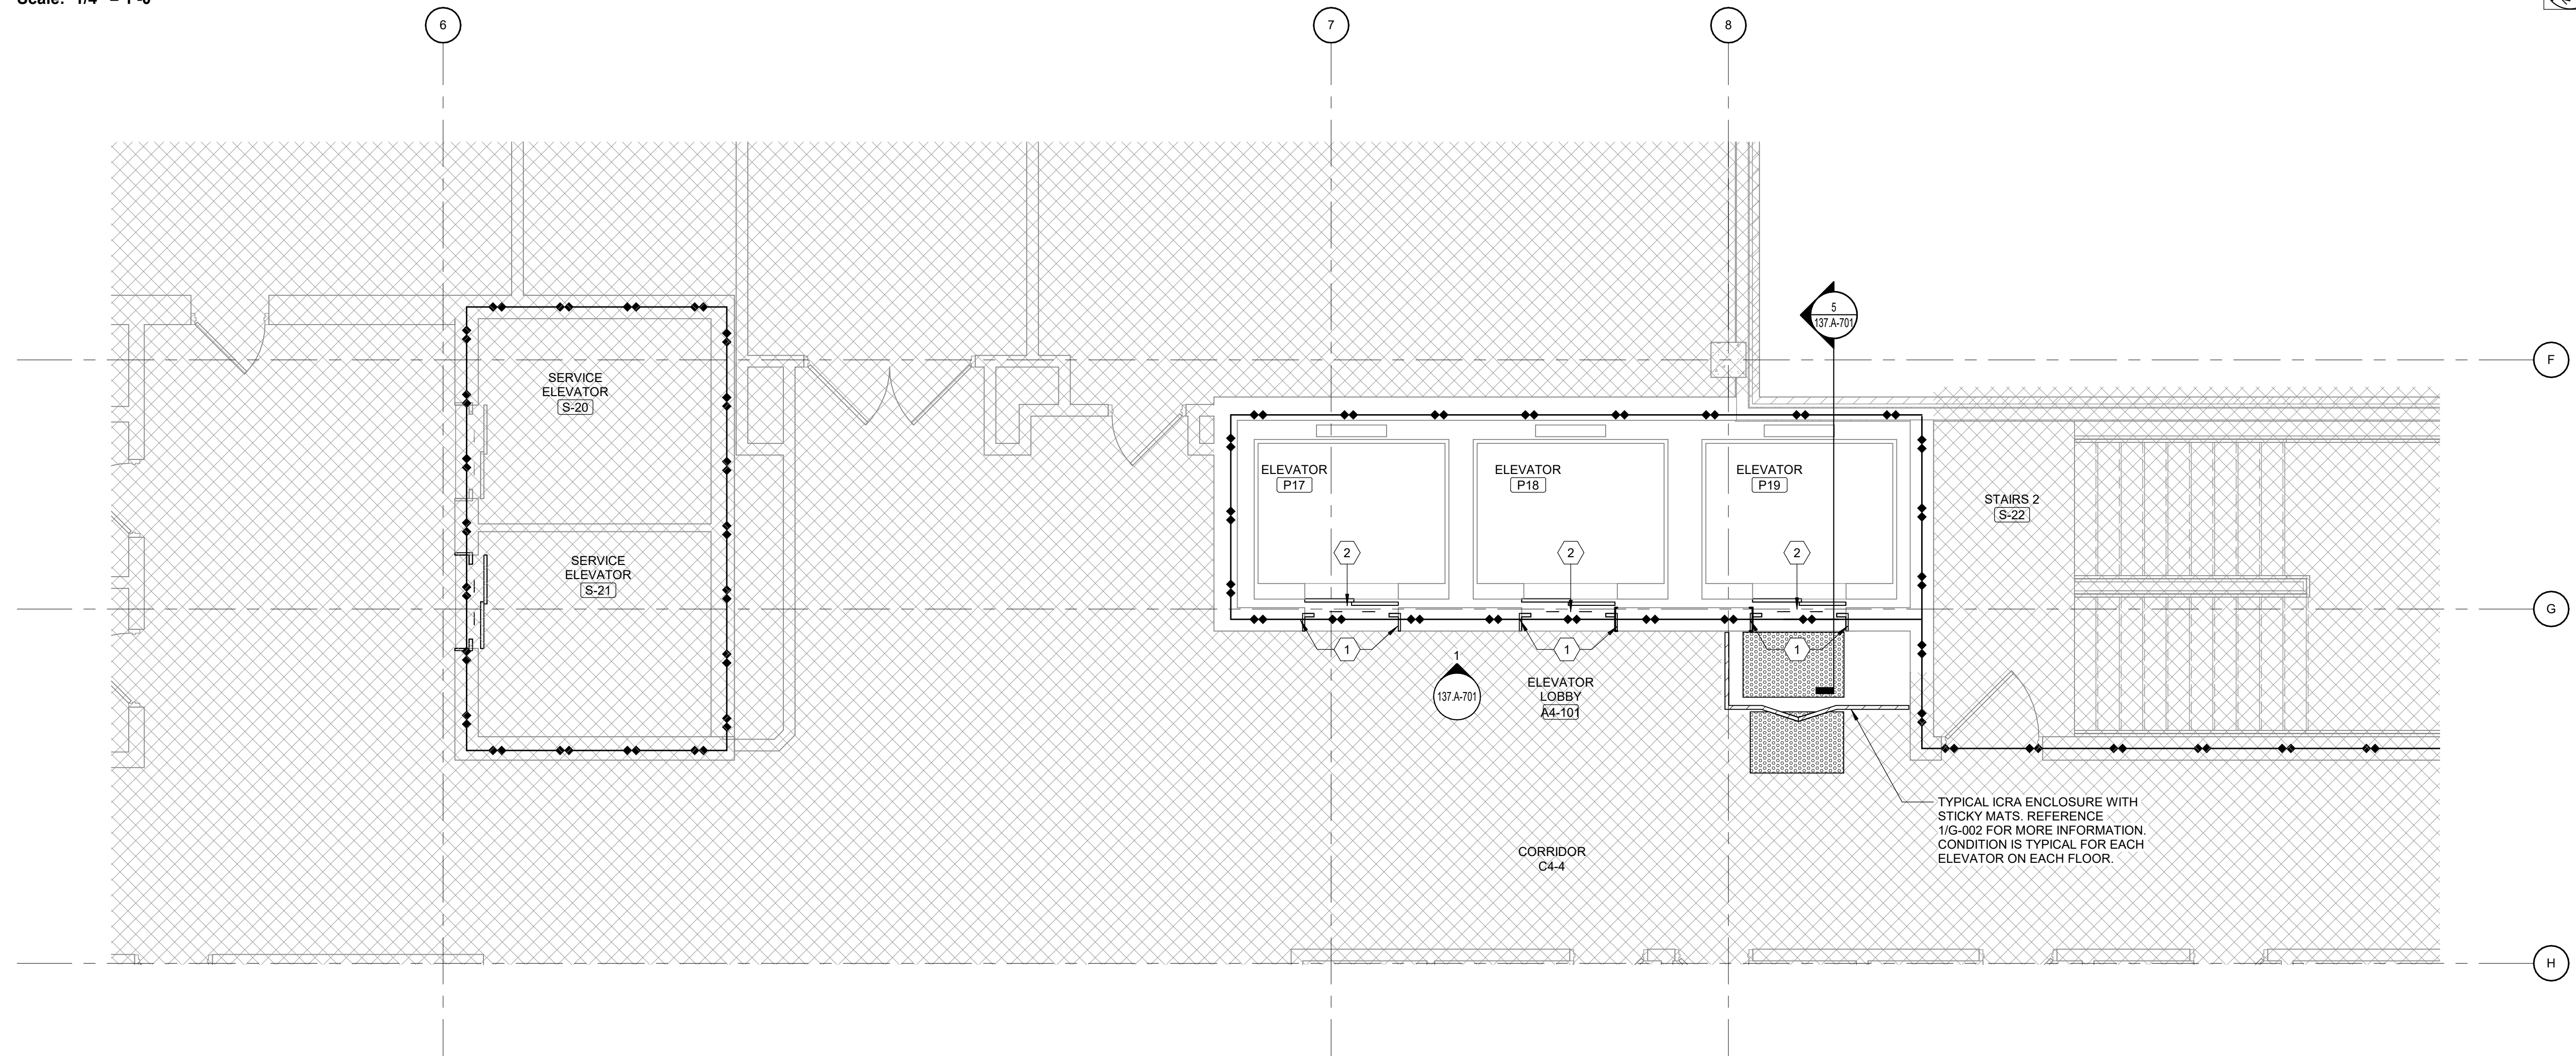

2 BUILDING 137 PARTIAL FOURTH FLOOR PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

1. REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
2. REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
3. REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
4. THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
5. NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
6. CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.
7. NO WORK ON ELEVATOR SYSTEM TO BE COMPLETED PRIOR TO DELIVERY OF ALL COMPONENTS AND EQUIPMENT. ONCE ELEVATOR IS REMOVED FROM SERVICE FOR THE MODERNIZATION, CONTRACTOR TO CONTINUALLY MAN THE ELEVATOR MODERNIZATION WITH QUALIFIED ELEVATOR CREW ON THE NORMAL WORKING DAYS.

KEY NOTES:

1. REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
2. NEW STAINLESS STEEL HOISTWAY DOORS.


ICRA LEGEND

- PLASTIC SHEET ICRA BARRIER
- ZIPPER DOOR
- STICKY MATS

NEW WORK LEGEND

- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN
- EXISTING WINDOW TO REMAIN
- NEW WALL
- NEW DOOR
- NEW WINDOW
- NOT IN PROJECT SCOPE

KEY PLAN

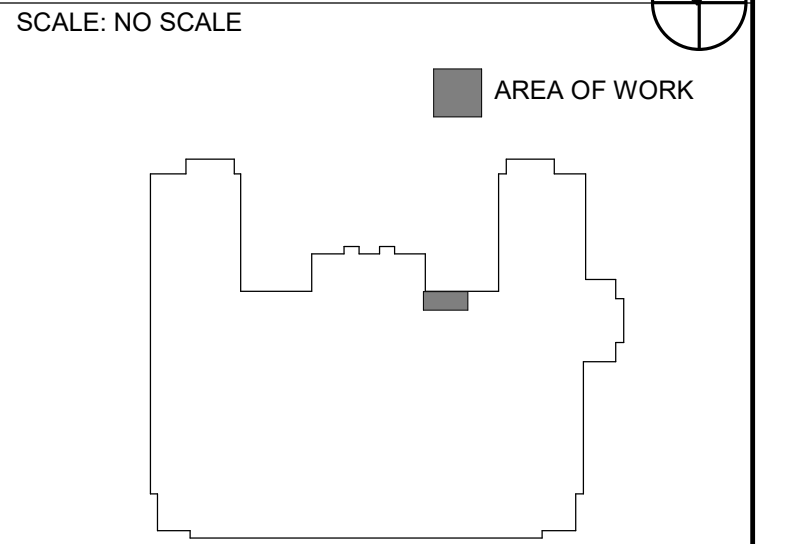


WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

**FULLY SPRINKLERED
100% BID DOCUMENTS**

CONSULTANTS:		
#	Revisions:	Date

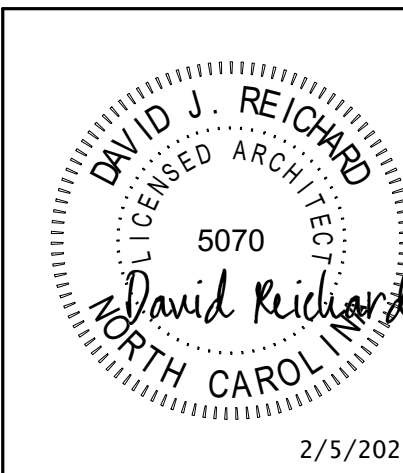

PROJECT MANAGER

ACG Project Number 21-344

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511

APOGEE
Engineers | Architects
www.acg-pa.com 919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.


Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans Affairs

Drawing Title BUILDING 137 PARTIAL FLOOR PLANS - P17-P19	Location TUSCALOOSA VAMC
--	------------------------------------

Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137	Approved
Date FEBRUARY 6, 2025	Checked DJR
	Drawn LBB

VA PROJECT NUMBER 679-22-100
Building Number 137
Drawing Number 137.A-101
Dwg 13 of 21

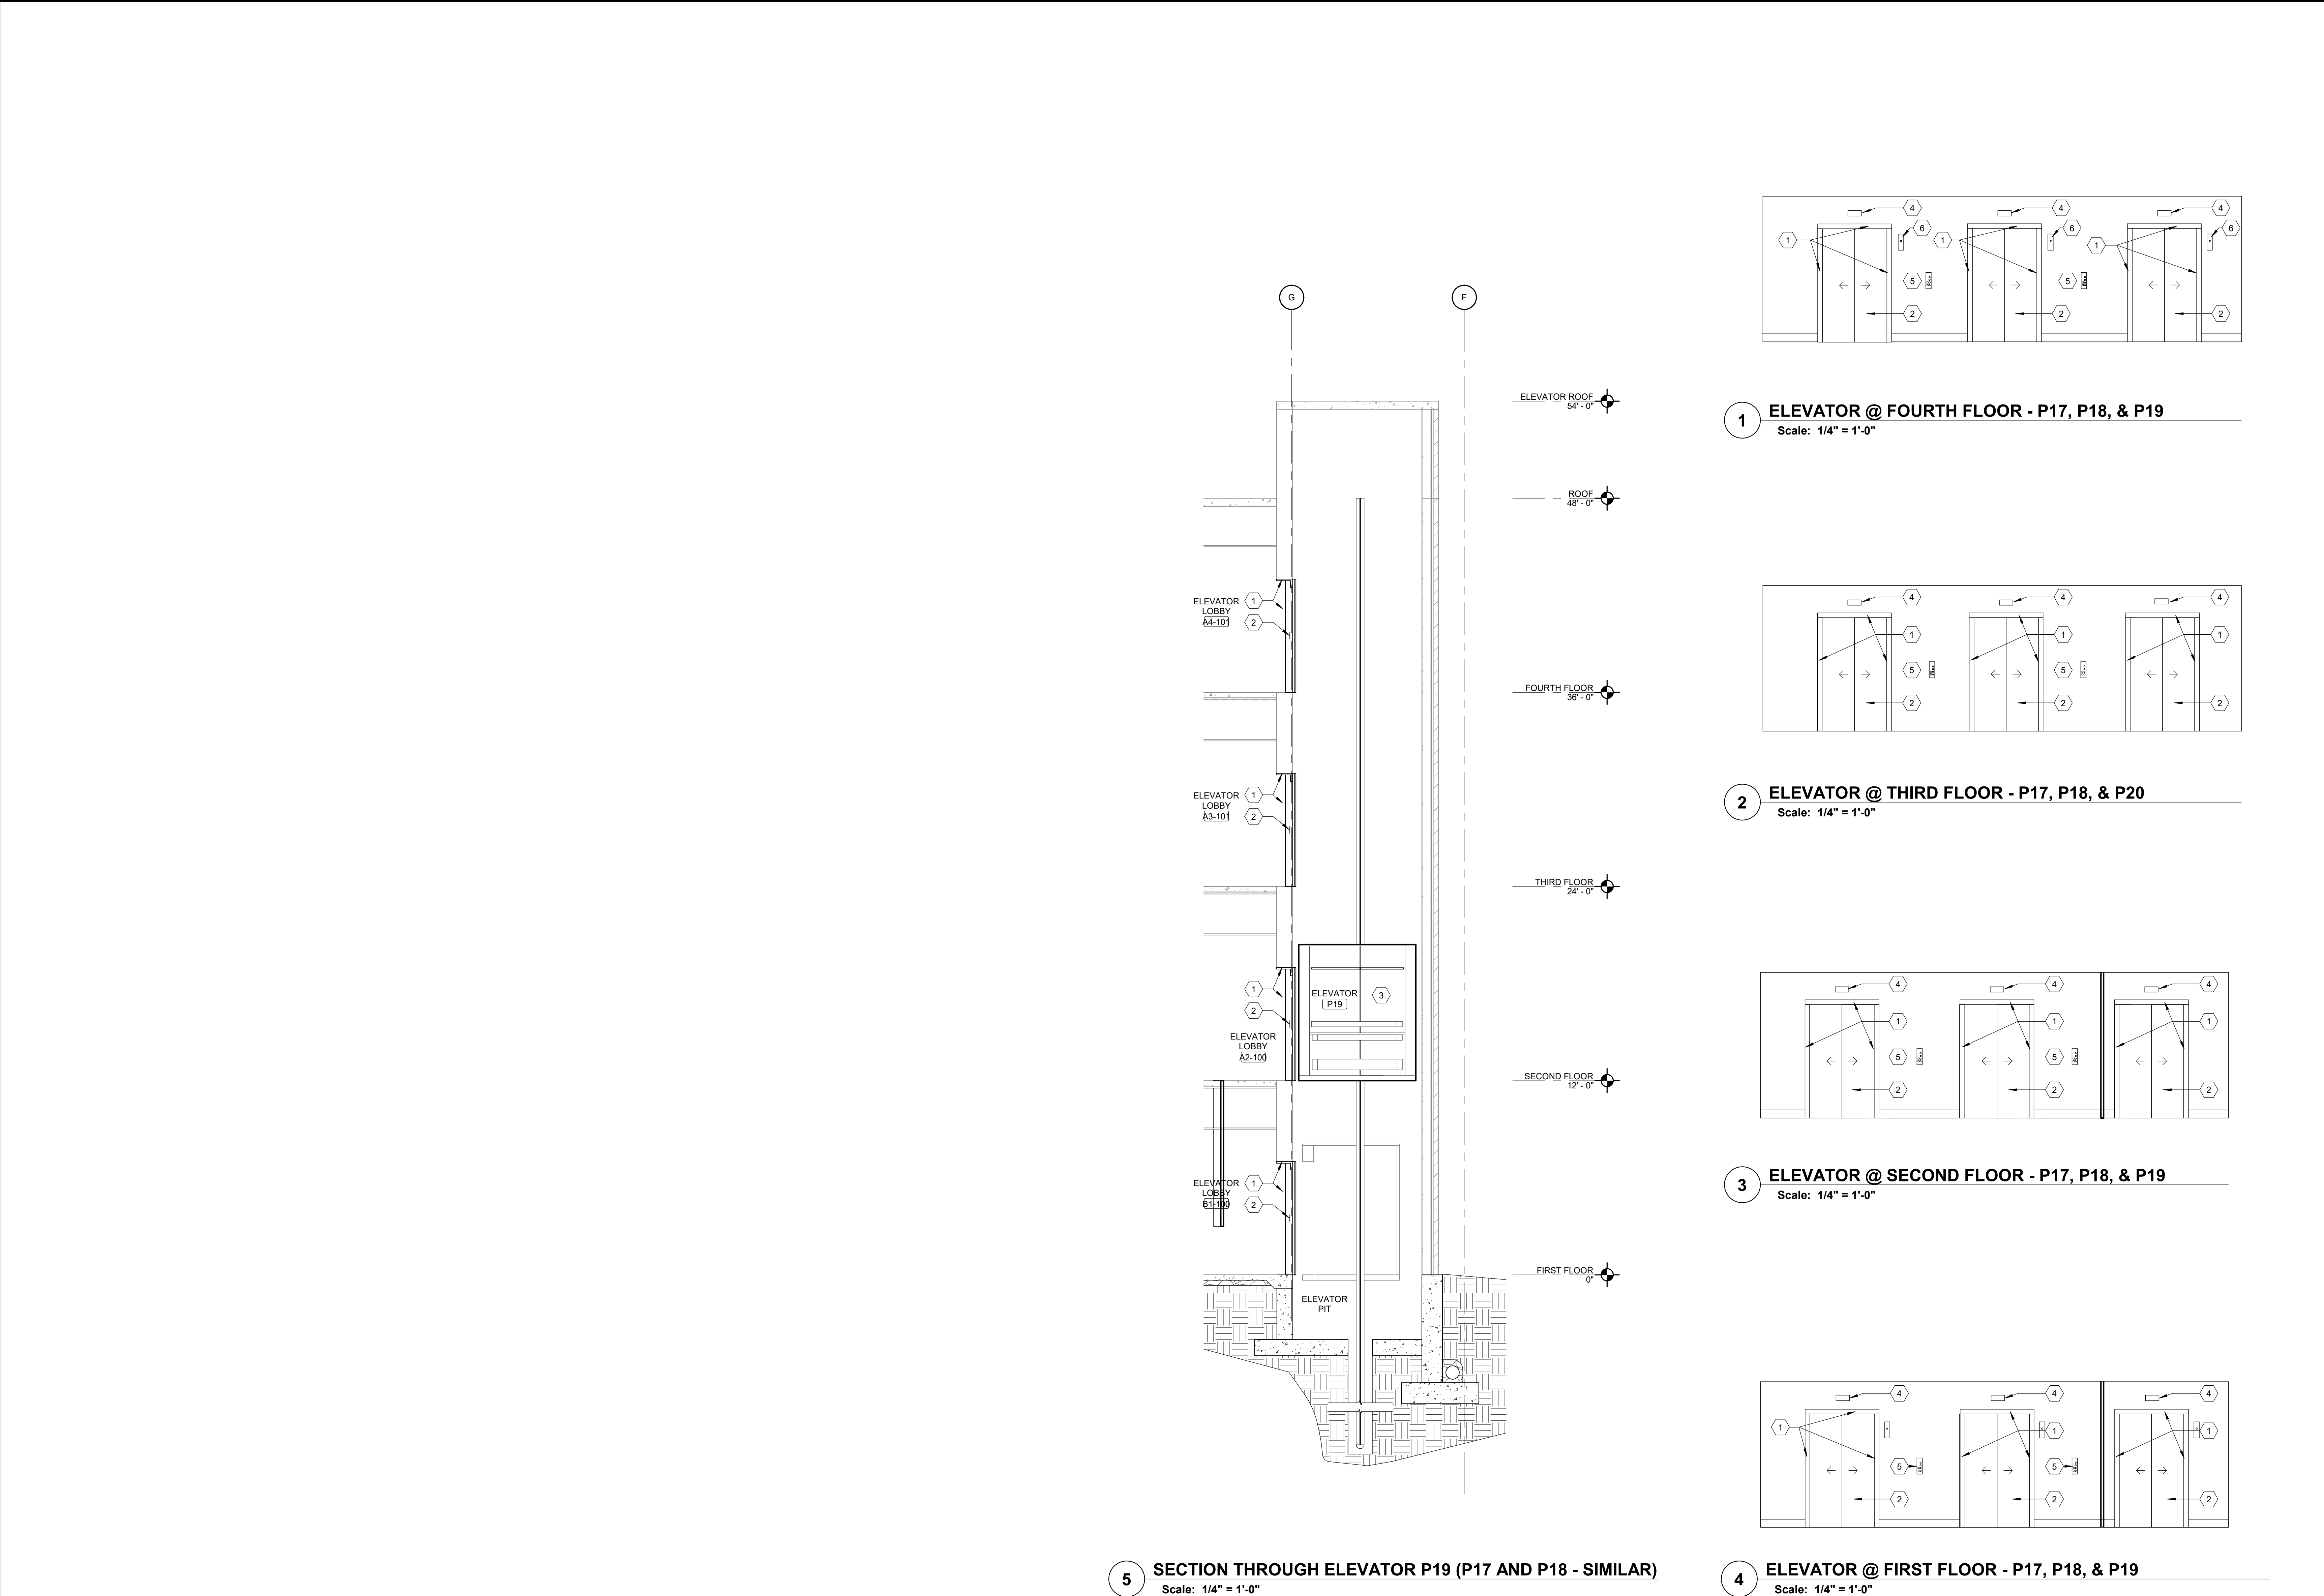

SHEET NOTES:

1. REFER TO SHEET A-001 FOR PARTITION TYPES AND DETAILS.
2. REFER TO SHEET G-002 FOR ICRA BARRIER WALL TYPES AND DETAILS.
3. REFER TO SHEET A-601 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.
4. REFER TO PLUMBING, ELECTRICAL, MECHANICAL, FIRE PROTECTION AND TECHNOLOGY DRAWINGS FOR ADDITIONAL INFORMATION NOT SHOWN ON THIS PLAN.
5. THE CONTRACTOR IS RESPONSIBLE TO COORDINATE THE WORK OF TRADES PRIOR TO THE START OF CONSTRUCTION.
6. NOTIFY THE COR AND THE ARCHITECT OF ANY DISCREPANCIES IN THE DRAWINGS AND SPECS PRIOR TO THE START OF WORK.
7. CONTRACTOR TO MODIFY EXISTING OPENINGS FOR NEW REPLACEMENT CALL BUTTONS, HALL LANTERNS, ETC. EQUIPMENT BY PATCHING AND/OR REPAIRING SURROUNDING FINISHES TO MATCH EXISTING.
8. ONLY ONE ELEVATOR IN EACH GROUP SHALL BE WORKED ON. IF ANY WORK REQUIRING SHUTDOWN OF POWER, LOSS OF GROUP OPERATION, OR ALL ELEVATORS IN THE BANK TO BE OUT OF SERVICE, WORK SHALL BE CONDUCTED AFTER HOURS AS DETERMINED BY THE VA.
9. PROVIDE PROPER SAFETY SHROUDING BETWEEN ELEVATORS 17-20 PRIOR TO STARTING MODERNIZATION. UPON THE COMPLETION OF THE MODERNIZATION OF ELEVATORS 17-20, CONTRACTOR TO REMOVE SHROUDING.

KEY NOTES:

- 1 REFINISH STAINLESS STEEL ENTRANCE FRAME AT HEAD AND BOTH JAMBS.
- 2 NEW STAINLESS STEEL HOISTWAY DOORS.
- 3 PROVIDE NEW ELEVATOR INTERIOR FINISHES, CONTROL PANELS, ETC. FOR COMPLETE INSTALLATION. SEE A-806.
- 4 NEW FLOOR INDICATOR.
- 5 NEW CALL BUTTONS, EXISTING BACK BOXES TO REMAIN
- 6 NEW EMERGENCY ACCESS PANEL.

FULLY SPRINKLERED
100% BID DOCUMENTS

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--


ROOM FINISH LEGEND										
BUILDING #	ELEVATOR/ROOM #	FLOOR	BASE	WALLS				CEILING FINISH		REMARKS
				EAST	NORTH	SOUTH	WEST			
1	PASSENGER P1 & P2	LVT-1	SS	SS & HIW	SS & HIW	SS & HIW	SS & HIW	SS		
1	MECH PENTHOUSE P001	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		
2	PASSENGER P3	LVT-1	SS	SS & HIW	SS & HIW	SS & HIW	SS & HIW	SS		
2	ELEV. PENTHOUSE 100	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		
2	ELEV. MACHINE PENTHOUSE 101	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		
5	PASSENGER P13	LVT-1	SS	SS & HIW	SS & HIW	SS & HIW	SS & HIW	SS		
5	ELEVATOR MACHINE ROOM 9A	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		
38	PASSENGER P6 & P7	LVT-1	SS	SS & HIW	SS & HIW	SS & HIW	SS & HIW	SS		
38	ELEVATOR MACHINE ROOM B04	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		
135	PASSENGER P14 & P15	LVT-1	SS	SS & HIW	SS & HIW	SS & HIW	SS & HIW	SS		
135	ELEVATOR MACHINE B-01	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		
137	PASSENGER P18, P19 & P20	LVT-1	SS	SS & HIW	SS & HIW	SS & HIW	SS & HIW	SS		
137	PASSENGER ELEVATOR COPT ROOM A1-103A	EFP-1	RB-1	P-1	P-1	P-1	P-1	EXP		

FINISH LEGEND			PROVIDE FINISHES LISTED AS BASIS OF DESIGN OR APPROVED EQUAL
PAINT	P-1	SHERWIN WILLIAMS, TBD	
PAINT	P-2	SHERWIN WILLIAMS, TBD	
RUBBER BASE	RB-1	TARKETT, BLACK	
HIGH IMPACT WALLCOVERING	HIW-1	INPRO, SMOOTH BRONZE, 5E027	
HIGH IMPACT WALLCOVERING	HIW-2	INPRO, RICOCHET, RC-STR-R610 SAFARI	
STAINLESS STEEL	SS	#4 BRUSHED STAINLESS STEEL	
LUXURY VINYL TILE	LVT-1	TARKETT, EVENT+ STONE, SLATE ESL, ROCK RIDGE 11197, 12X24	
EPOXY FLOOR PAINT	EFP-1	EPOXY PAINT/SHERWIN WILLIAMS/ARMORSEAL 100 HS HIGH SOLIDS, HEAVY DUTY TWO COMPONENT EPOXY COATING WITH SKID INHIBITING ADDITIVE/COLOR TO BE GREY THROUGHOUT WITH SAFETY YELLOW AT EQUIPMENT PADS	
HANDRAILS	STAINLESS STEEL, INPRO ASCEND, 4" FLAT WITH TURNED-IN ENDS		
CRASH RAIL	STAINLESS STEEL, INPRO ASCEND, 8" FLAT WITH TURNED-IN ENDS		
BASE	#4 SATIN STAINLESS STEEL - 18 GAUGE/304 ALLOY		
CEILING	ISLAND, LED DOWNLIGHTS, #4 BRUSHED STAINLESS STEEL MIRRORED FINISH, GRAIN TO RUN FRONT OF CAB TO REAR		
NOTE: ELEVATOR CONTROLS PER ELEVATOR SPECIFICATION DIVISION 14			


DOOR SCHEDULE													
DOOR				DOOR FRAME		HEAD	JAMB	THRESH			HDWR		
NO.	WIDTH	HEIGHT	THICK	MAT'L	ELEV	MAT'L	ELEV	DETAIL NO.	DETAIL NO.	DETAIL NO.	LBL	SET	REMARKS
BLDG 1													
SS	3'-0"	7'-0"	2"	WD	F	HM	A	H1	J1		45	SH-3	
BLDG 2													
P3	3'-0"	7'-0"	2"	WD	F	HM	A	H1	J1		45	SH-3	
BLDG 5													
9A	3'-0"	7'-0"	2"	WD	F	HM	A	H1	J1		45	SH-3	
BLDG 135													
B-01	3'-6"	7'-0"	2"	WD	F	HM	A	H1	J1		45	SH-3	

ABBREVIATIONS:


EXIST= EXISTING
HM= HOLLOW METAL
PNT= PAINT
STN= STAIN
WD= SOLID CORE WOOD

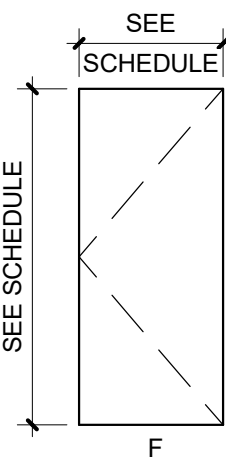

DOOR ELEVATIONS

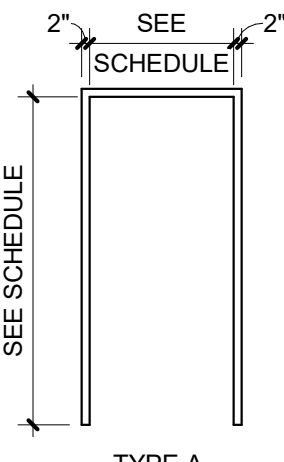


FRAME ELEVATIONS

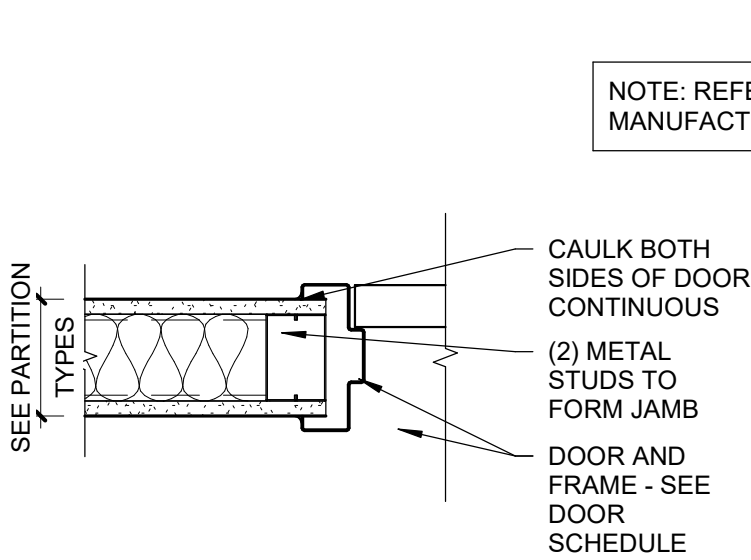

J1 JAMB DETAIL @ METAL STUD
Scale: 1 1/2" = 1'-0"


NOTE: REFER TO COLD FORM METAL MANUFACTURING FOR SHOP DRAWINGS

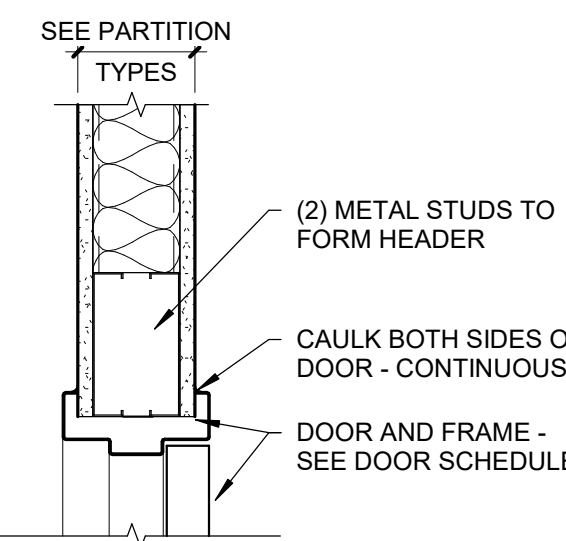


H1 HEAD DETAIL @ METAL STUD
Scale: 1 1/2" = 1'-0"

FULLY SPRINKLERED
100% BID DOCUMENTS


CONSULTANTS:			PROJECT MANAGER		ACG Project Number 21-344	Office of Construction and Facilities Management		Drawing Title DOOR SCHEDULE AND DETAILS AND ROOM FINISH SCHEDULE	Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100
			Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511			VA U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC	Approved		Building Number BLDGS 1, 2, 5, 38, 135 & 137
			www.acg-pa.com 919-858-7420					Date FEBRUARY 6, 2025	Checked DJR	Drawn LBB/ENP	Drawing Number A-601
											Dwg 15 of 21

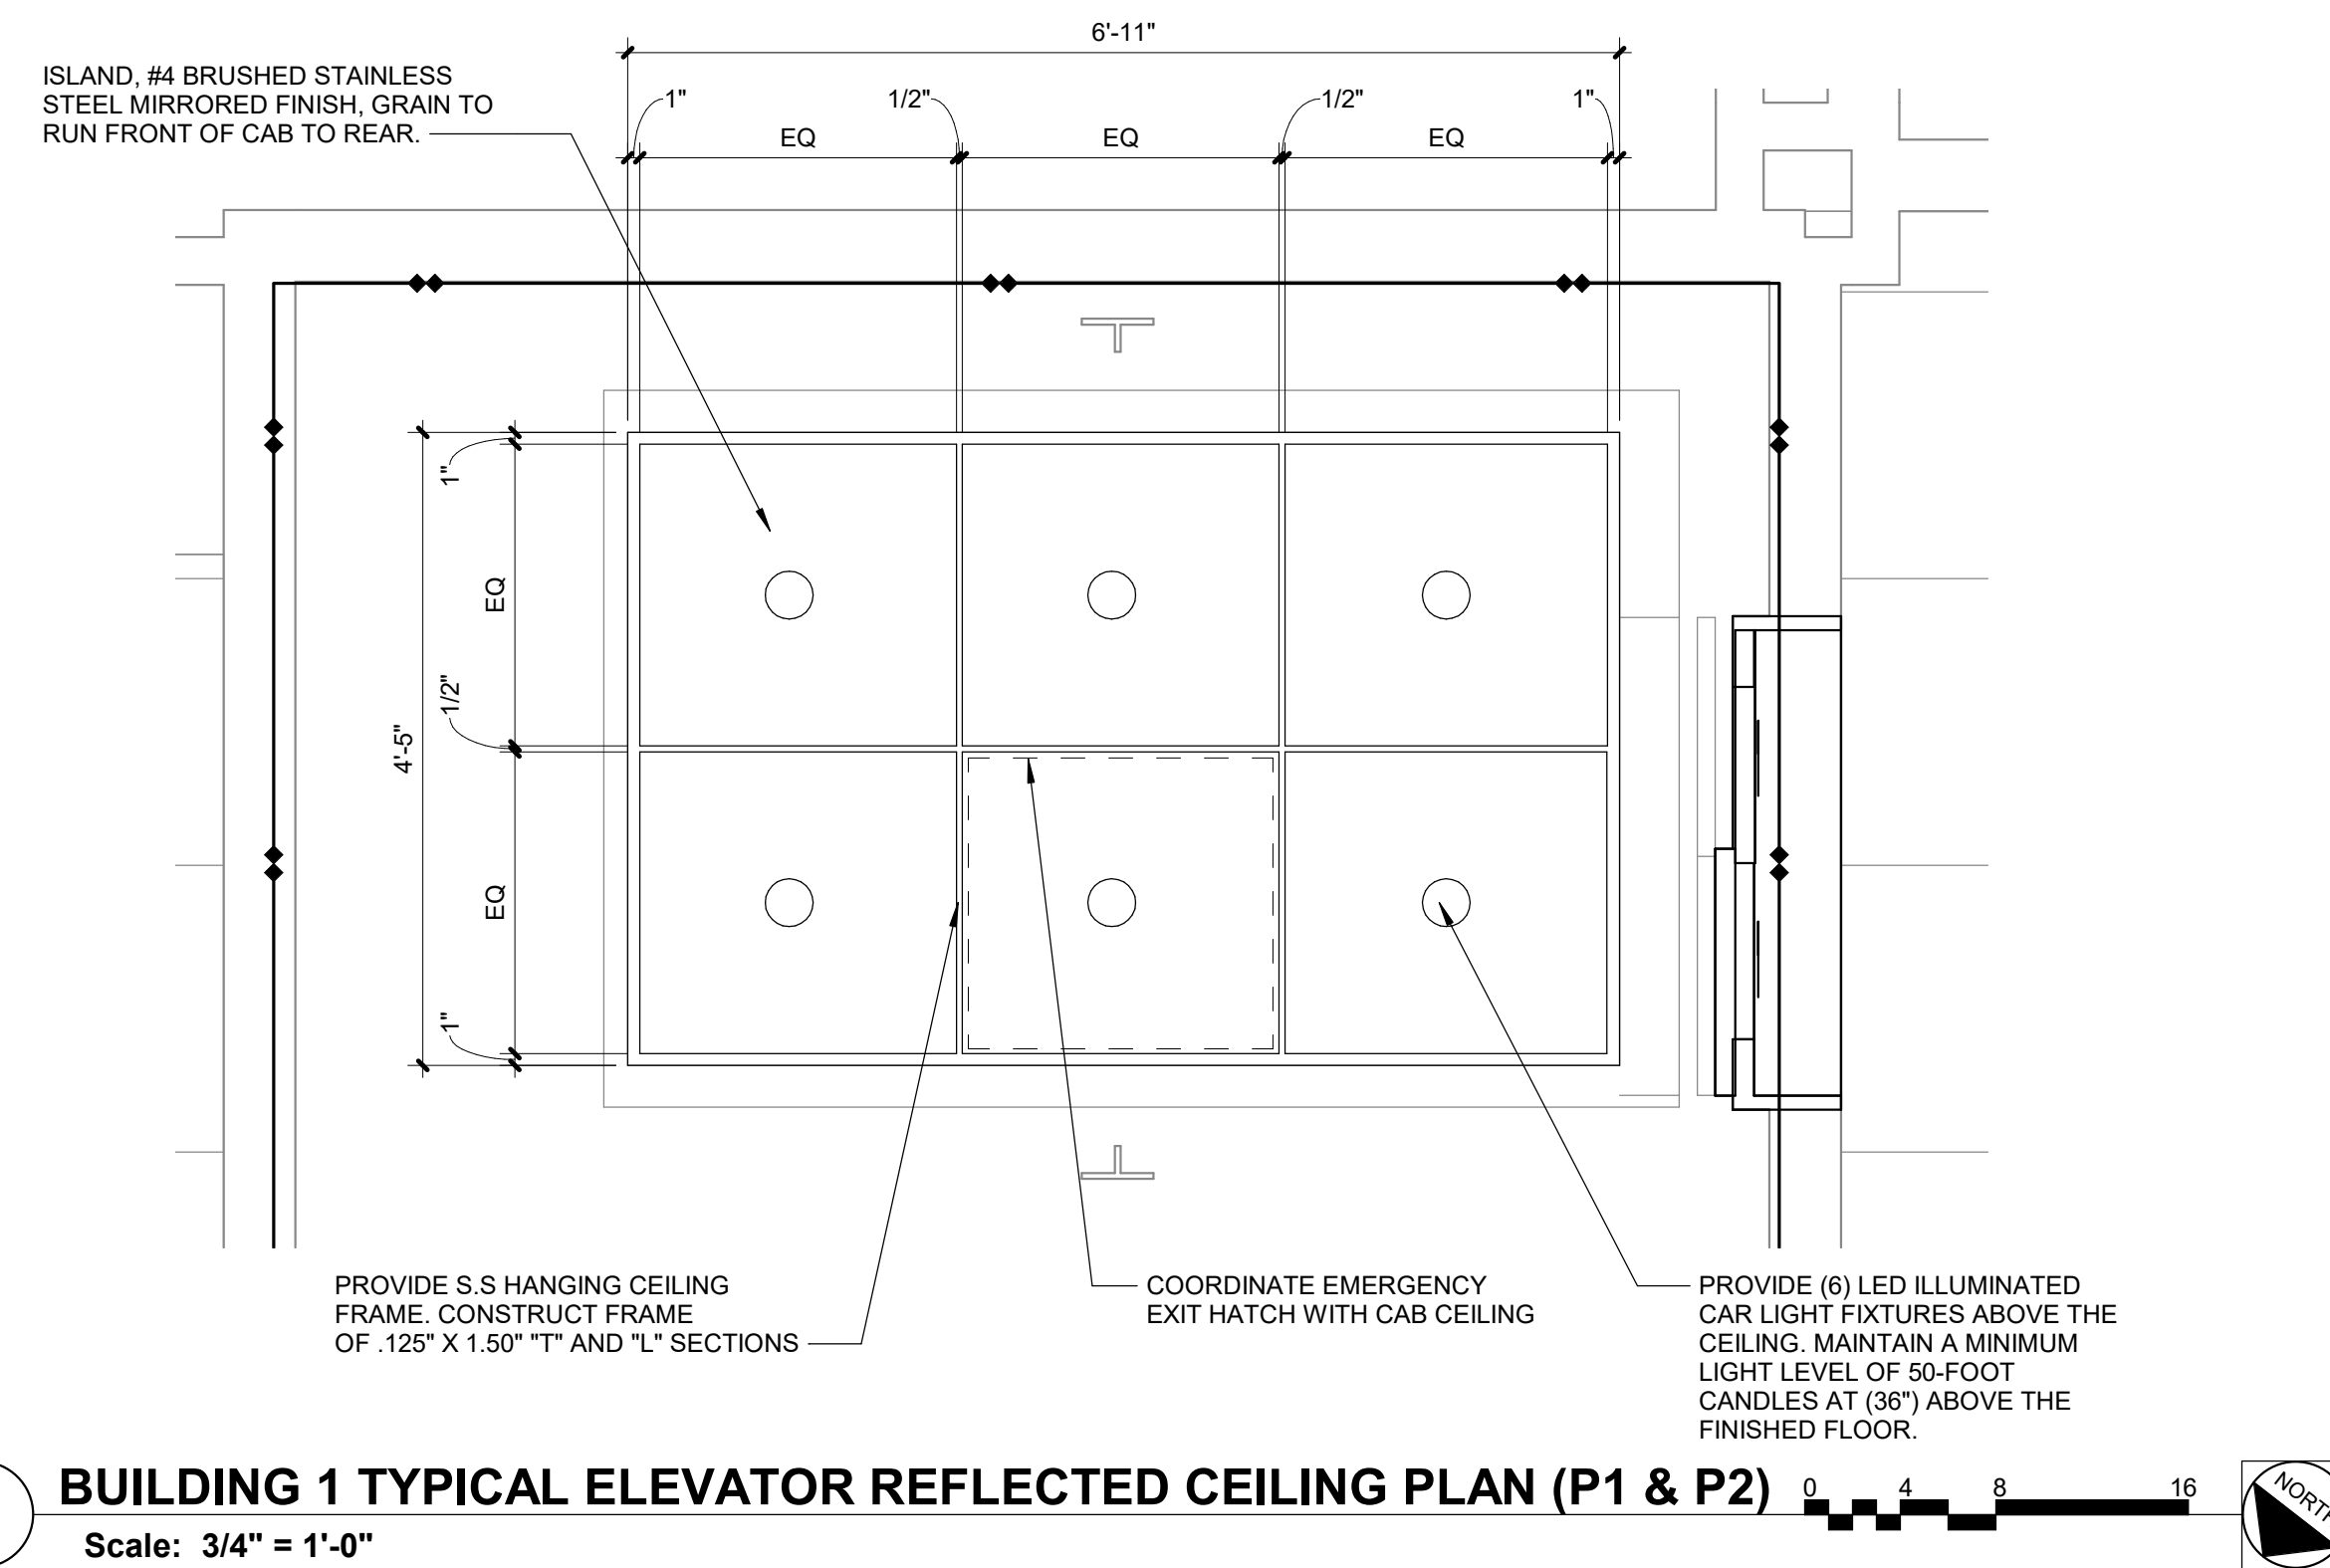


3 BUILDING 1 TYPICAL ELEVATOR REFLECTED CEILING PLAN (P1 & P2)
Scale: 3/4" = 1'-0"

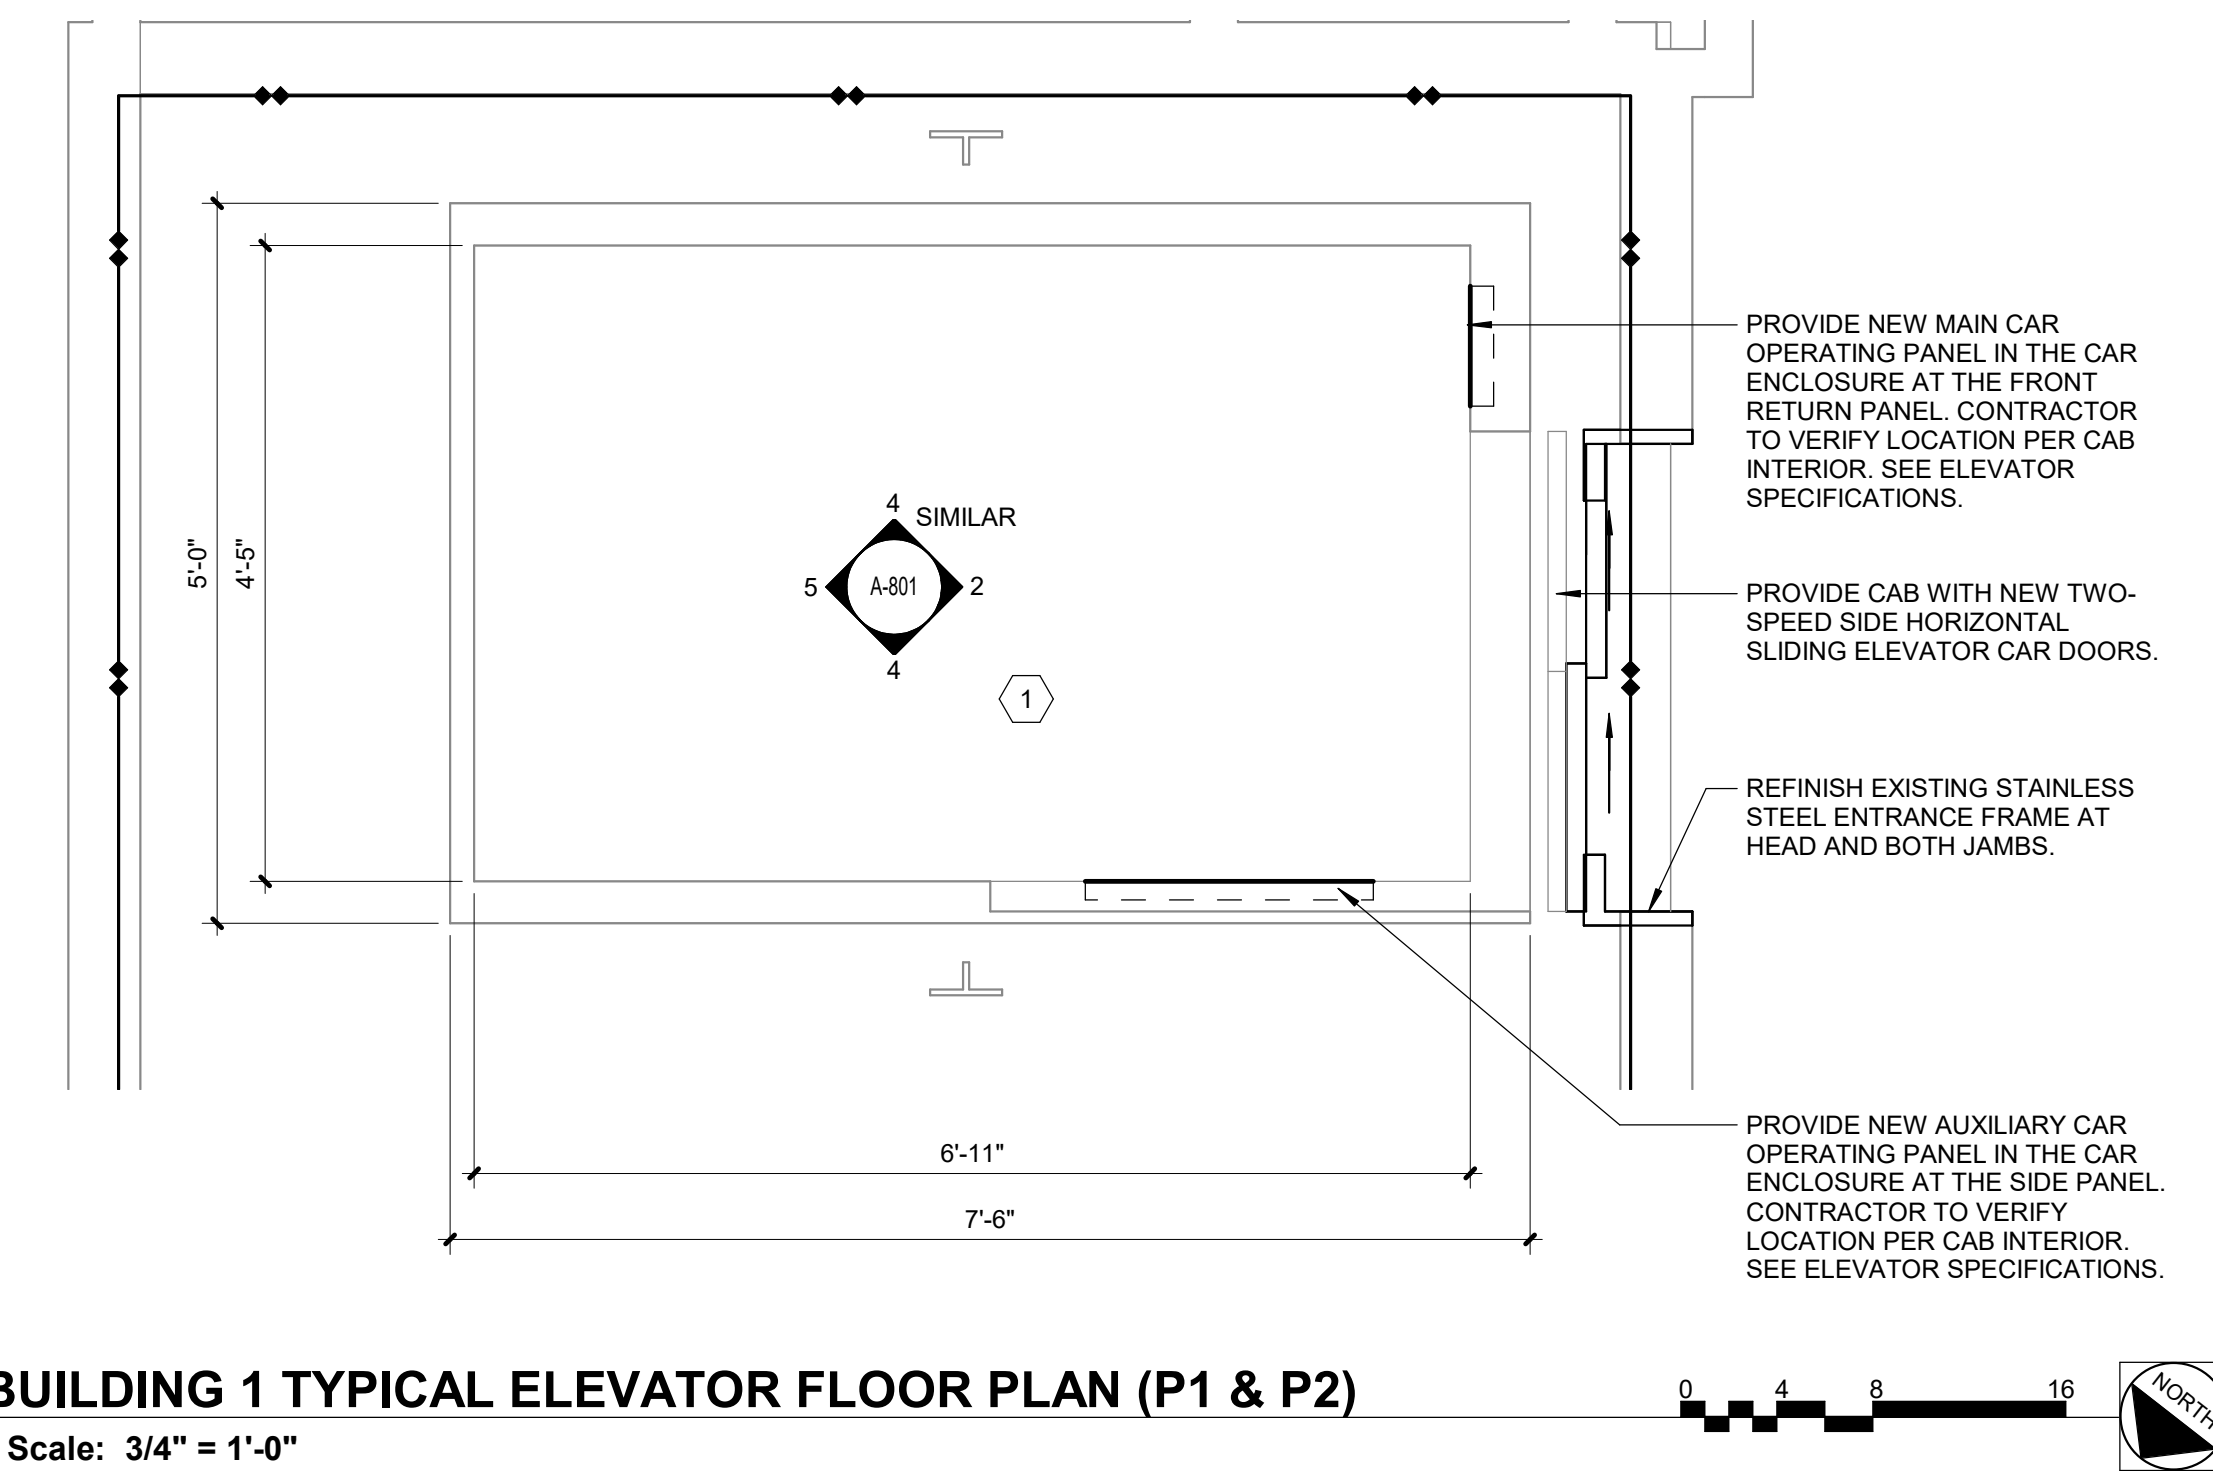


1 BUILDING 1 TYPICAL ELEVATOR FLOOR PLAN (P1 & P2)
Scale: 3/4" = 1'-0"

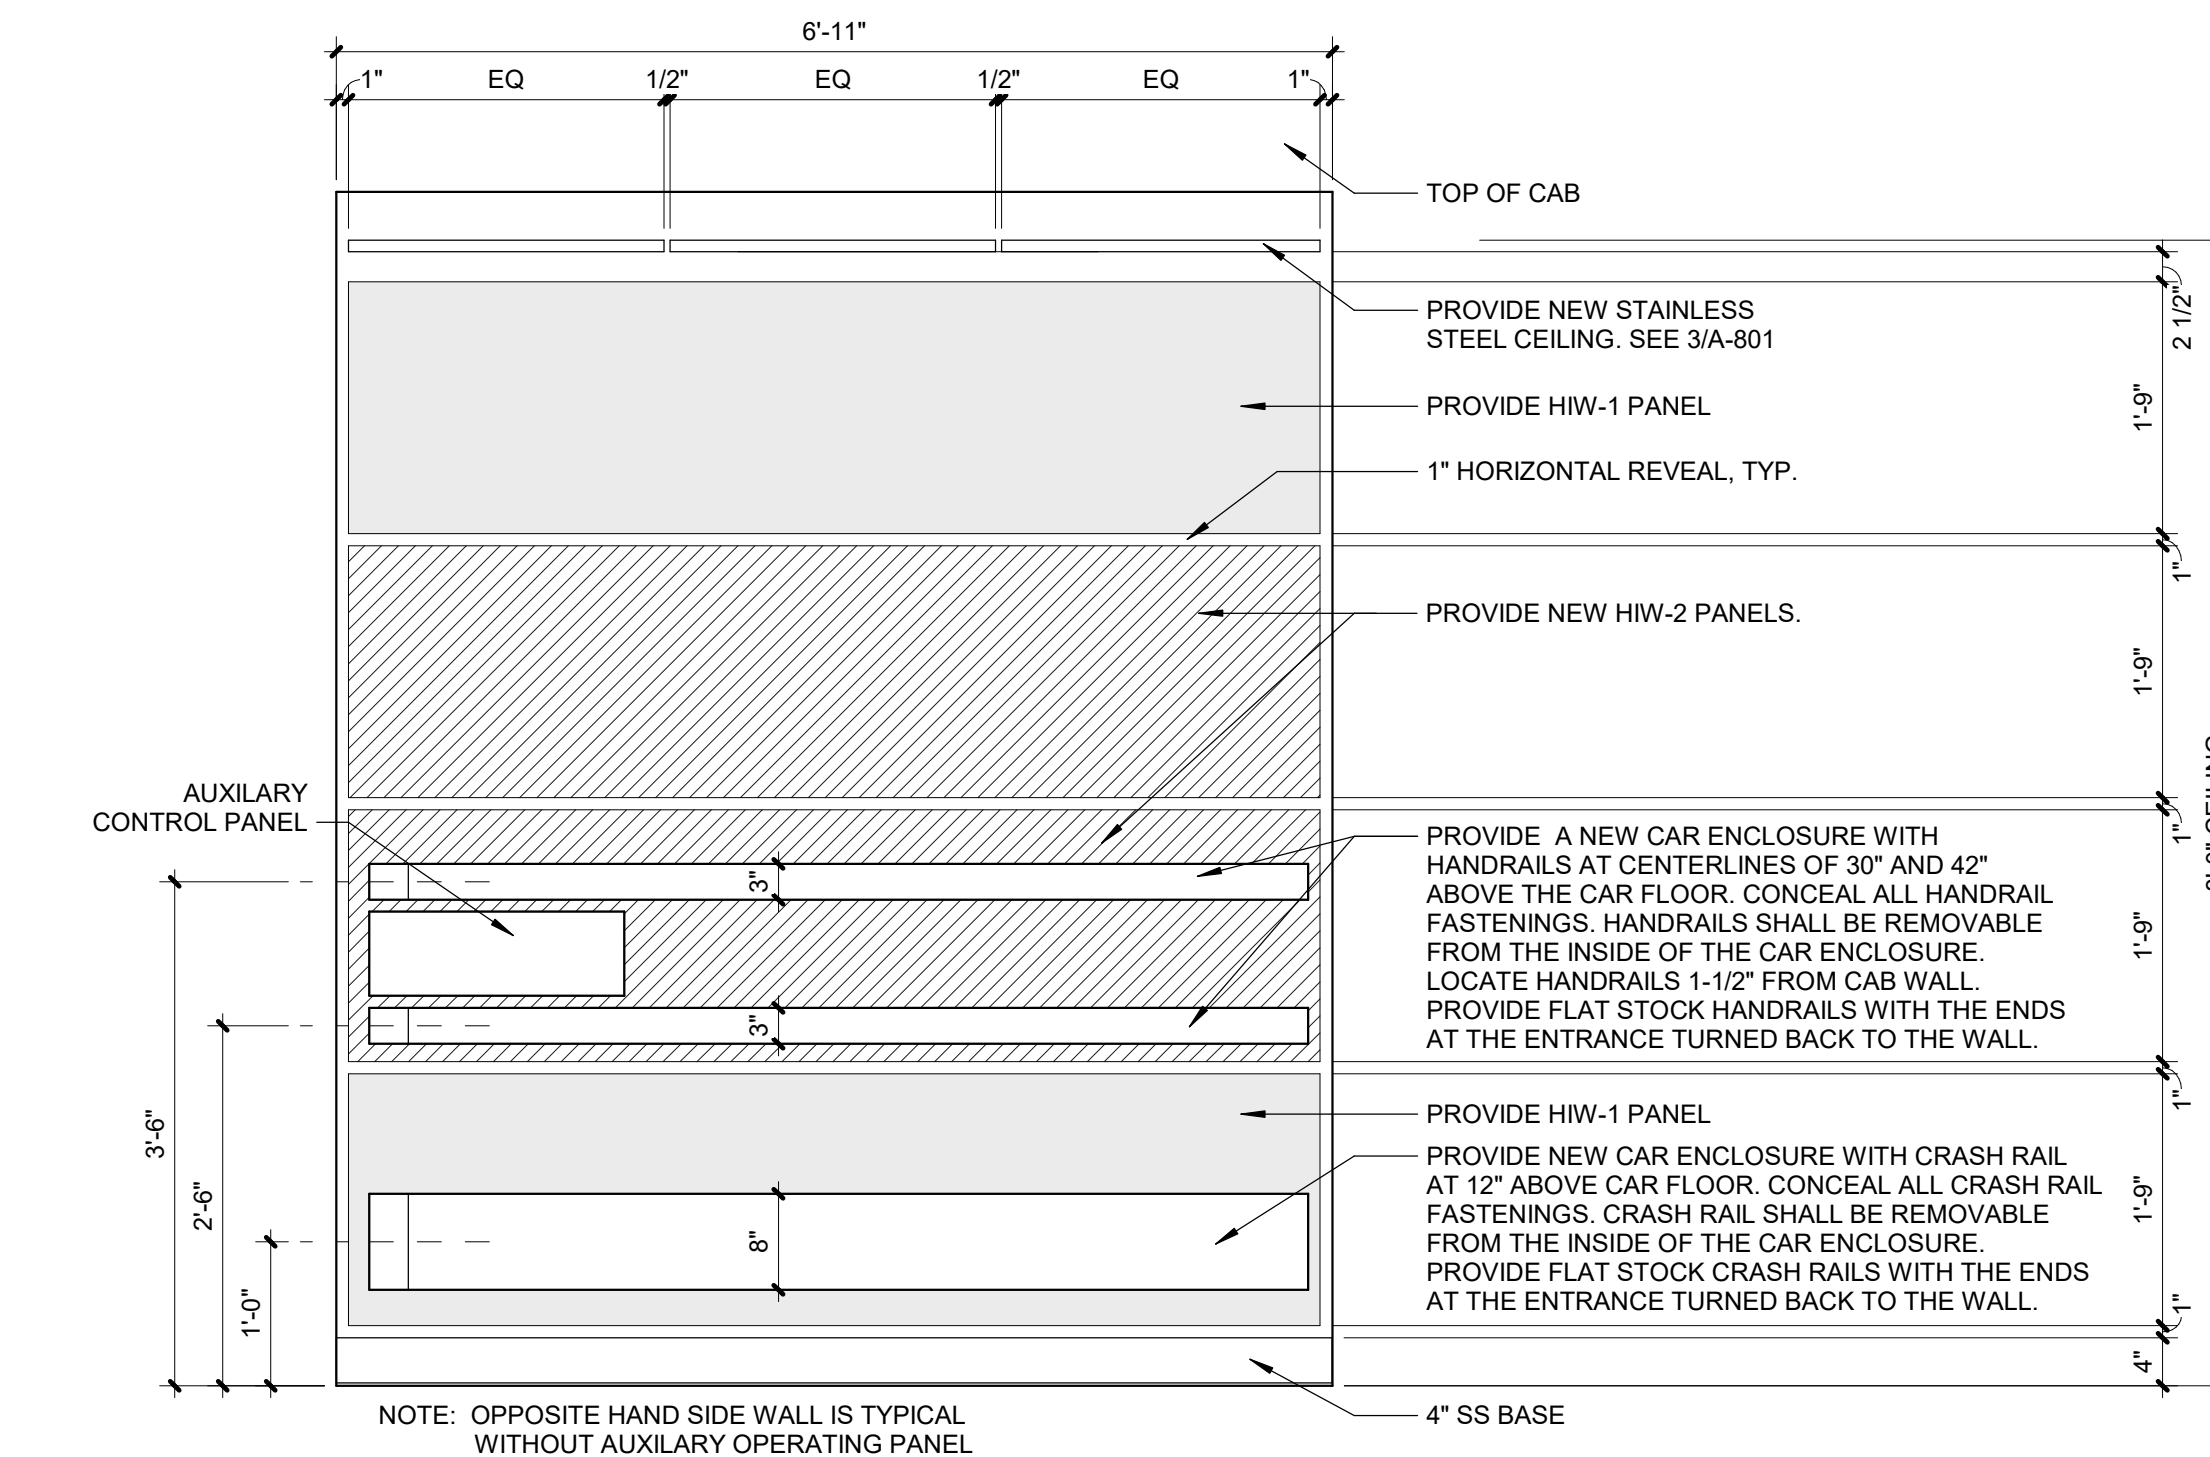

4 ELEVATOR CAB SIDE ELEVATION (P1 & P2)
Scale: 3/4" = 1'-0"

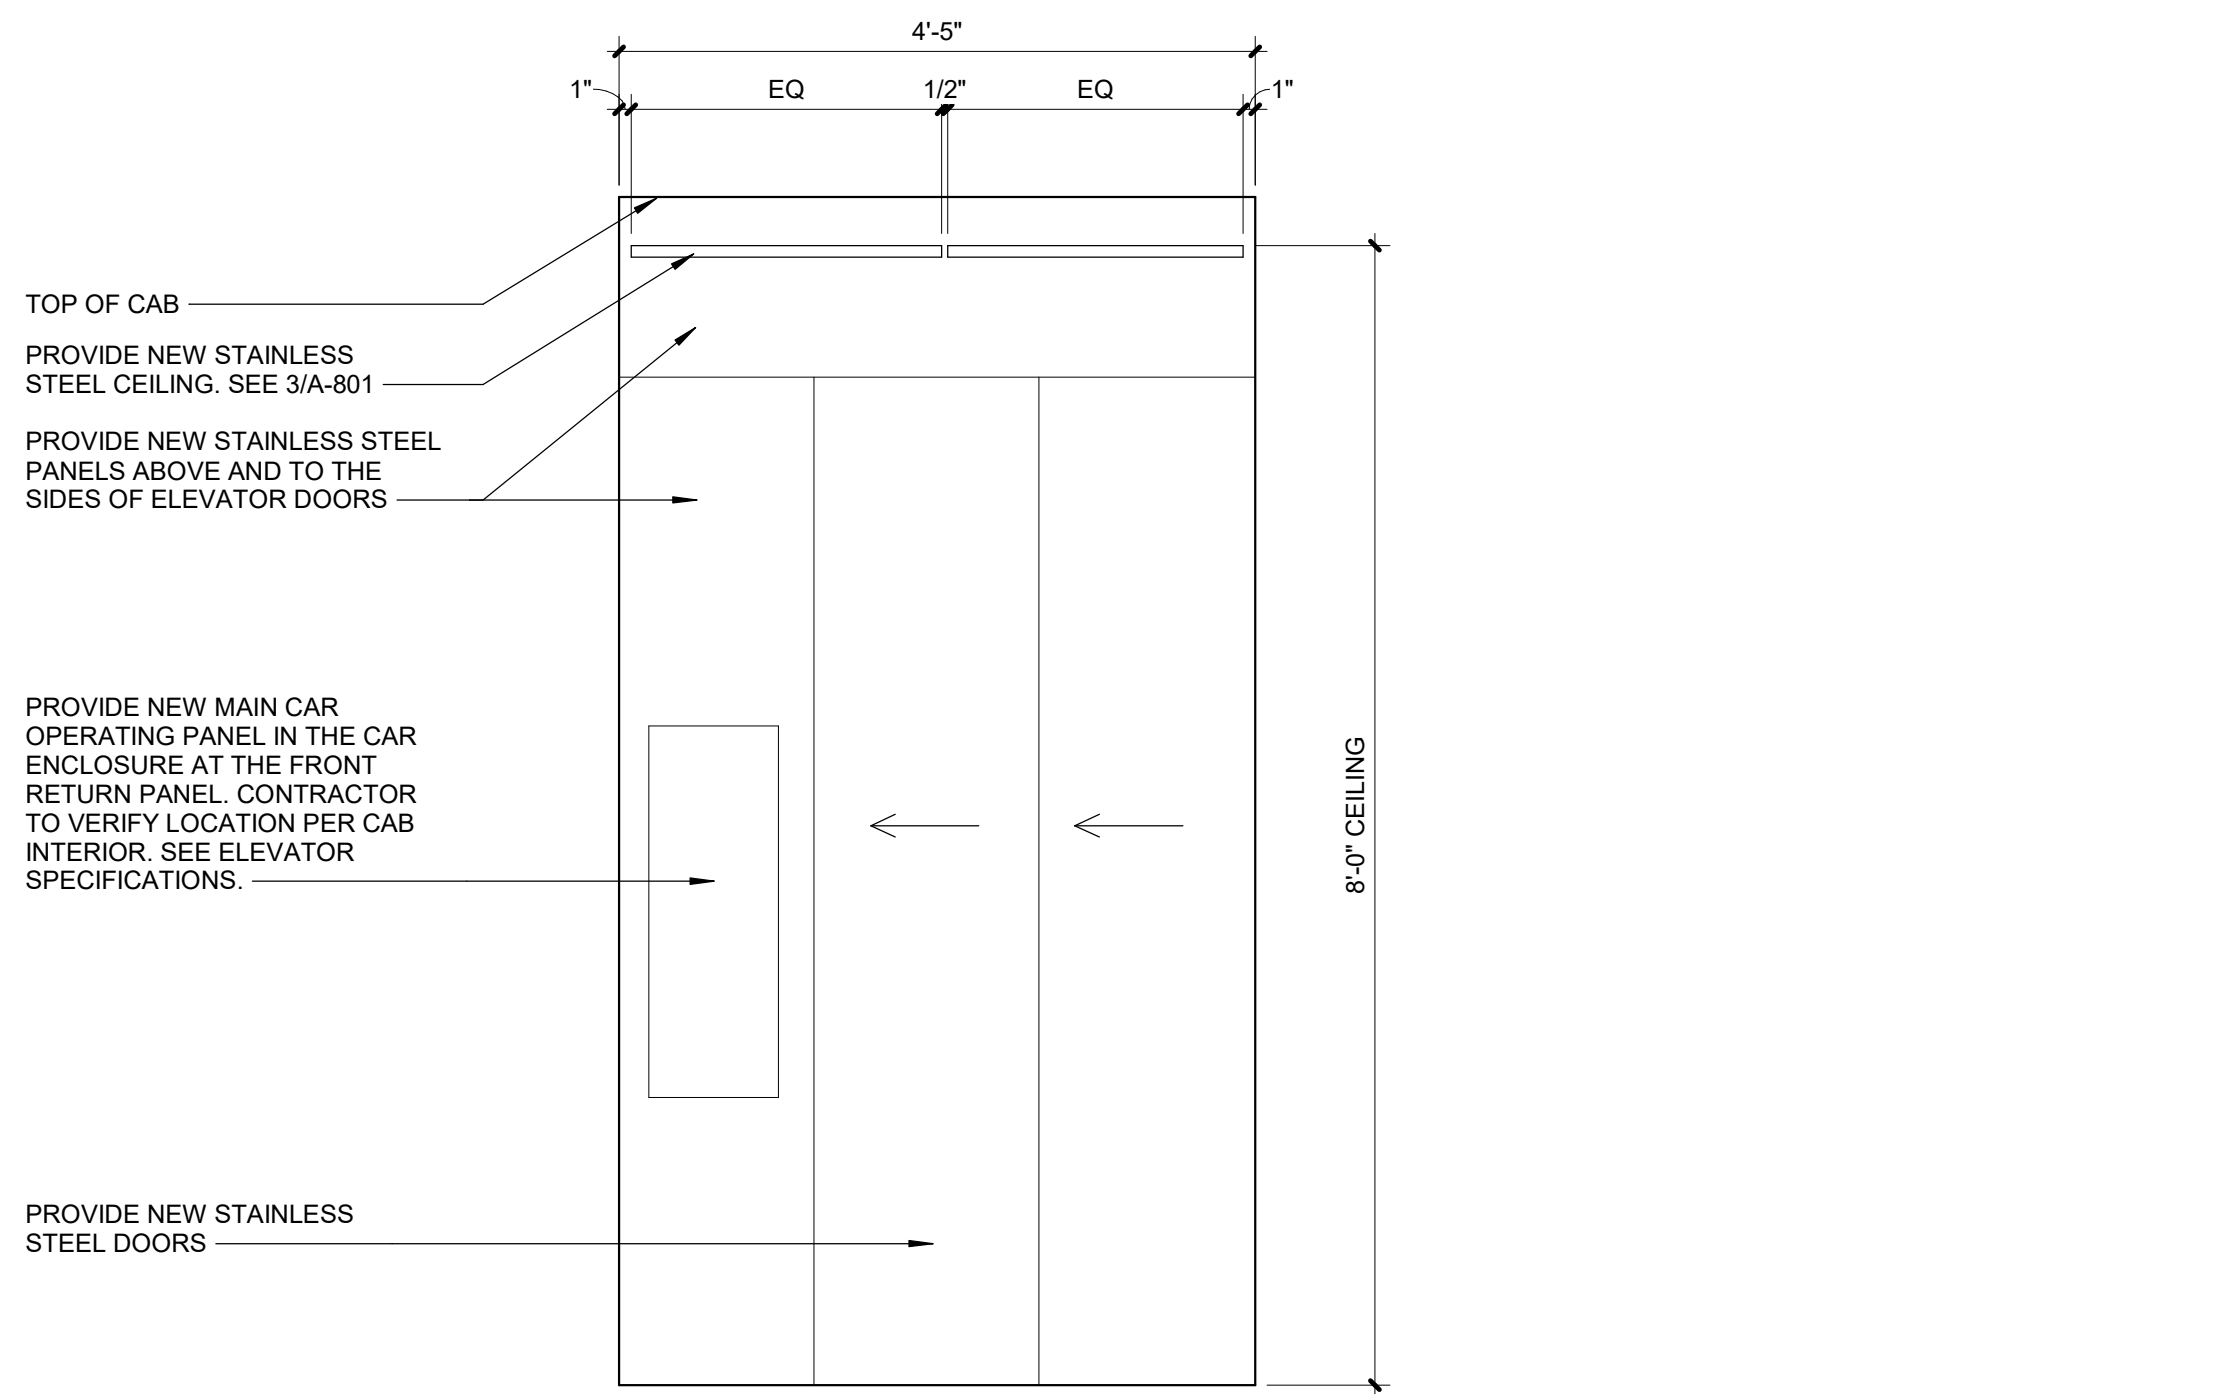


2 ELEVATOR CAB FRONT ELEVATION (P1 & P2)
Scale: 3/4" = 1'-0"

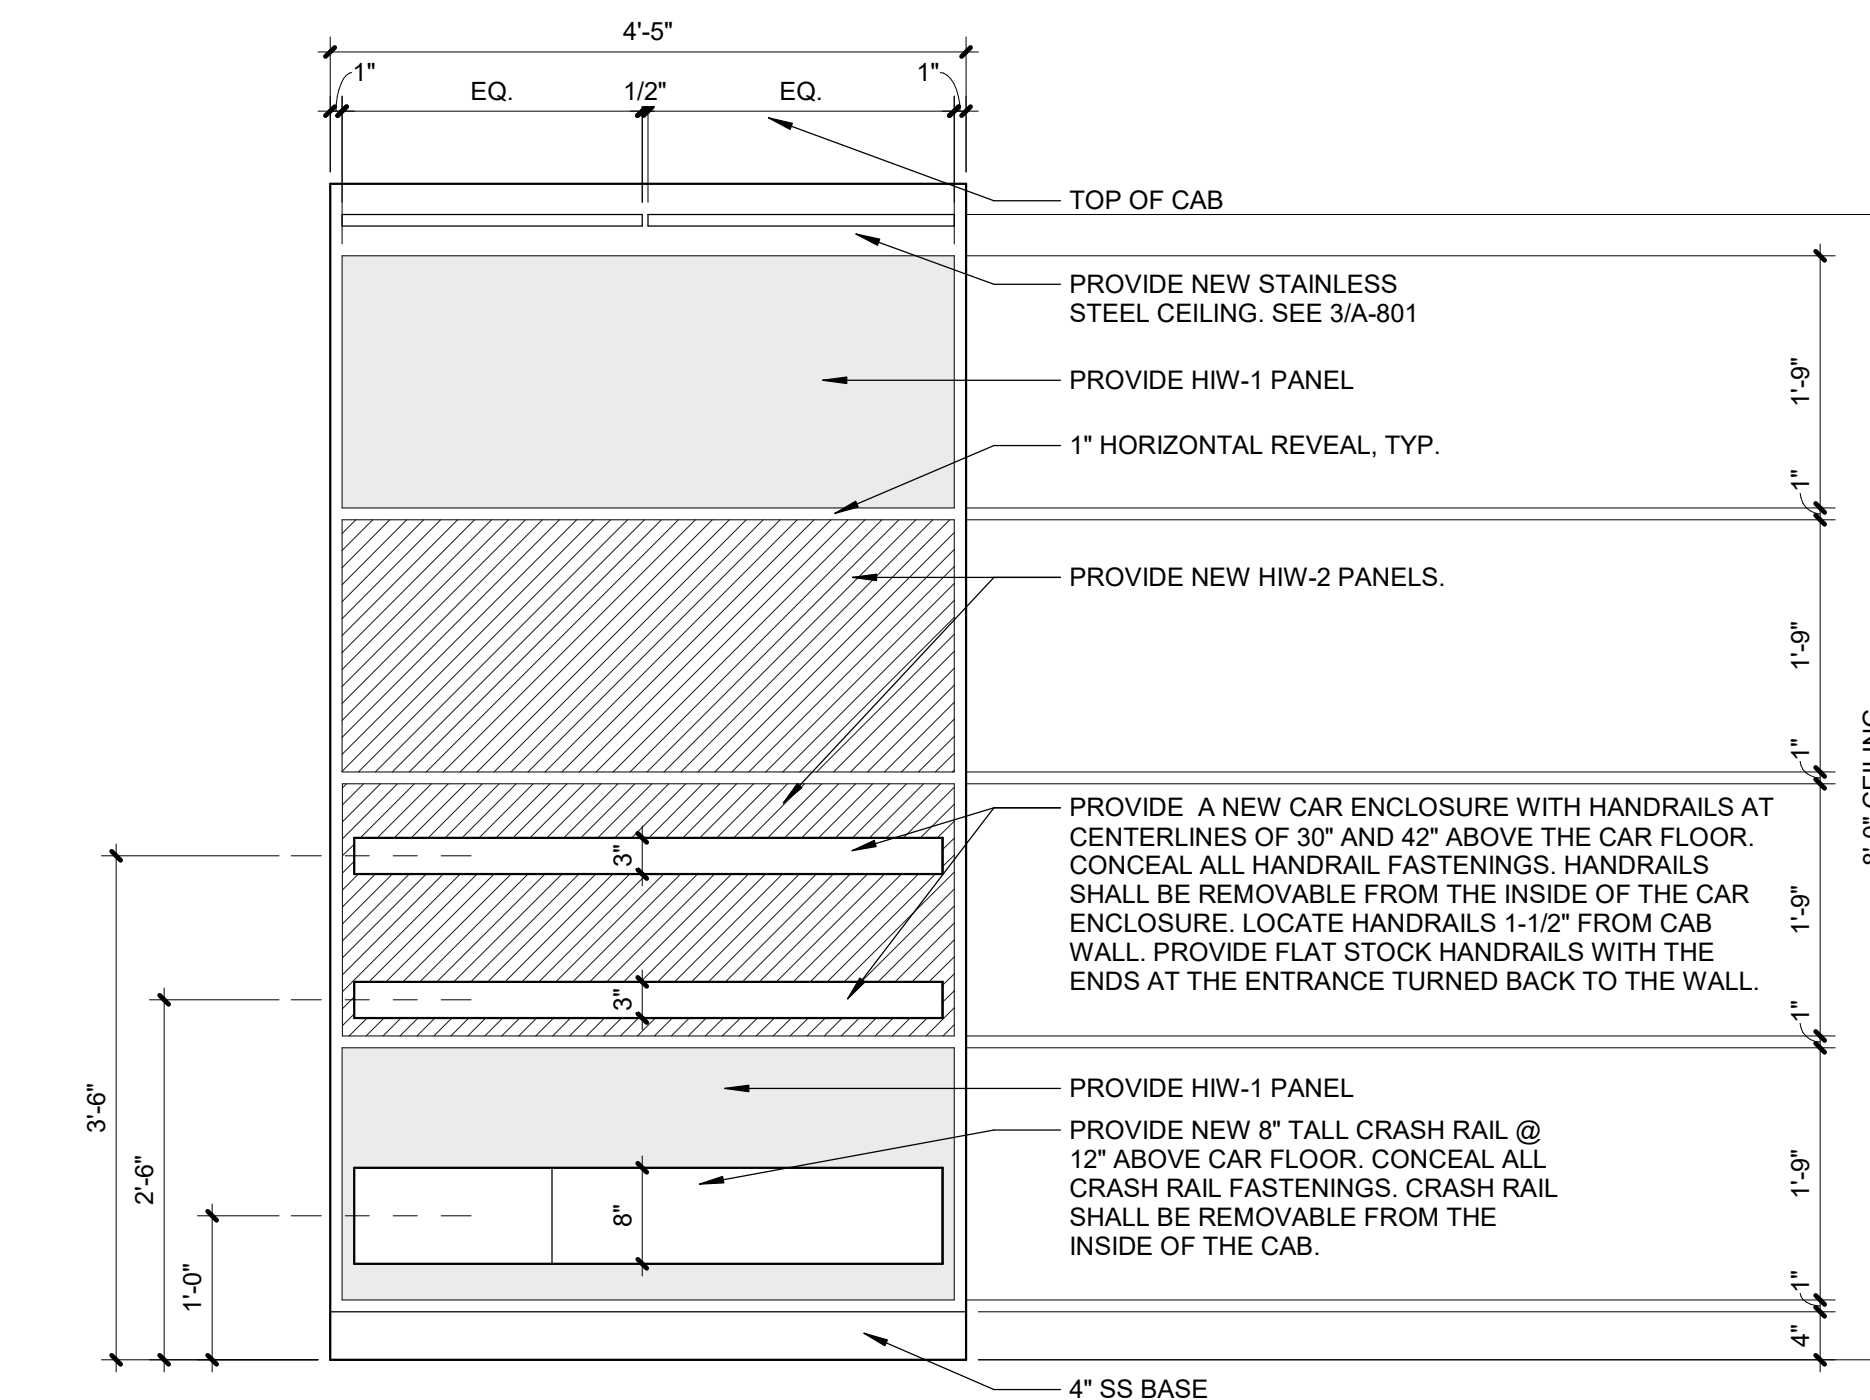


5 ELEVATOR CAB REAR ELEVATION (P1 & P2)
Scale: 3/4" = 1'-0"


★ ALTERNATE NOTES
1. DELETE ALL WORK IN BUILDING NUMBER 1

FULLY SPRINKLERED
100% BID DOCUMENTS

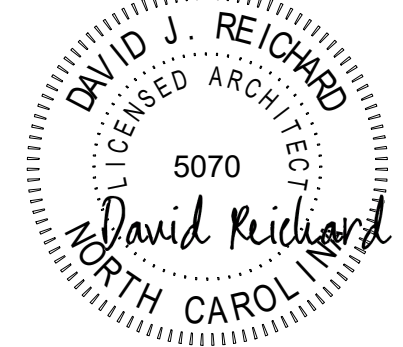
CONSULTANTS:			 52644 RALEIGH, NC		 5070 NORTH CAROLINA 2/5/2025		PROJECT MANAGER ACG Project Number 21-344  Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511 www.acg-pa.com 919-858-7420		Office of Construction and Facilities Management  U.S. Department of Veterans Affairs		Drawing Title BLDG 1 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS Location TUSCALOOSA VAMC		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137 Approved Date FEBRUARY 6, 2025 Checked JK Drawn KJC/ENP		VA PROJECT NUMBER 679-22-100 Building Number 1 Drawing Number A-801 Dwg 16 of 21	
#	Revisions:	Date														

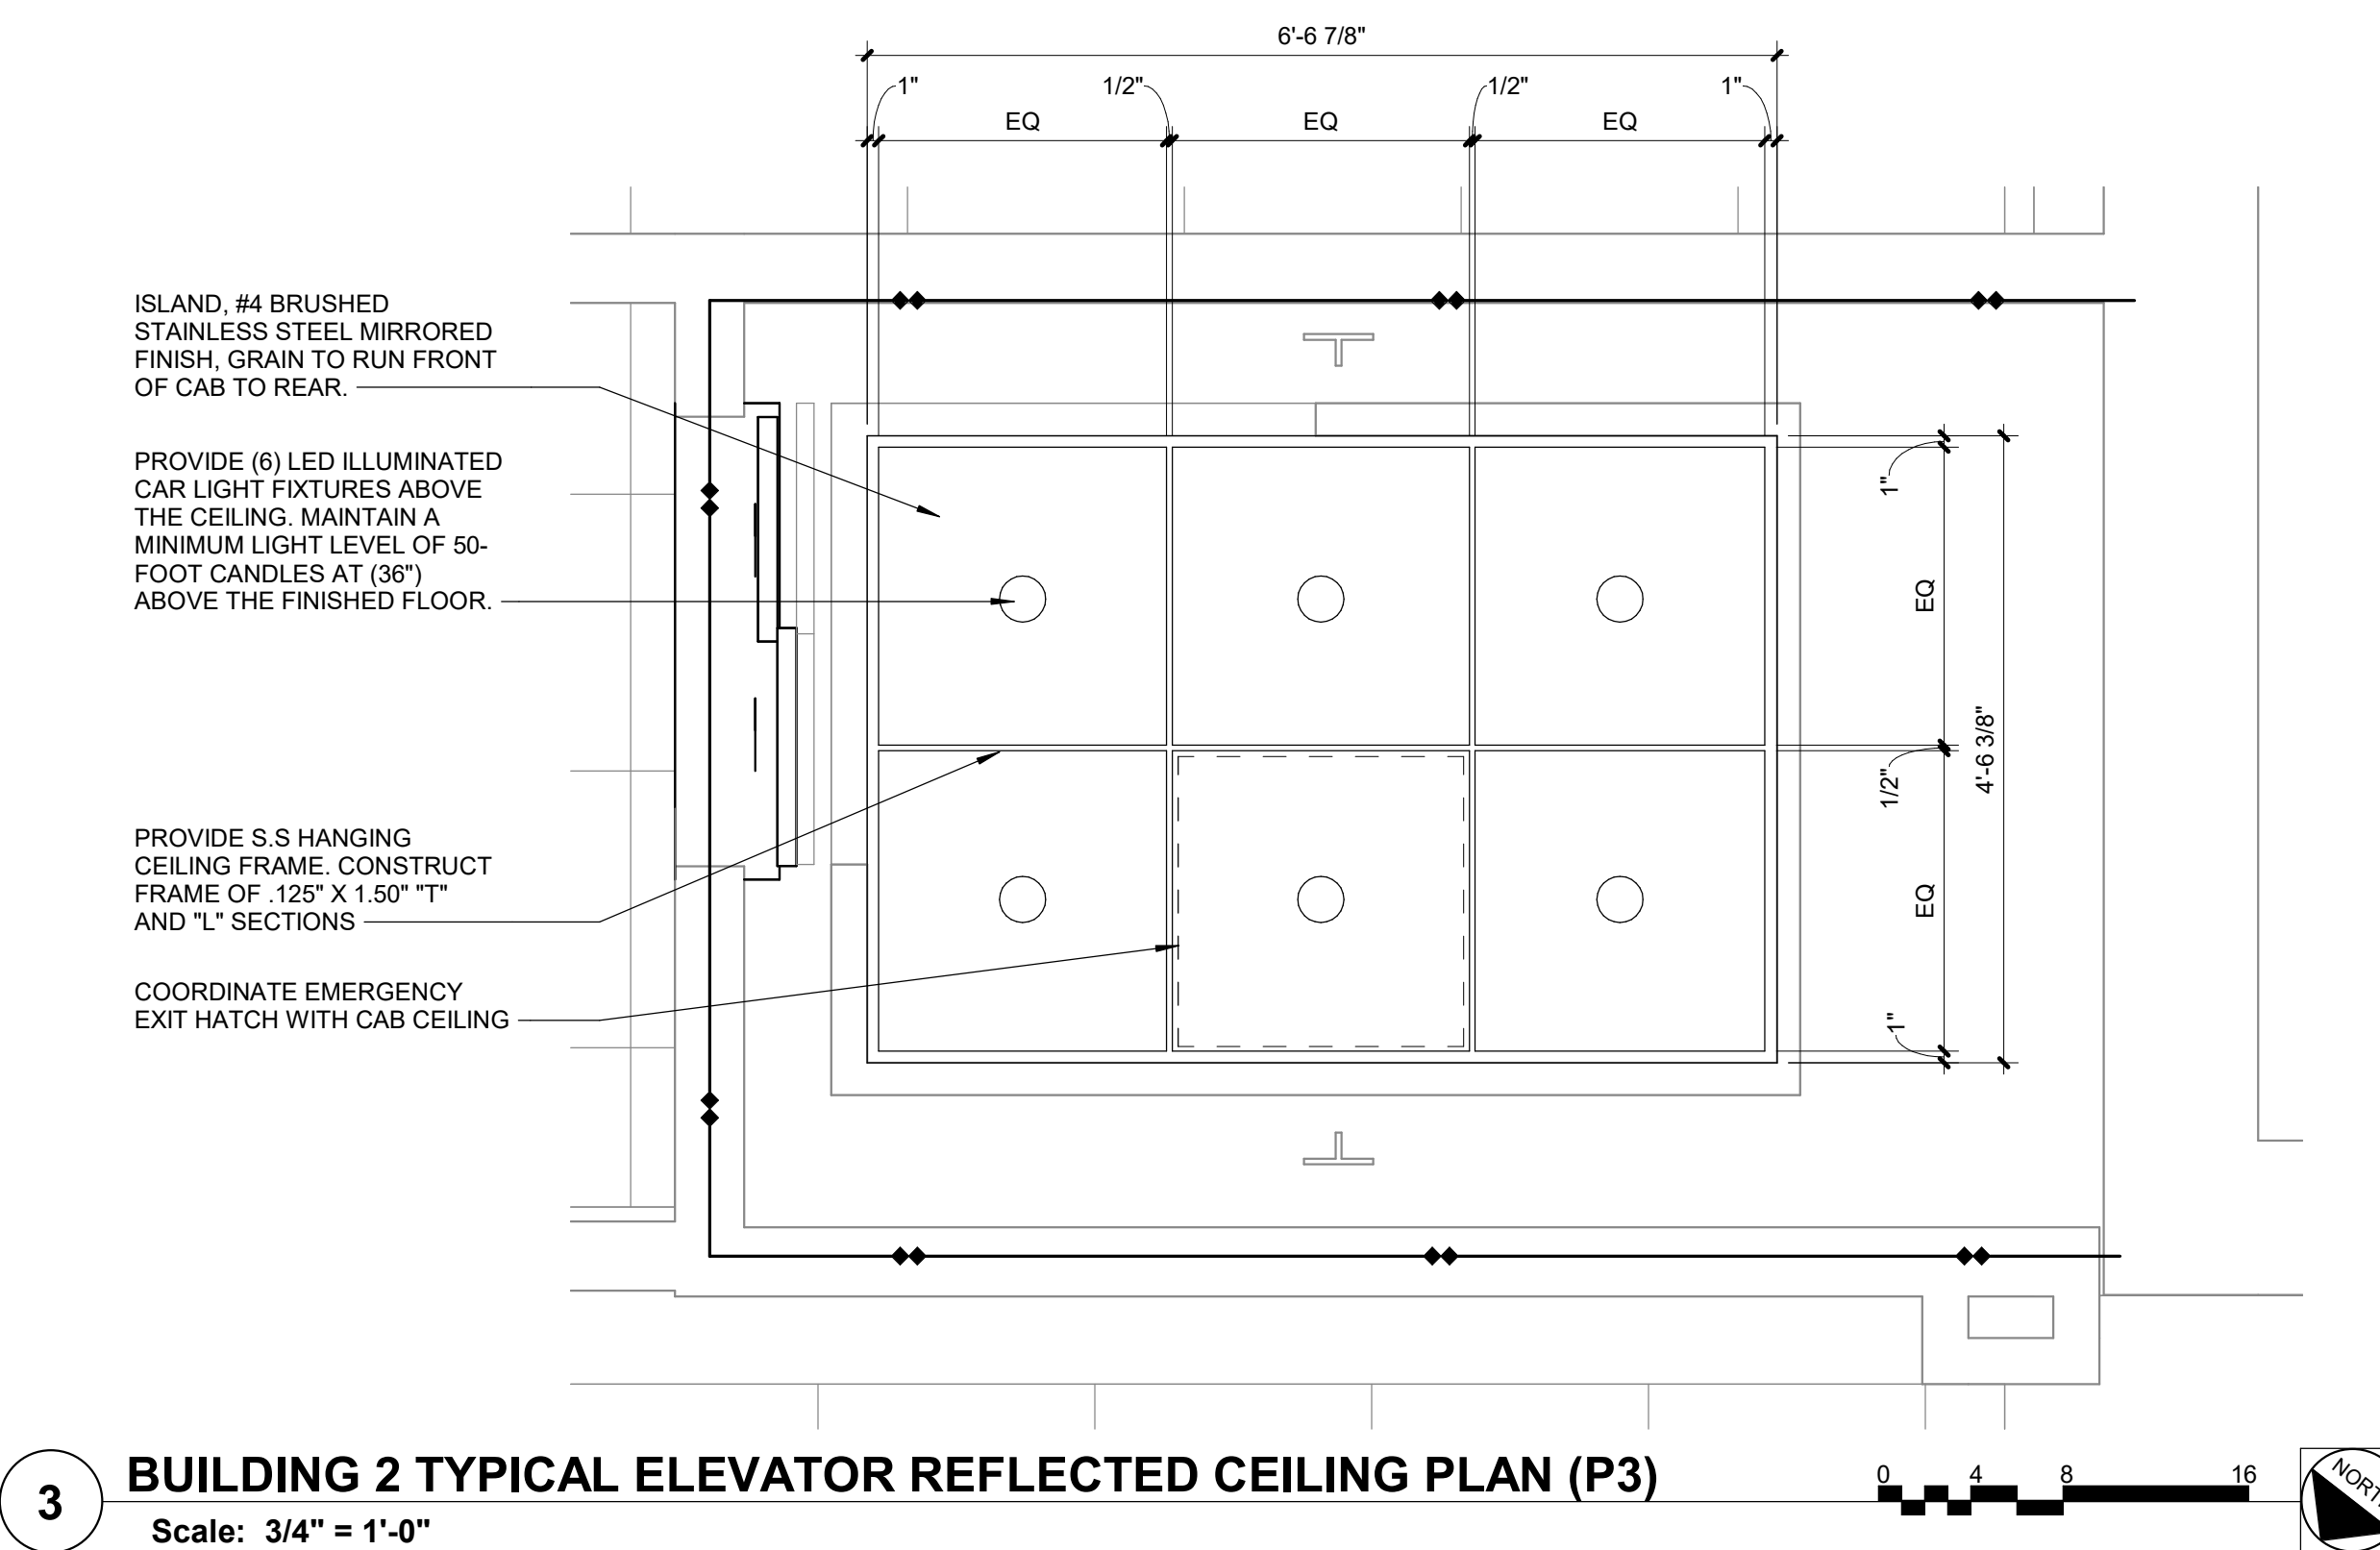


3 BUILDING 2 TYPICAL ELEVATOR REFLECTED CEILING PLAN (P3)
Scale: 3/4" = 1'-0"

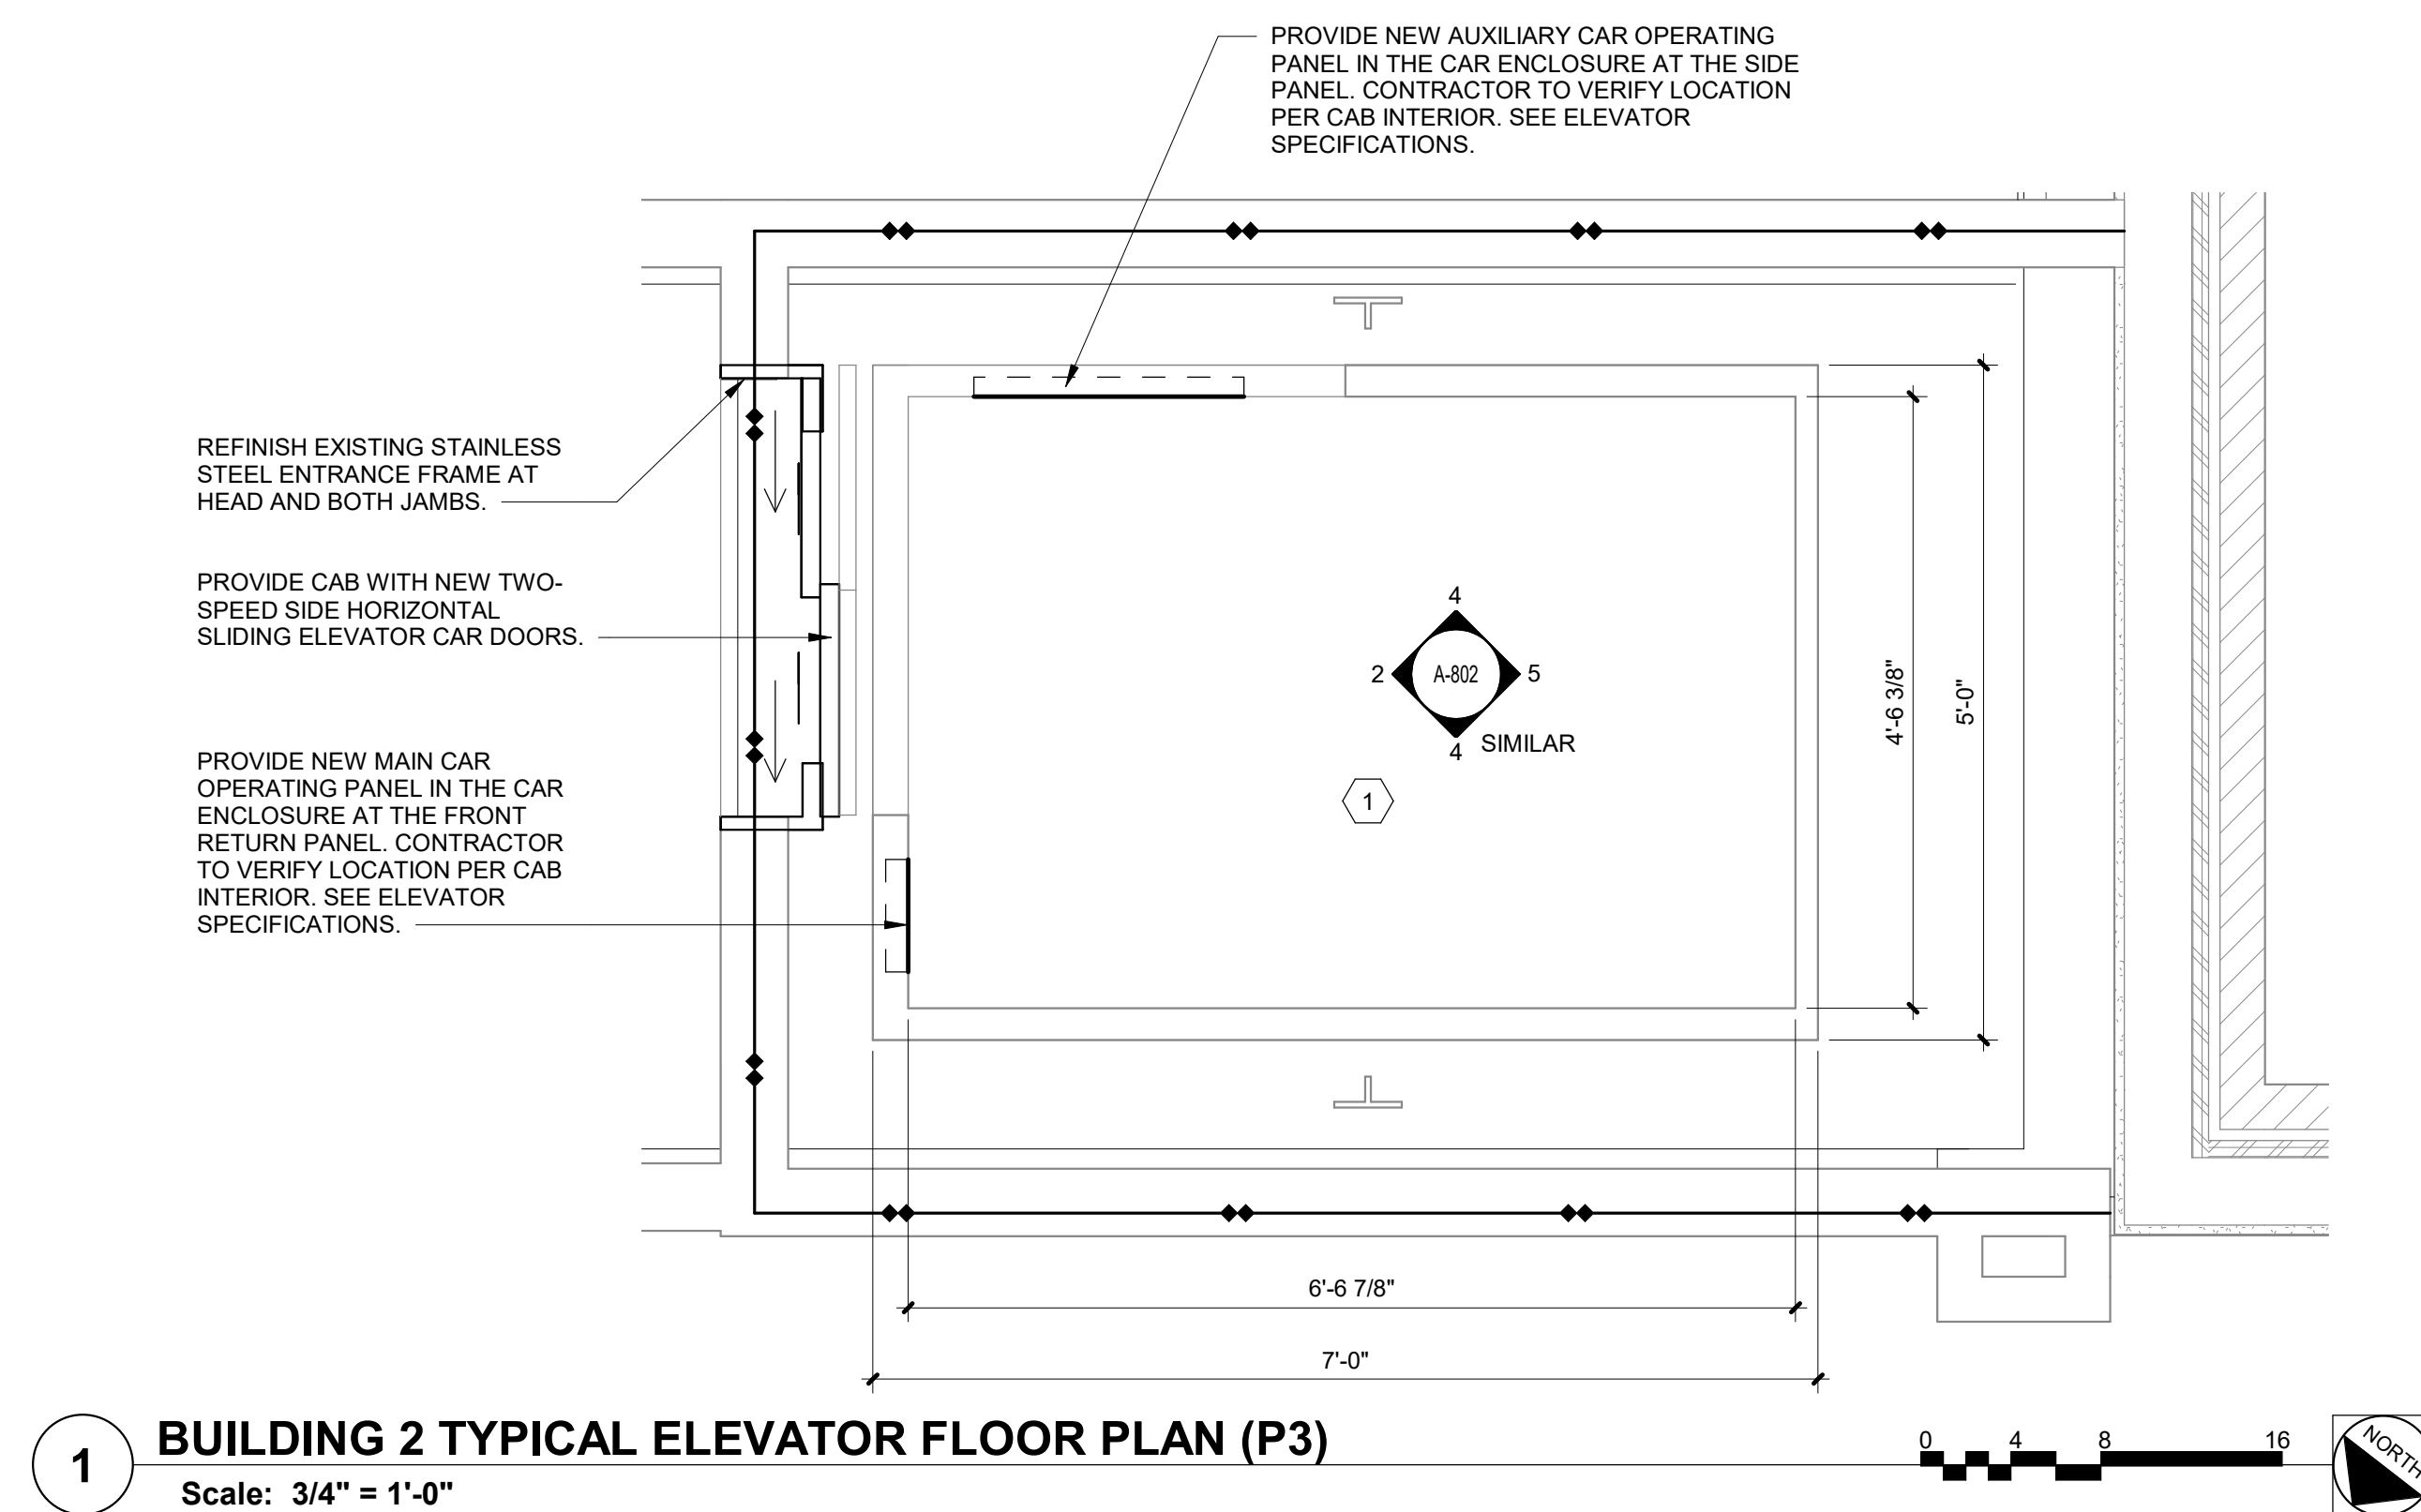


1 BUILDING 2 TYPICAL ELEVATOR FLOOR PLAN (P3)
Scale: 3/4" = 1'-0"

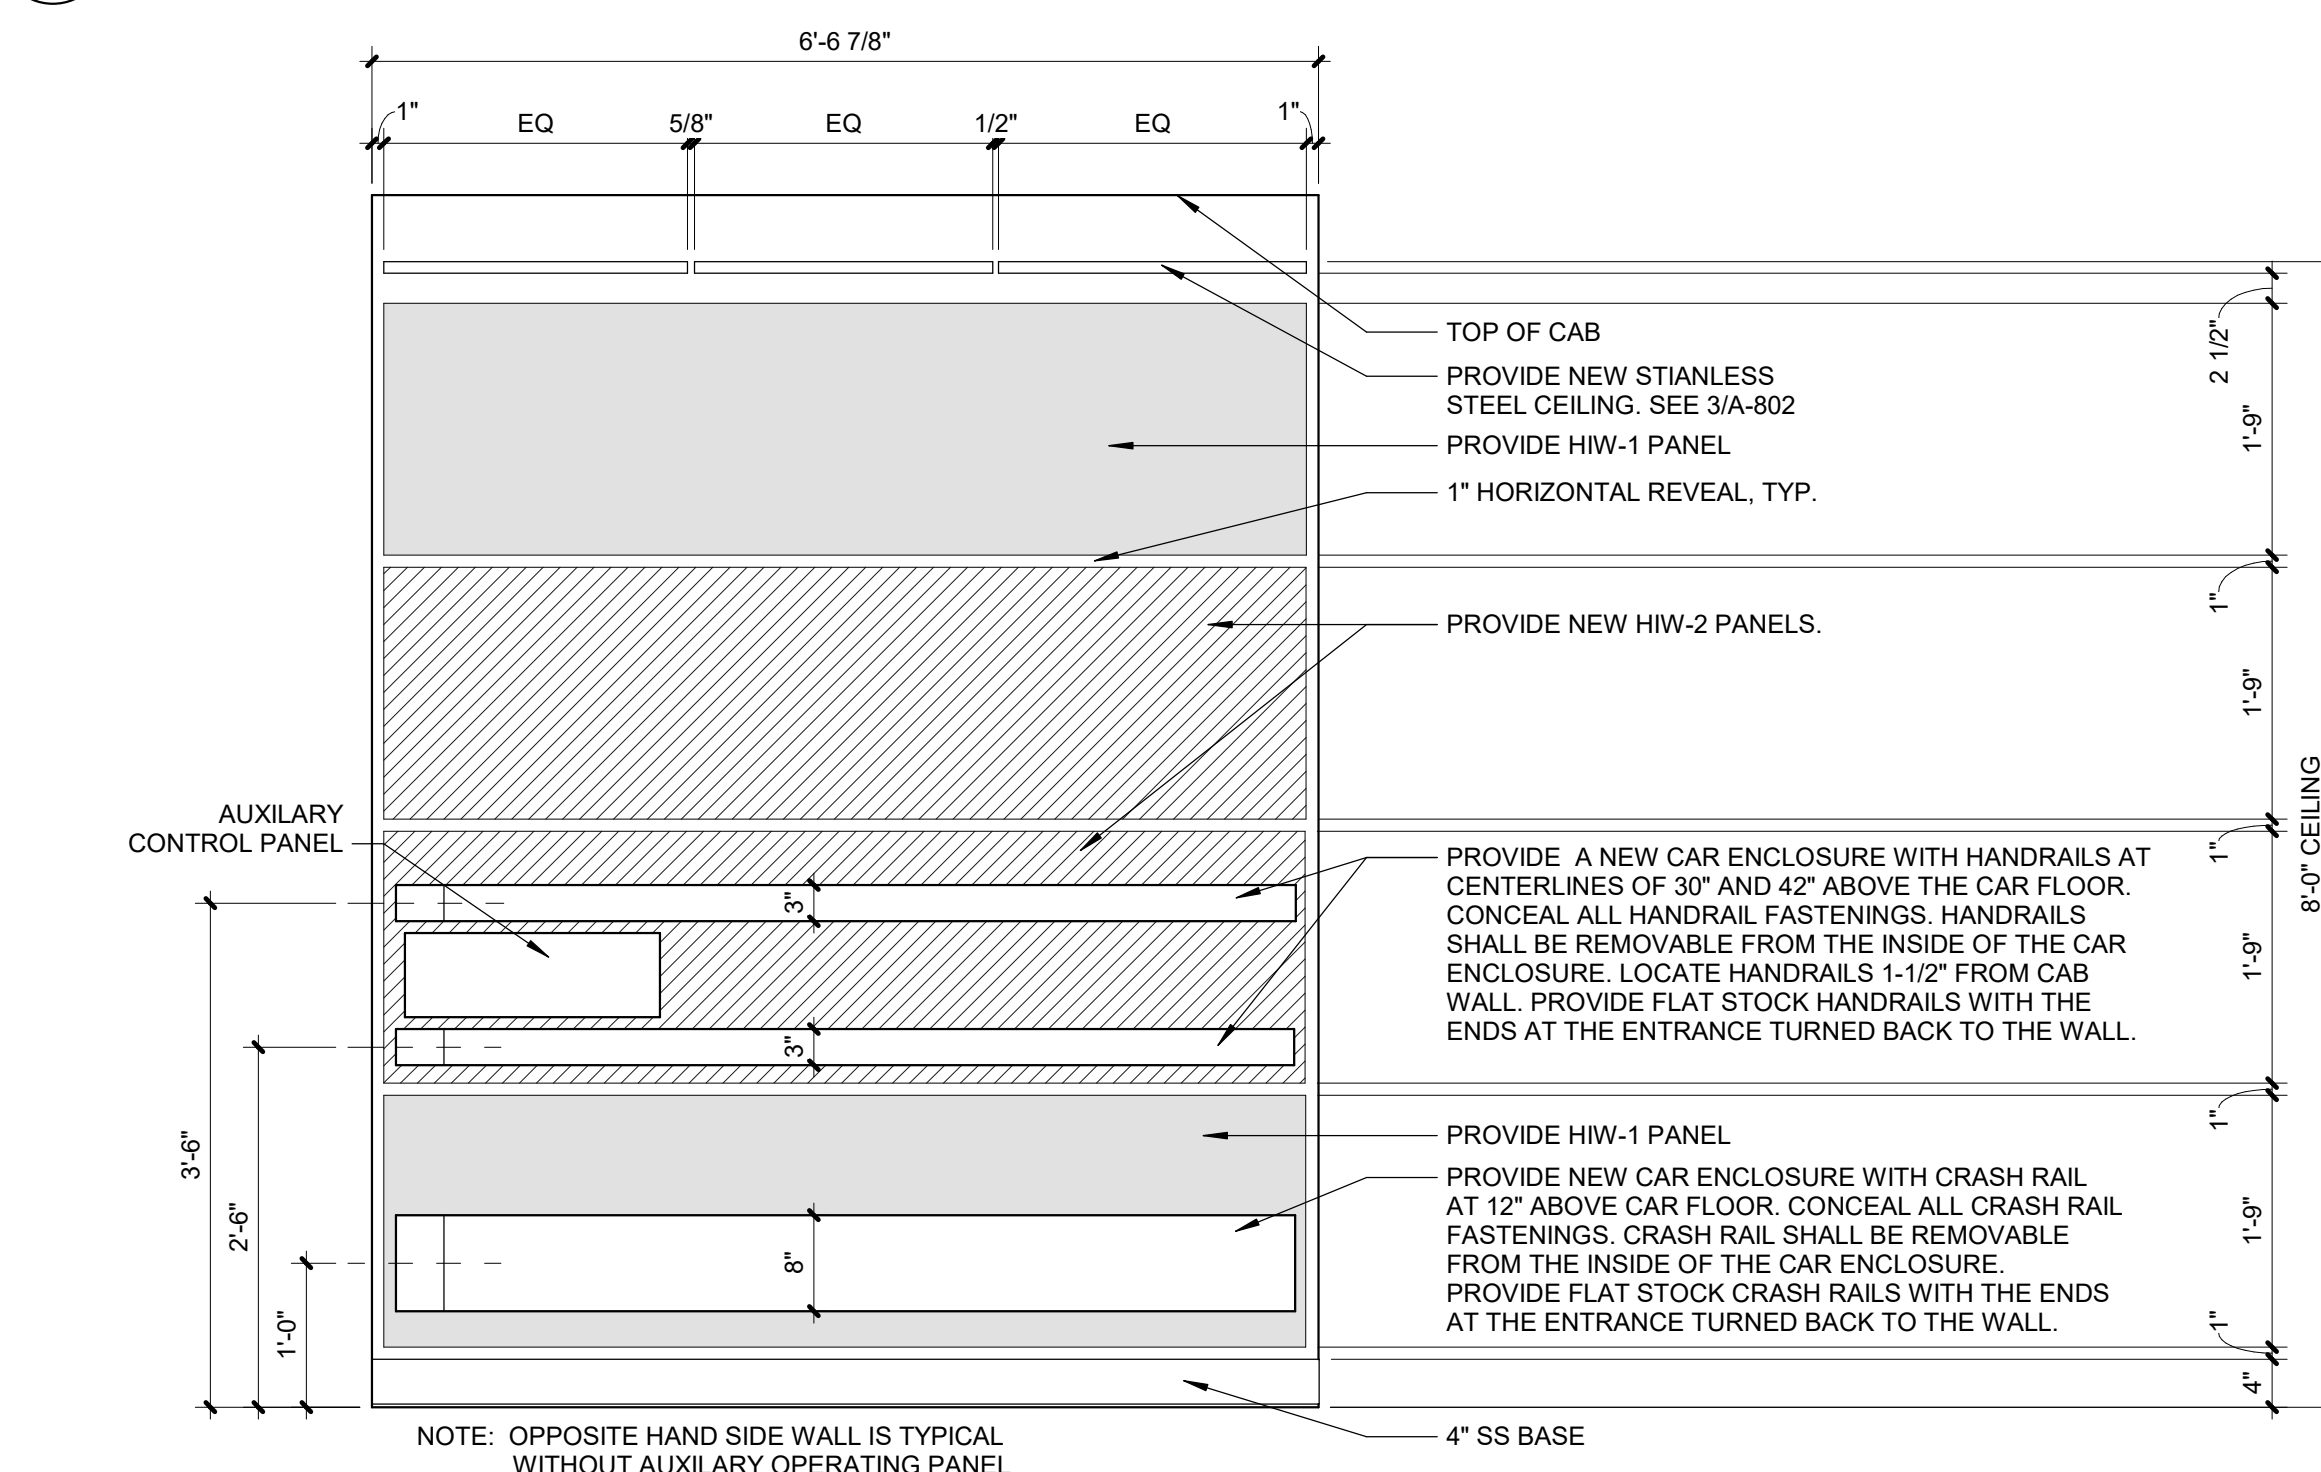

4 ELEVATOR CAB SIDE ELEVATION (P3)
Scale: 3/4" = 1'-0"

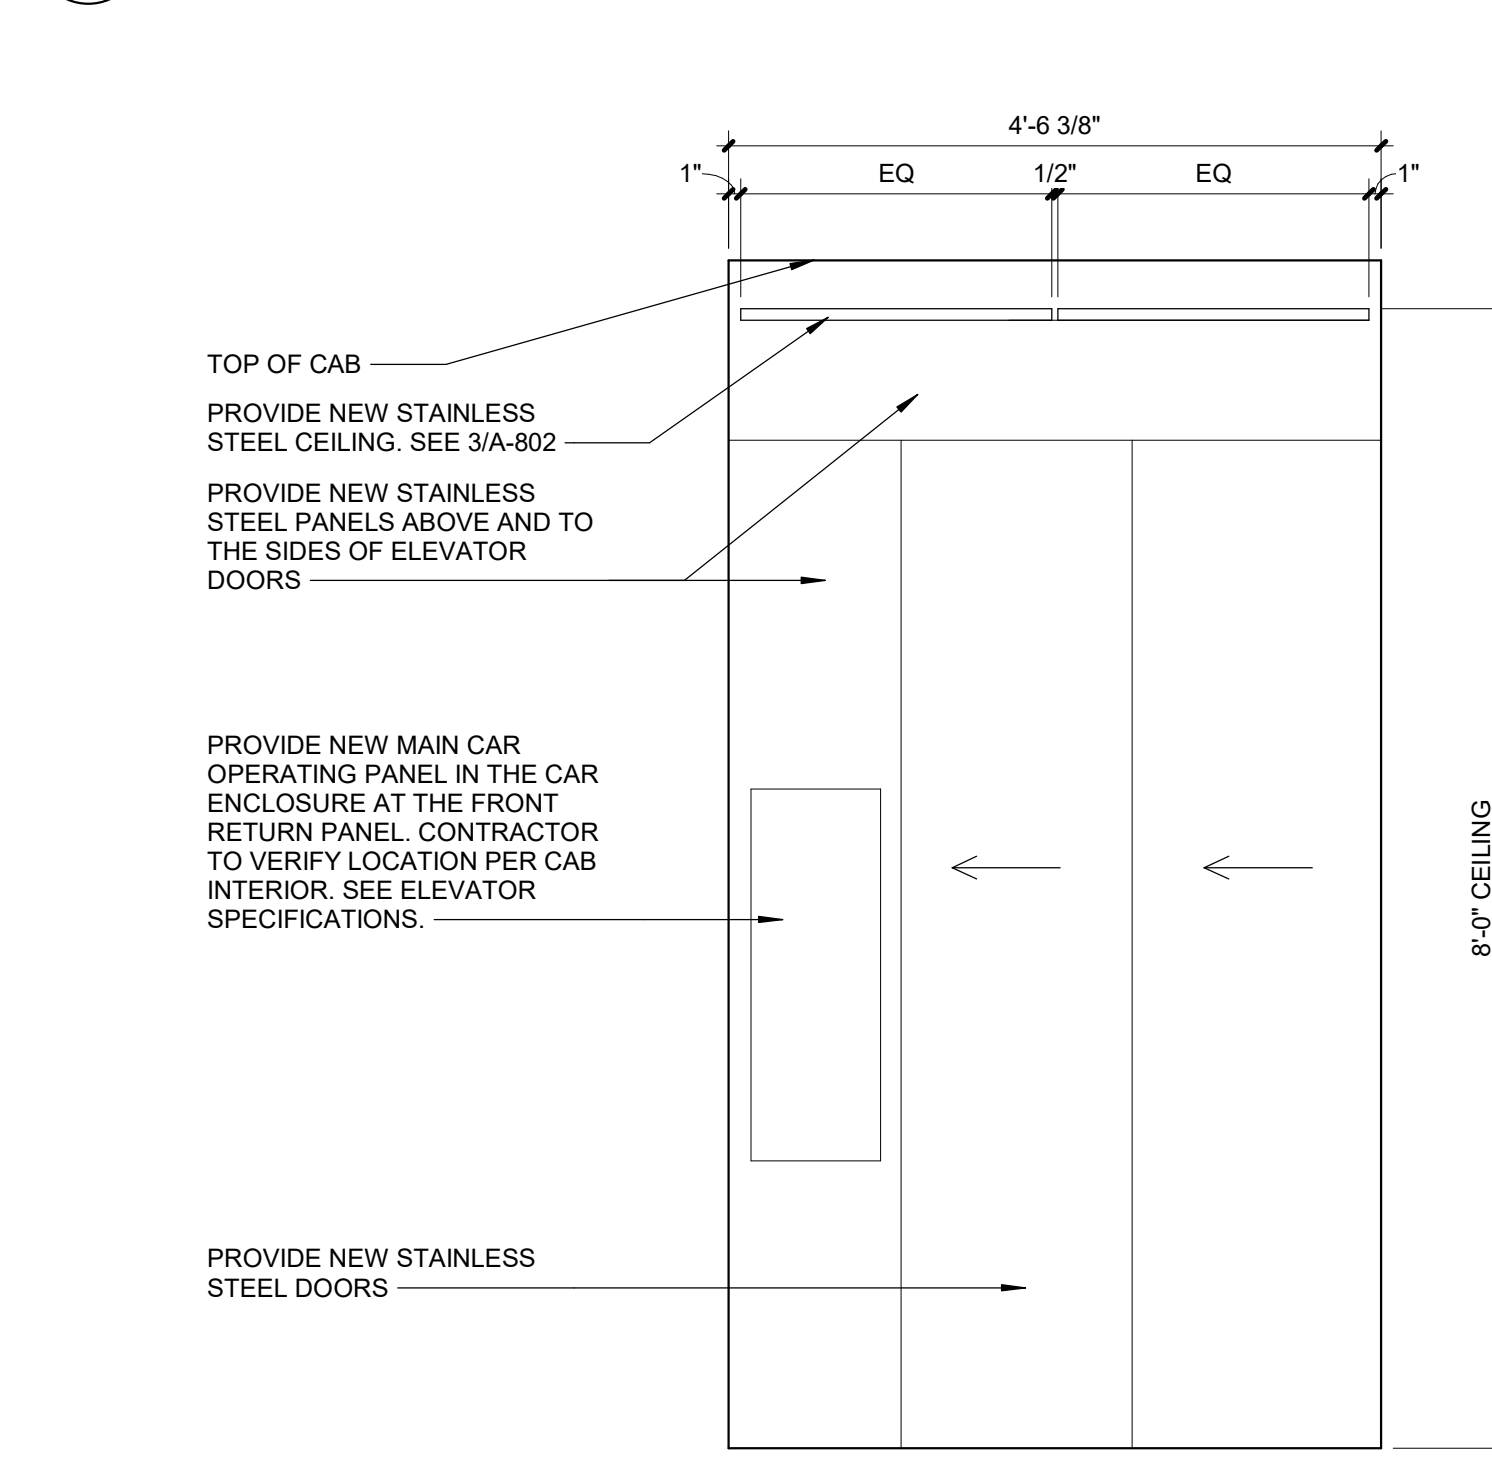

2 ELEVATOR CAB FRONT ELEVATION (P3)
Scale: 3/4" = 1'-0"

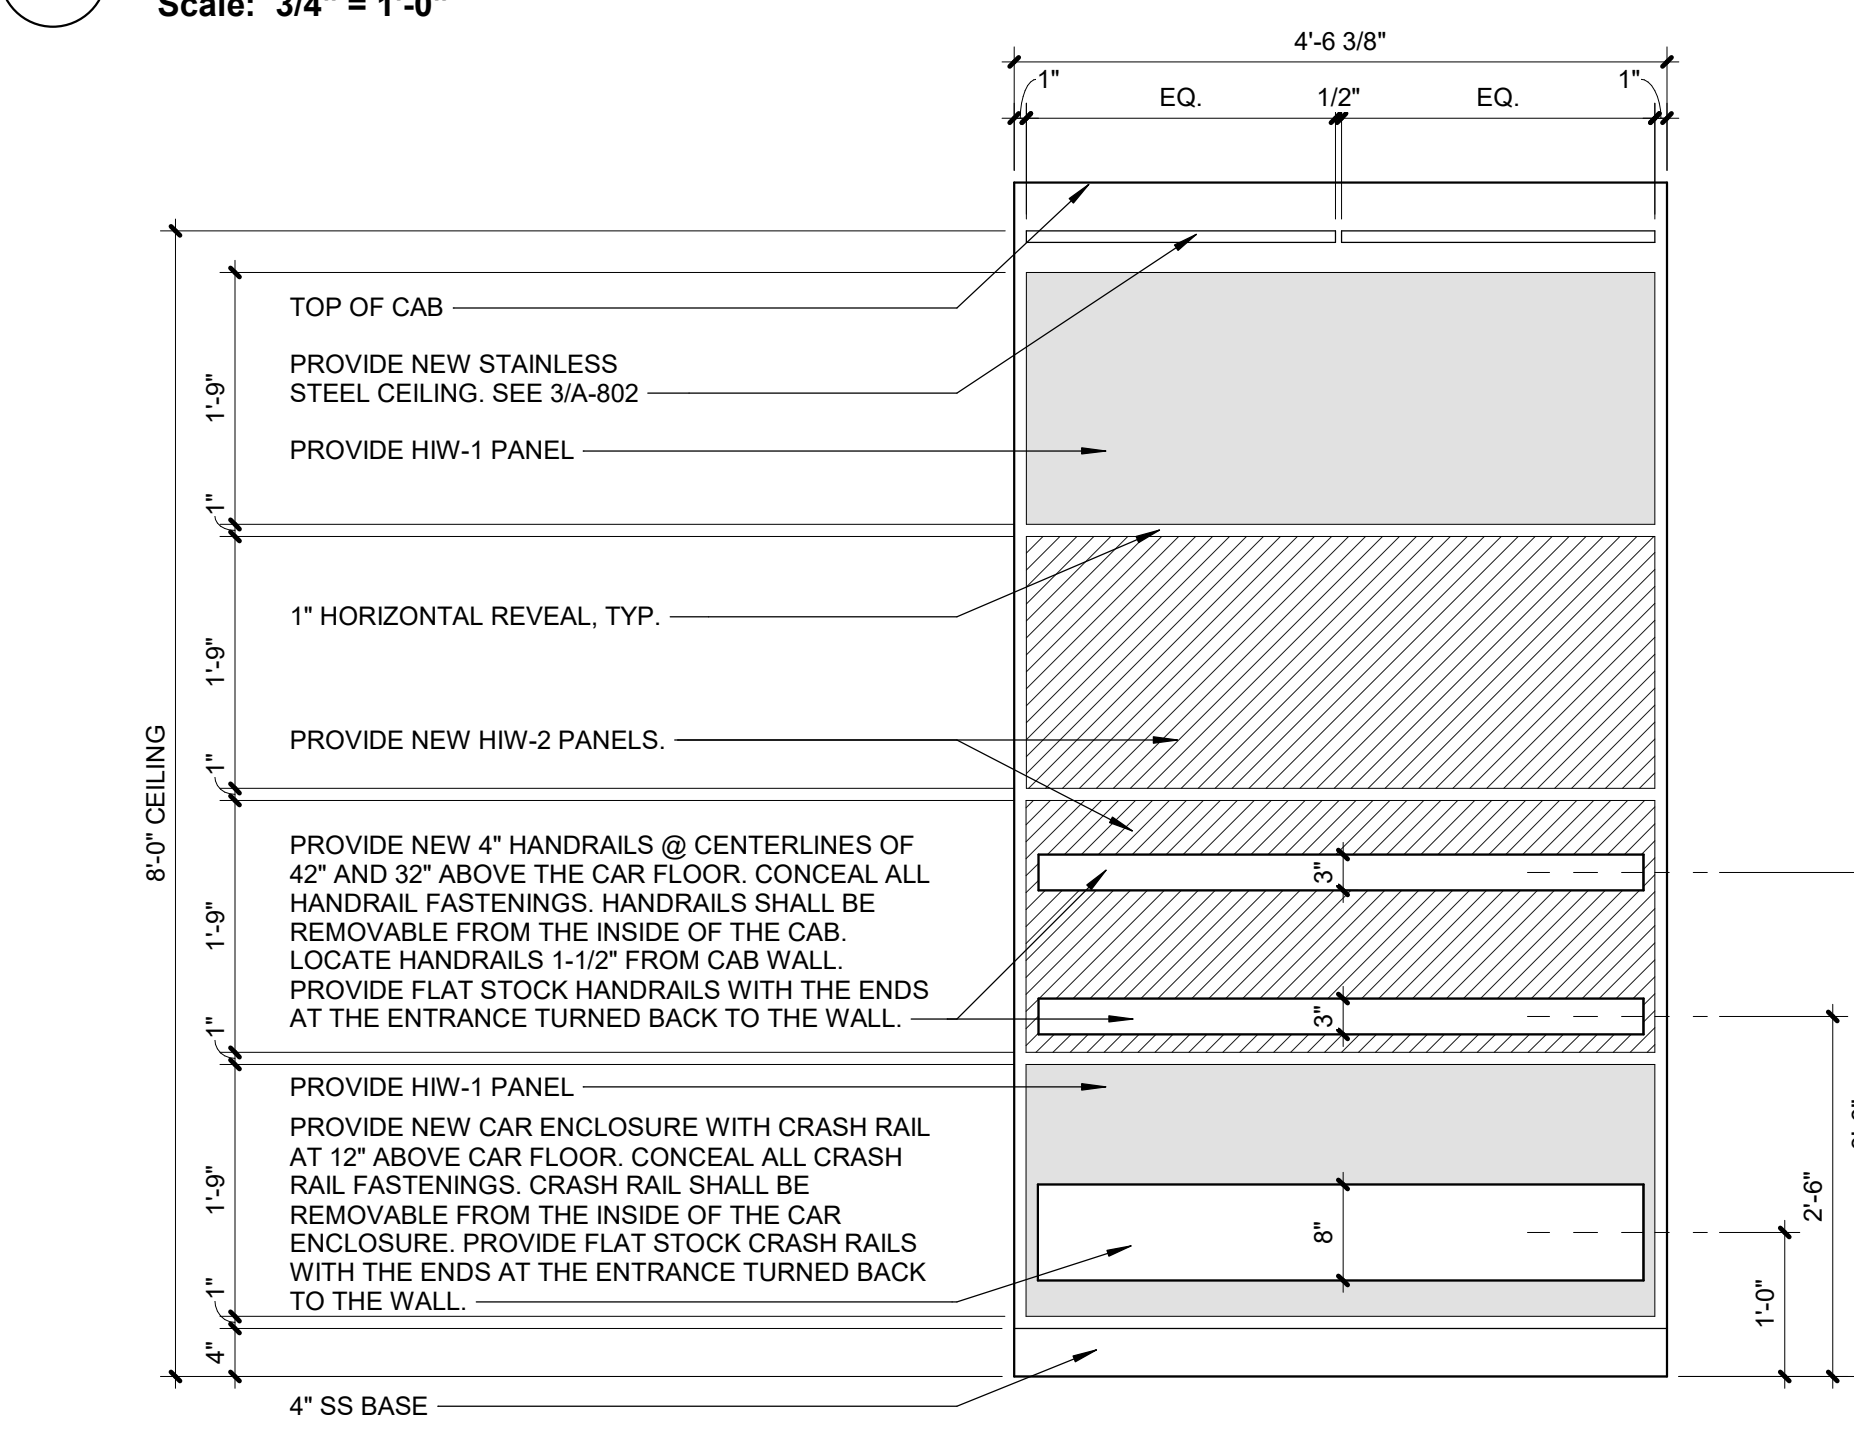

5 ELEVATOR CAB REAR ELEVATION (P3)
Scale: 3/4" = 1'-0"

SHEET NOTES:


- A. ALL ELECTRICAL WORK REQUIRED BY THIS MODIFICATION IS THE RESPONSIBILITY OF THE ELEVATOR CONTRACTOR. IF ANY WORK REQUIRES A LICENSED ELECTRICIAN, THIS SHALL BE INCLUDED IN THE RESPONSIBILITY OF THE ELEVATOR COMPANY TO RETAIN AND PROVIDE SUCH AN INDIVIDUAL IF NECESSARY.
- B. SEE ELEVATOR SCHEDULE ON A-001 FOR ADDITIONAL INFORMATION.

KEY NOTES:


- 1 PROVIDE NEW CAR ENCLOSURE WITH NEW FLOORING, LVT-1.

FULLY SPRINKLERED
100% BID DOCUMENTS


CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title BLDG 2 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
			ACG Project Number 21-344		Approved		Location TUSCALOOSA VAMC		Approved		Building Number 2	
			Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		Date FEBRUARY 6, 2025		Checked JK		Drawn KJC/ENP		Drawing Number A-802	
			www.acg-pa.com		919-858-7420		U.S. Department of Veterans Affairs				Dwg 17 of 21	

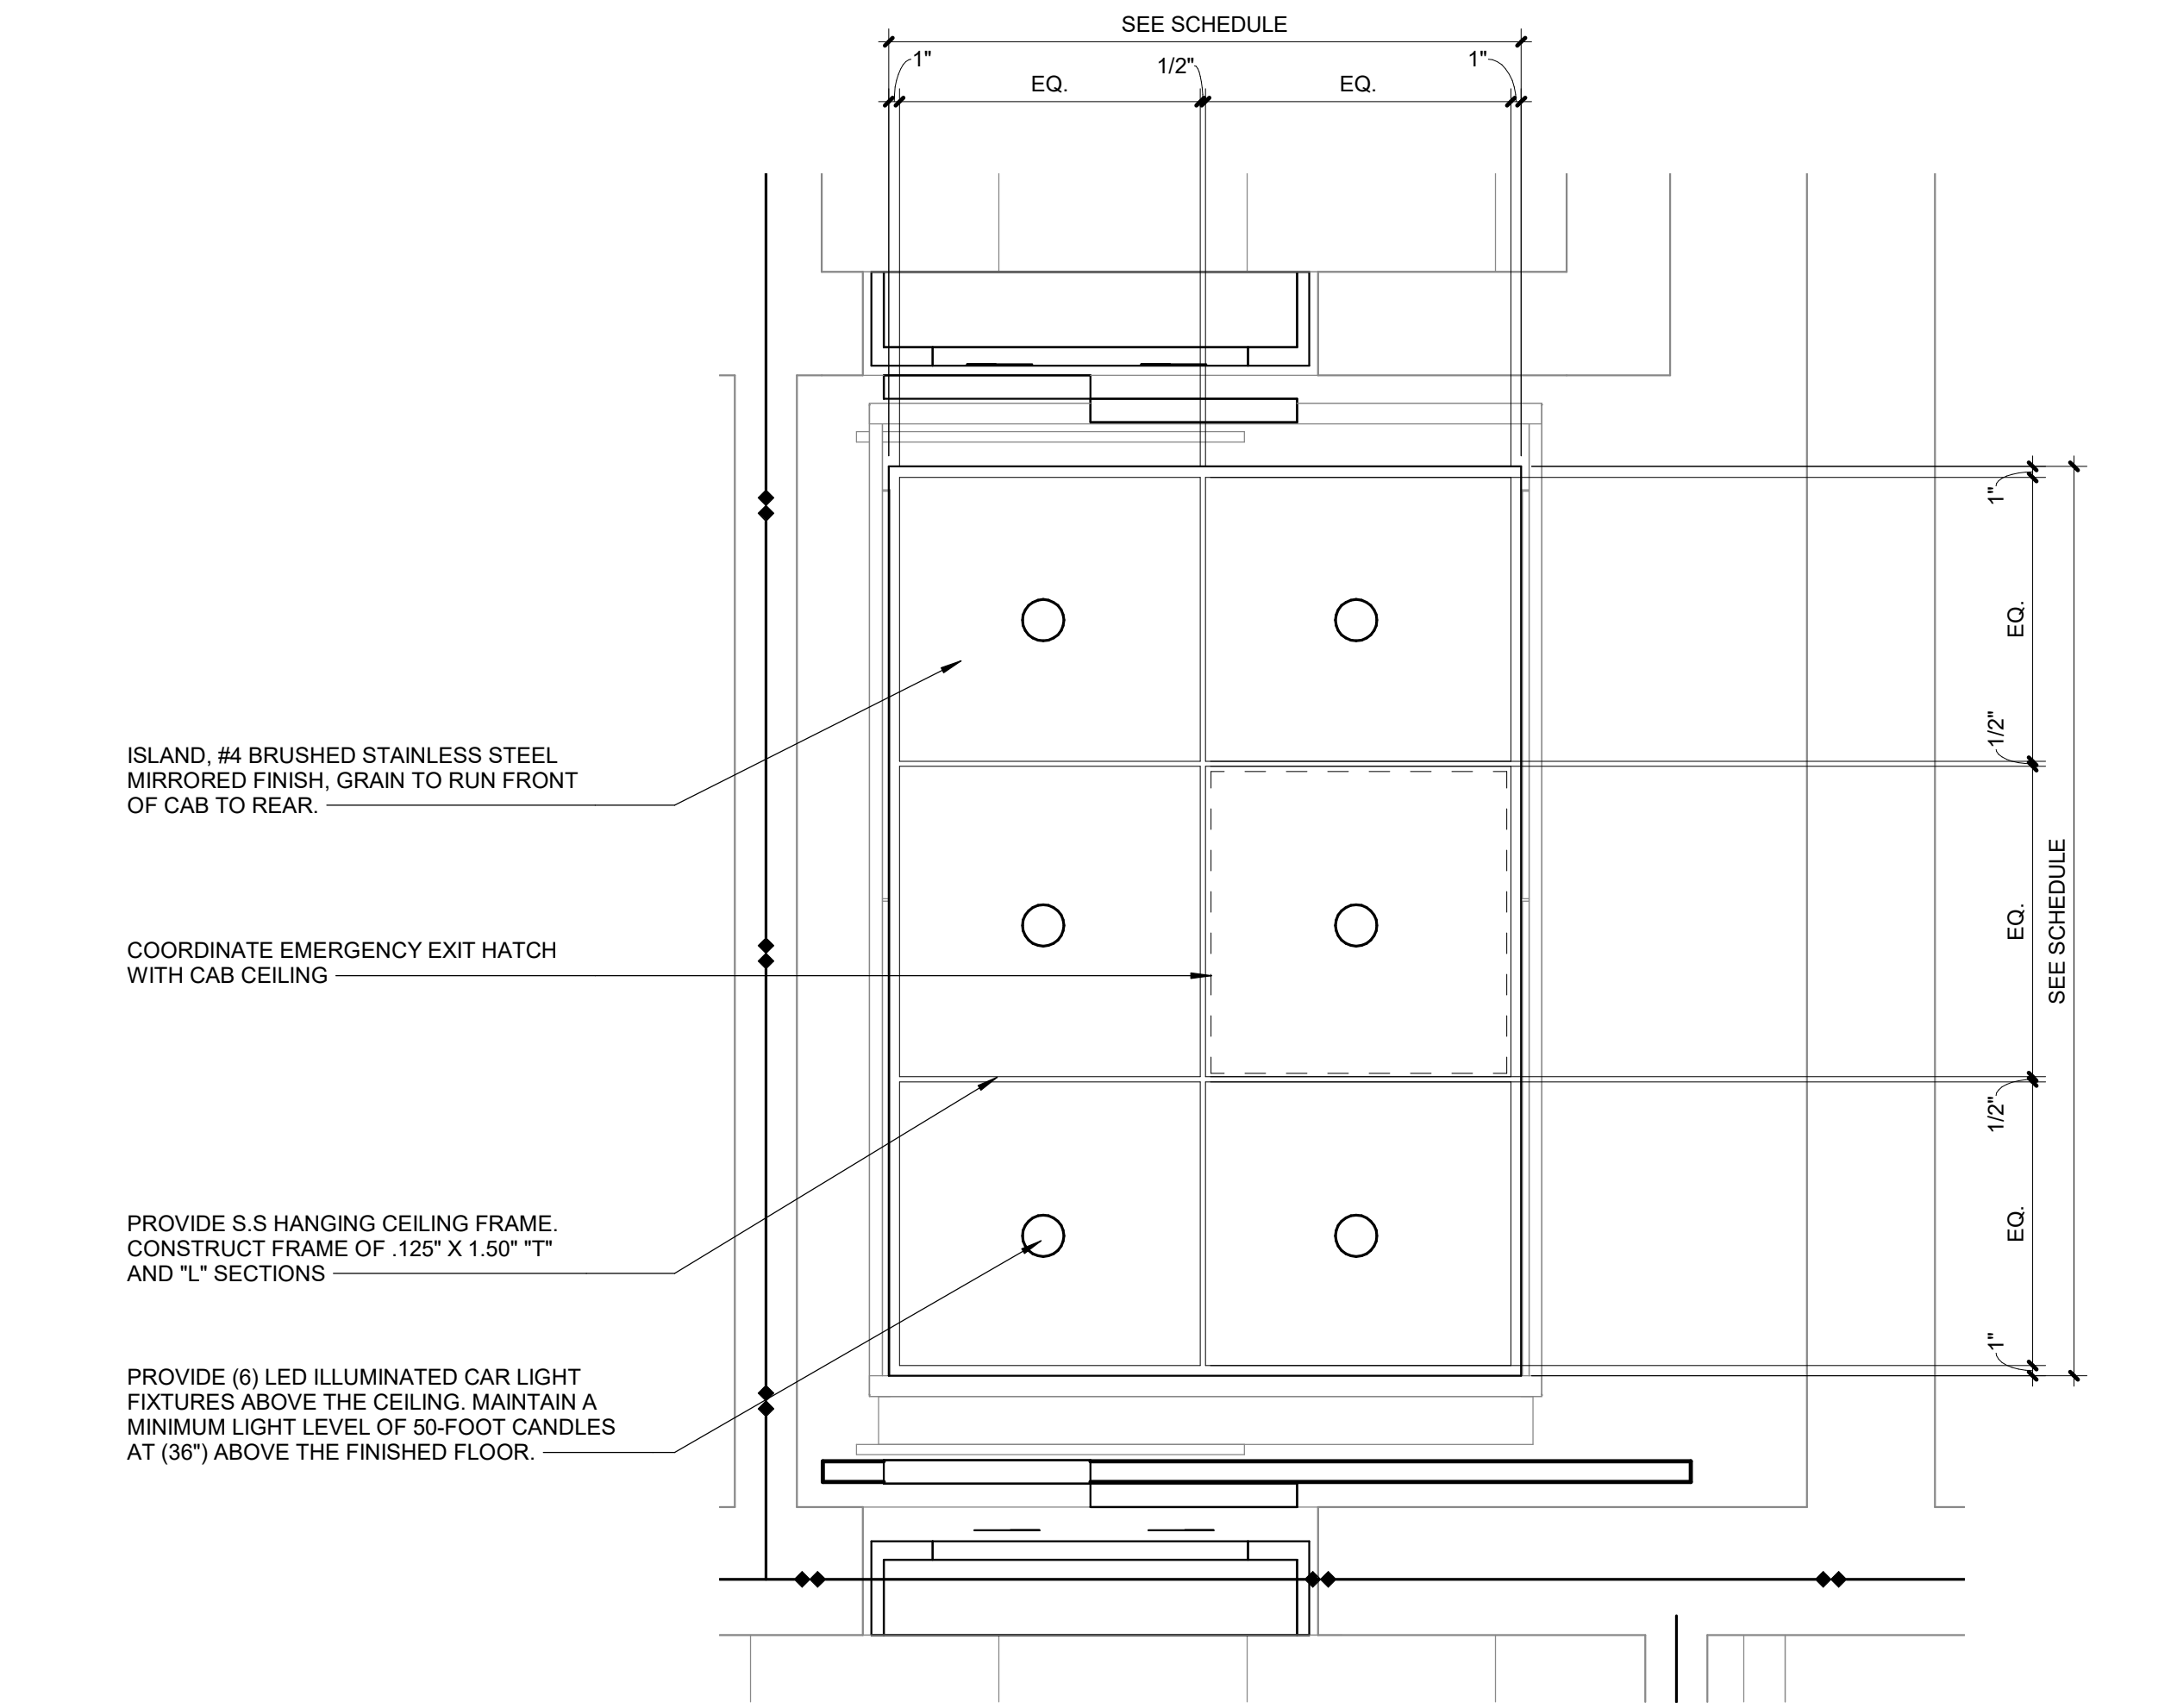


3 BUILDING 5 ELEVATOR REFLECTED CEILING PLAN (P13)
Scale: 3/4" = 1'-0"

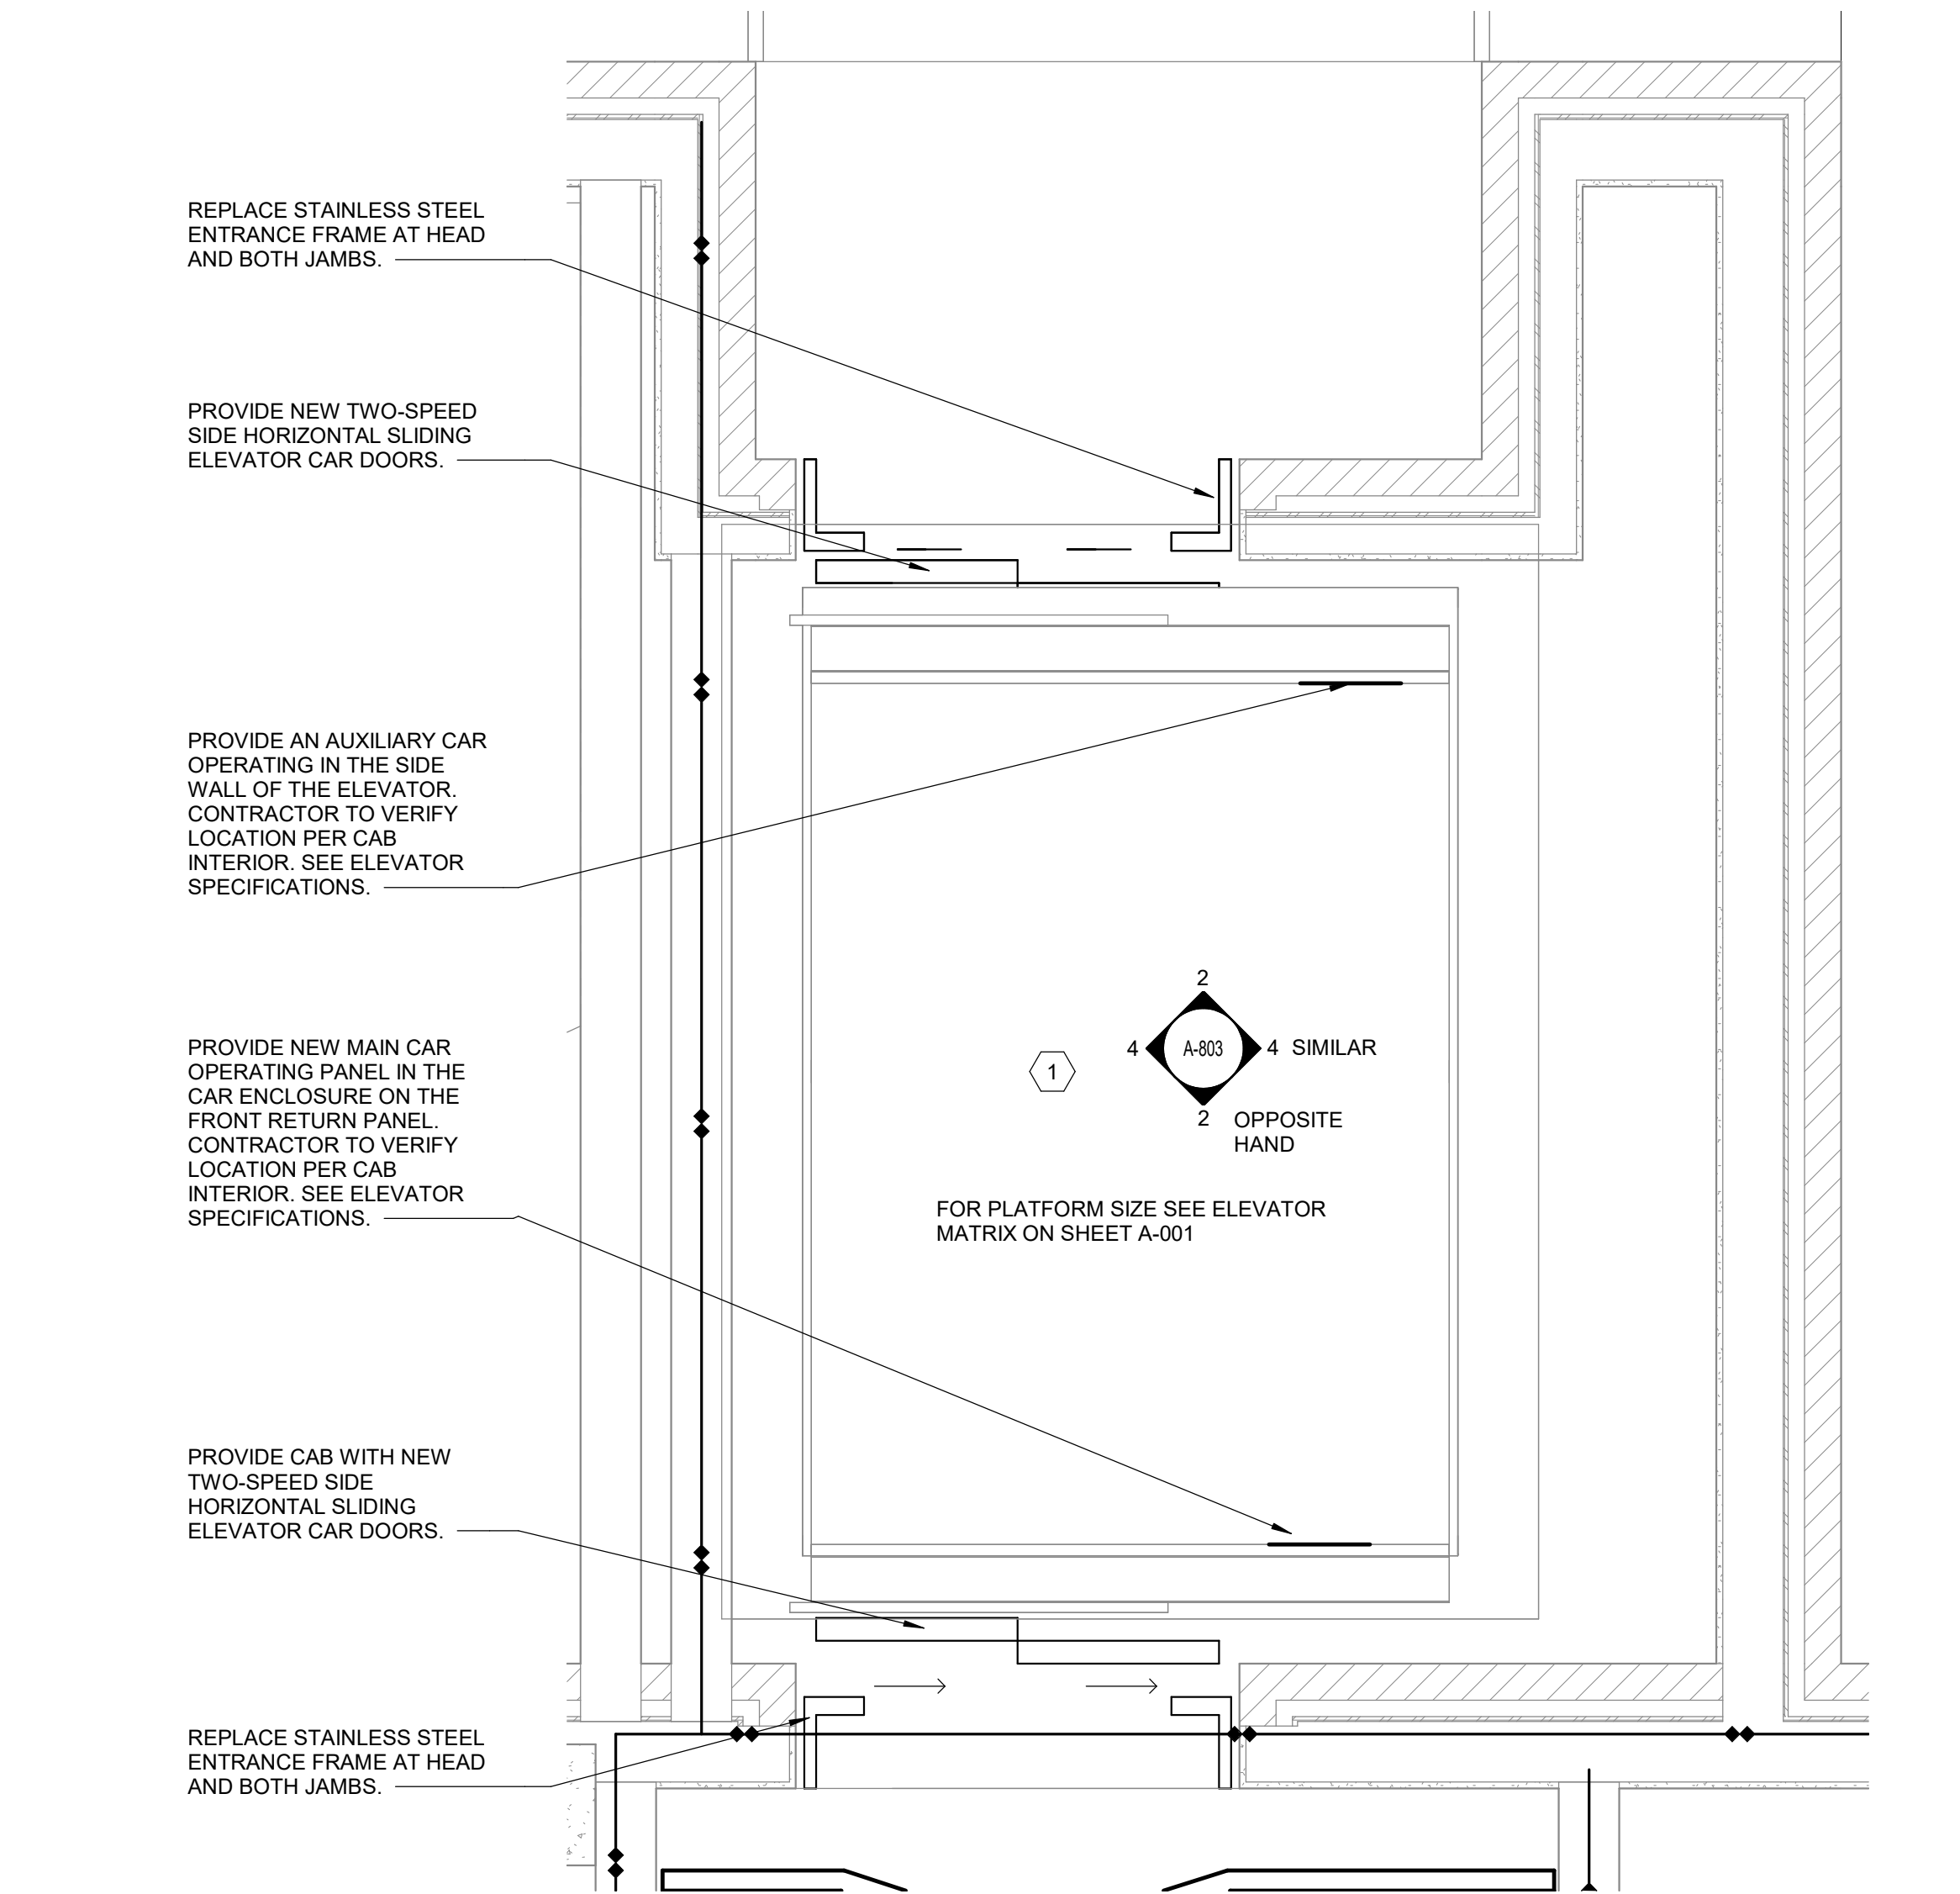

1 BUILDING 5 TYPICAL ELEVATOR FLOOR PLAN (P13)
Scale: 3/4" = 1'-0"

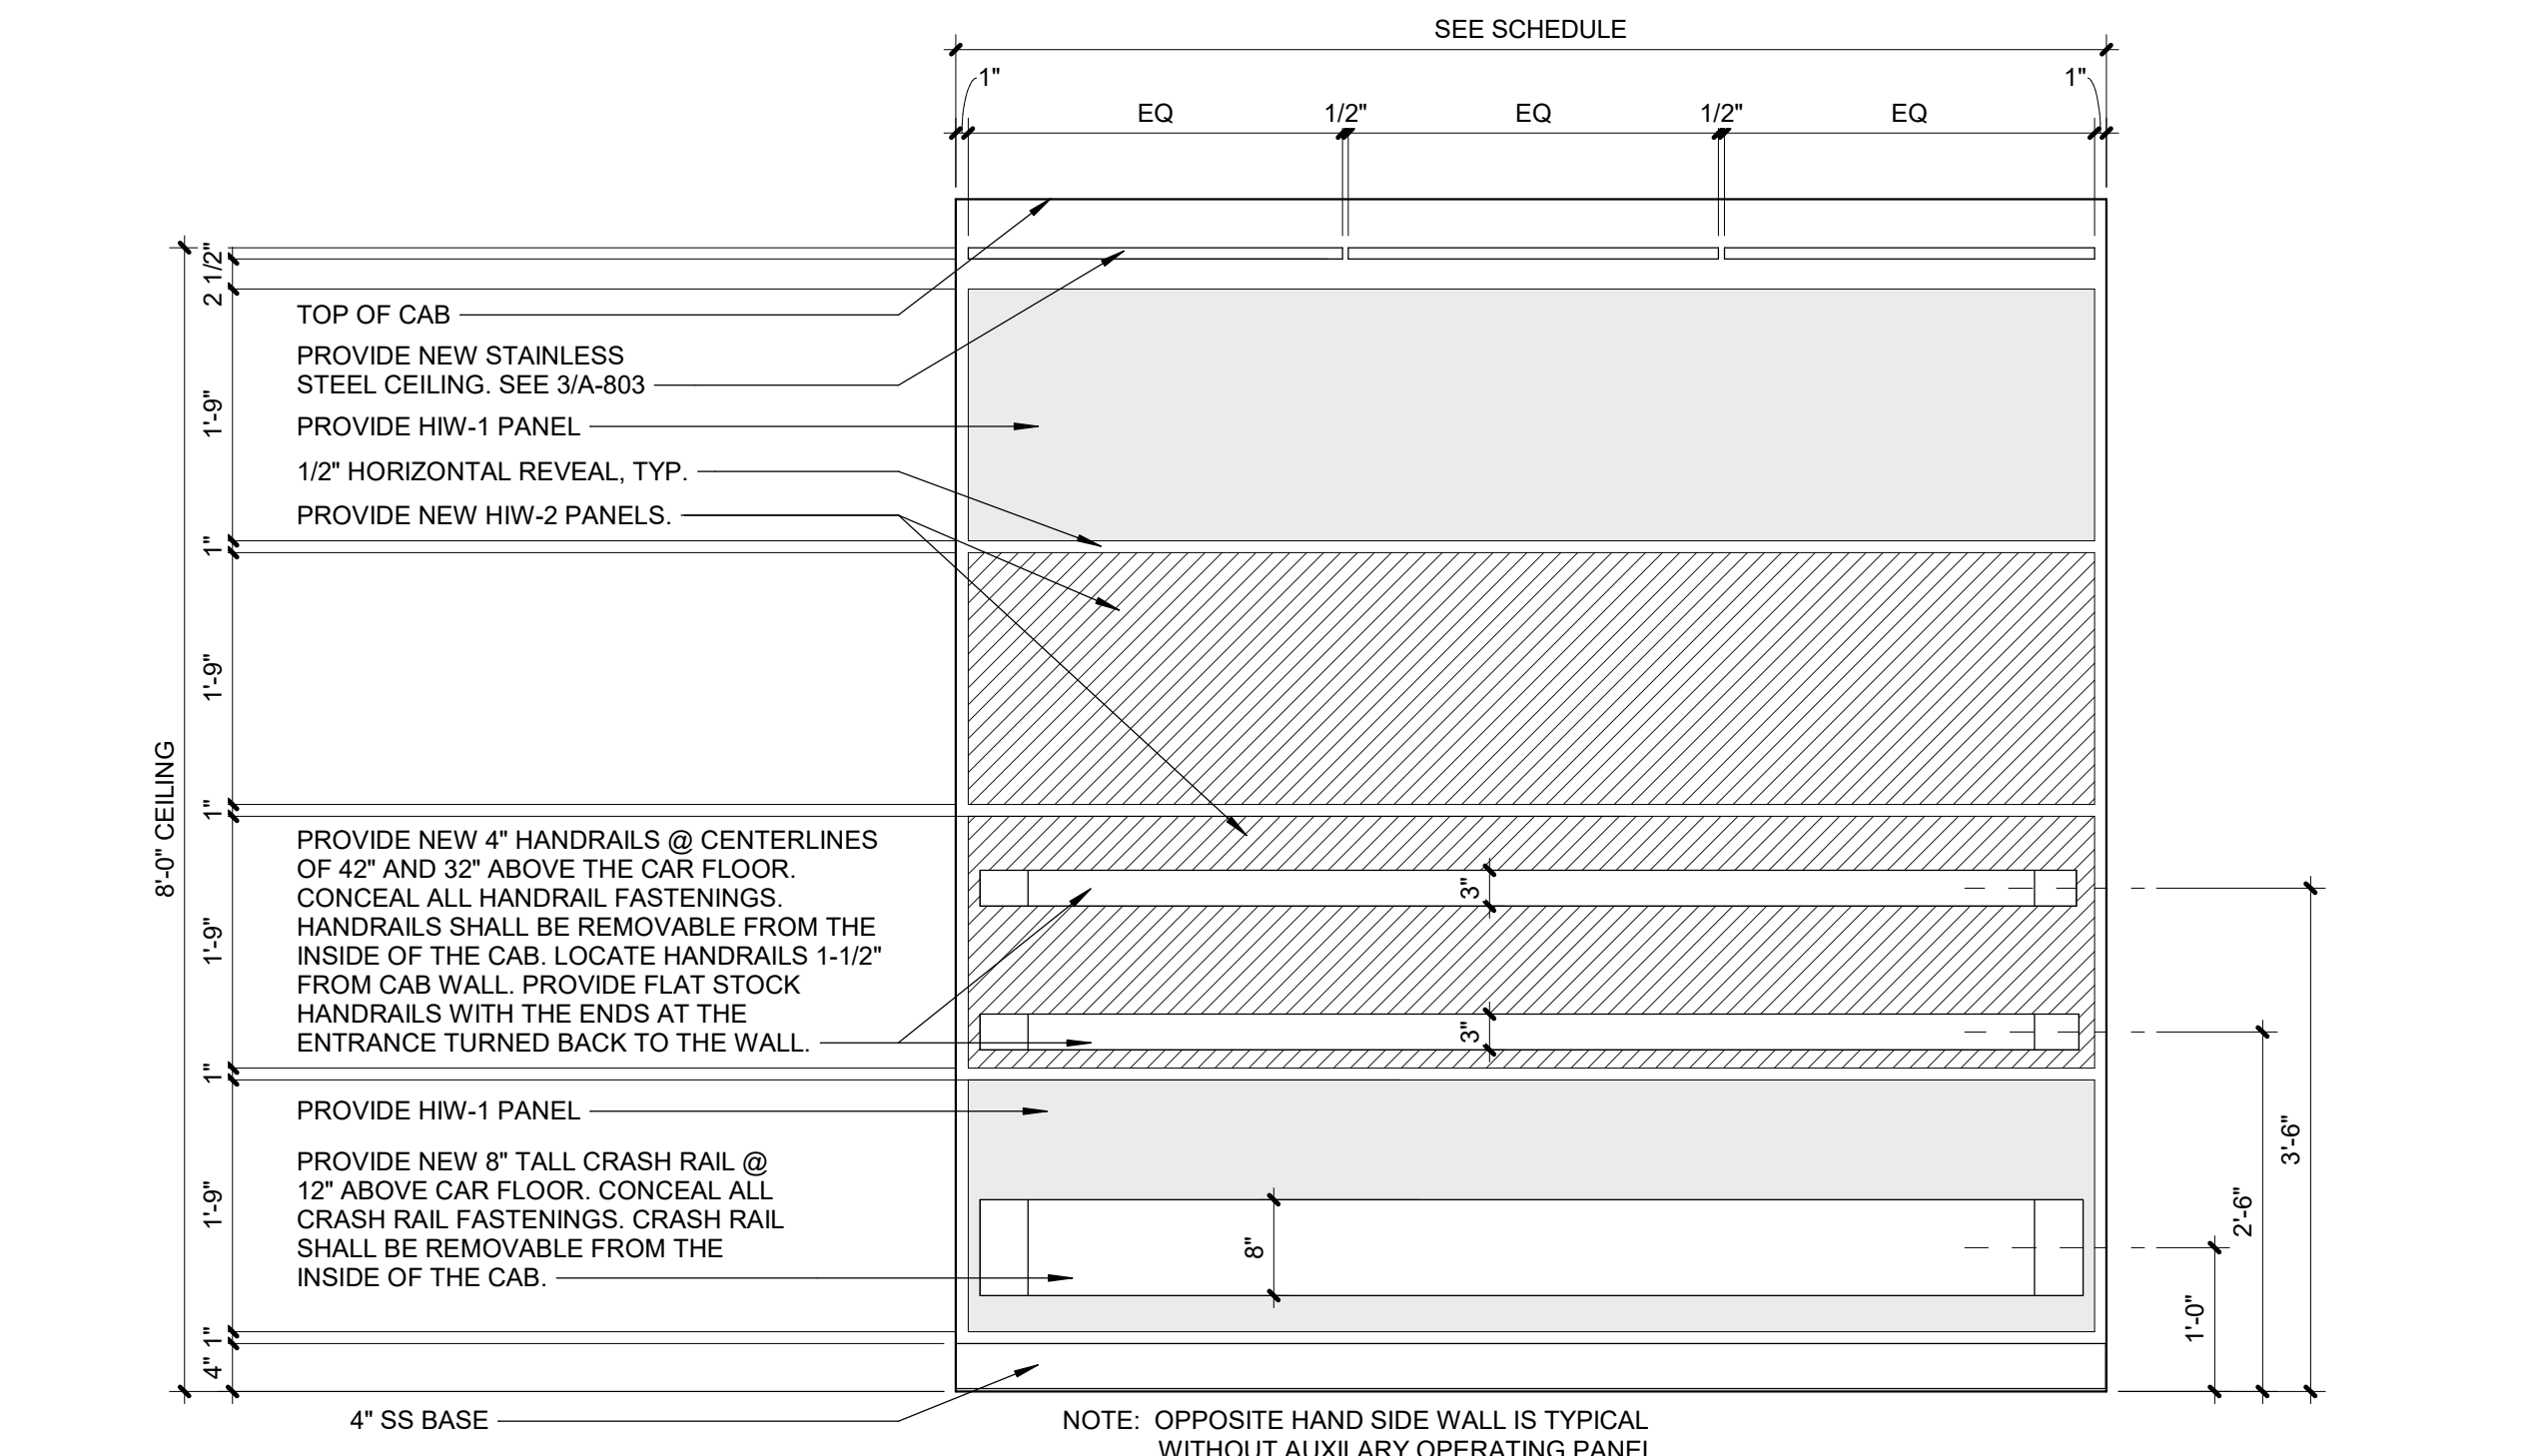

4 ELEVATOR CAB SIDE ELEVATION (P13)
Scale: 3/4" = 1'-0"

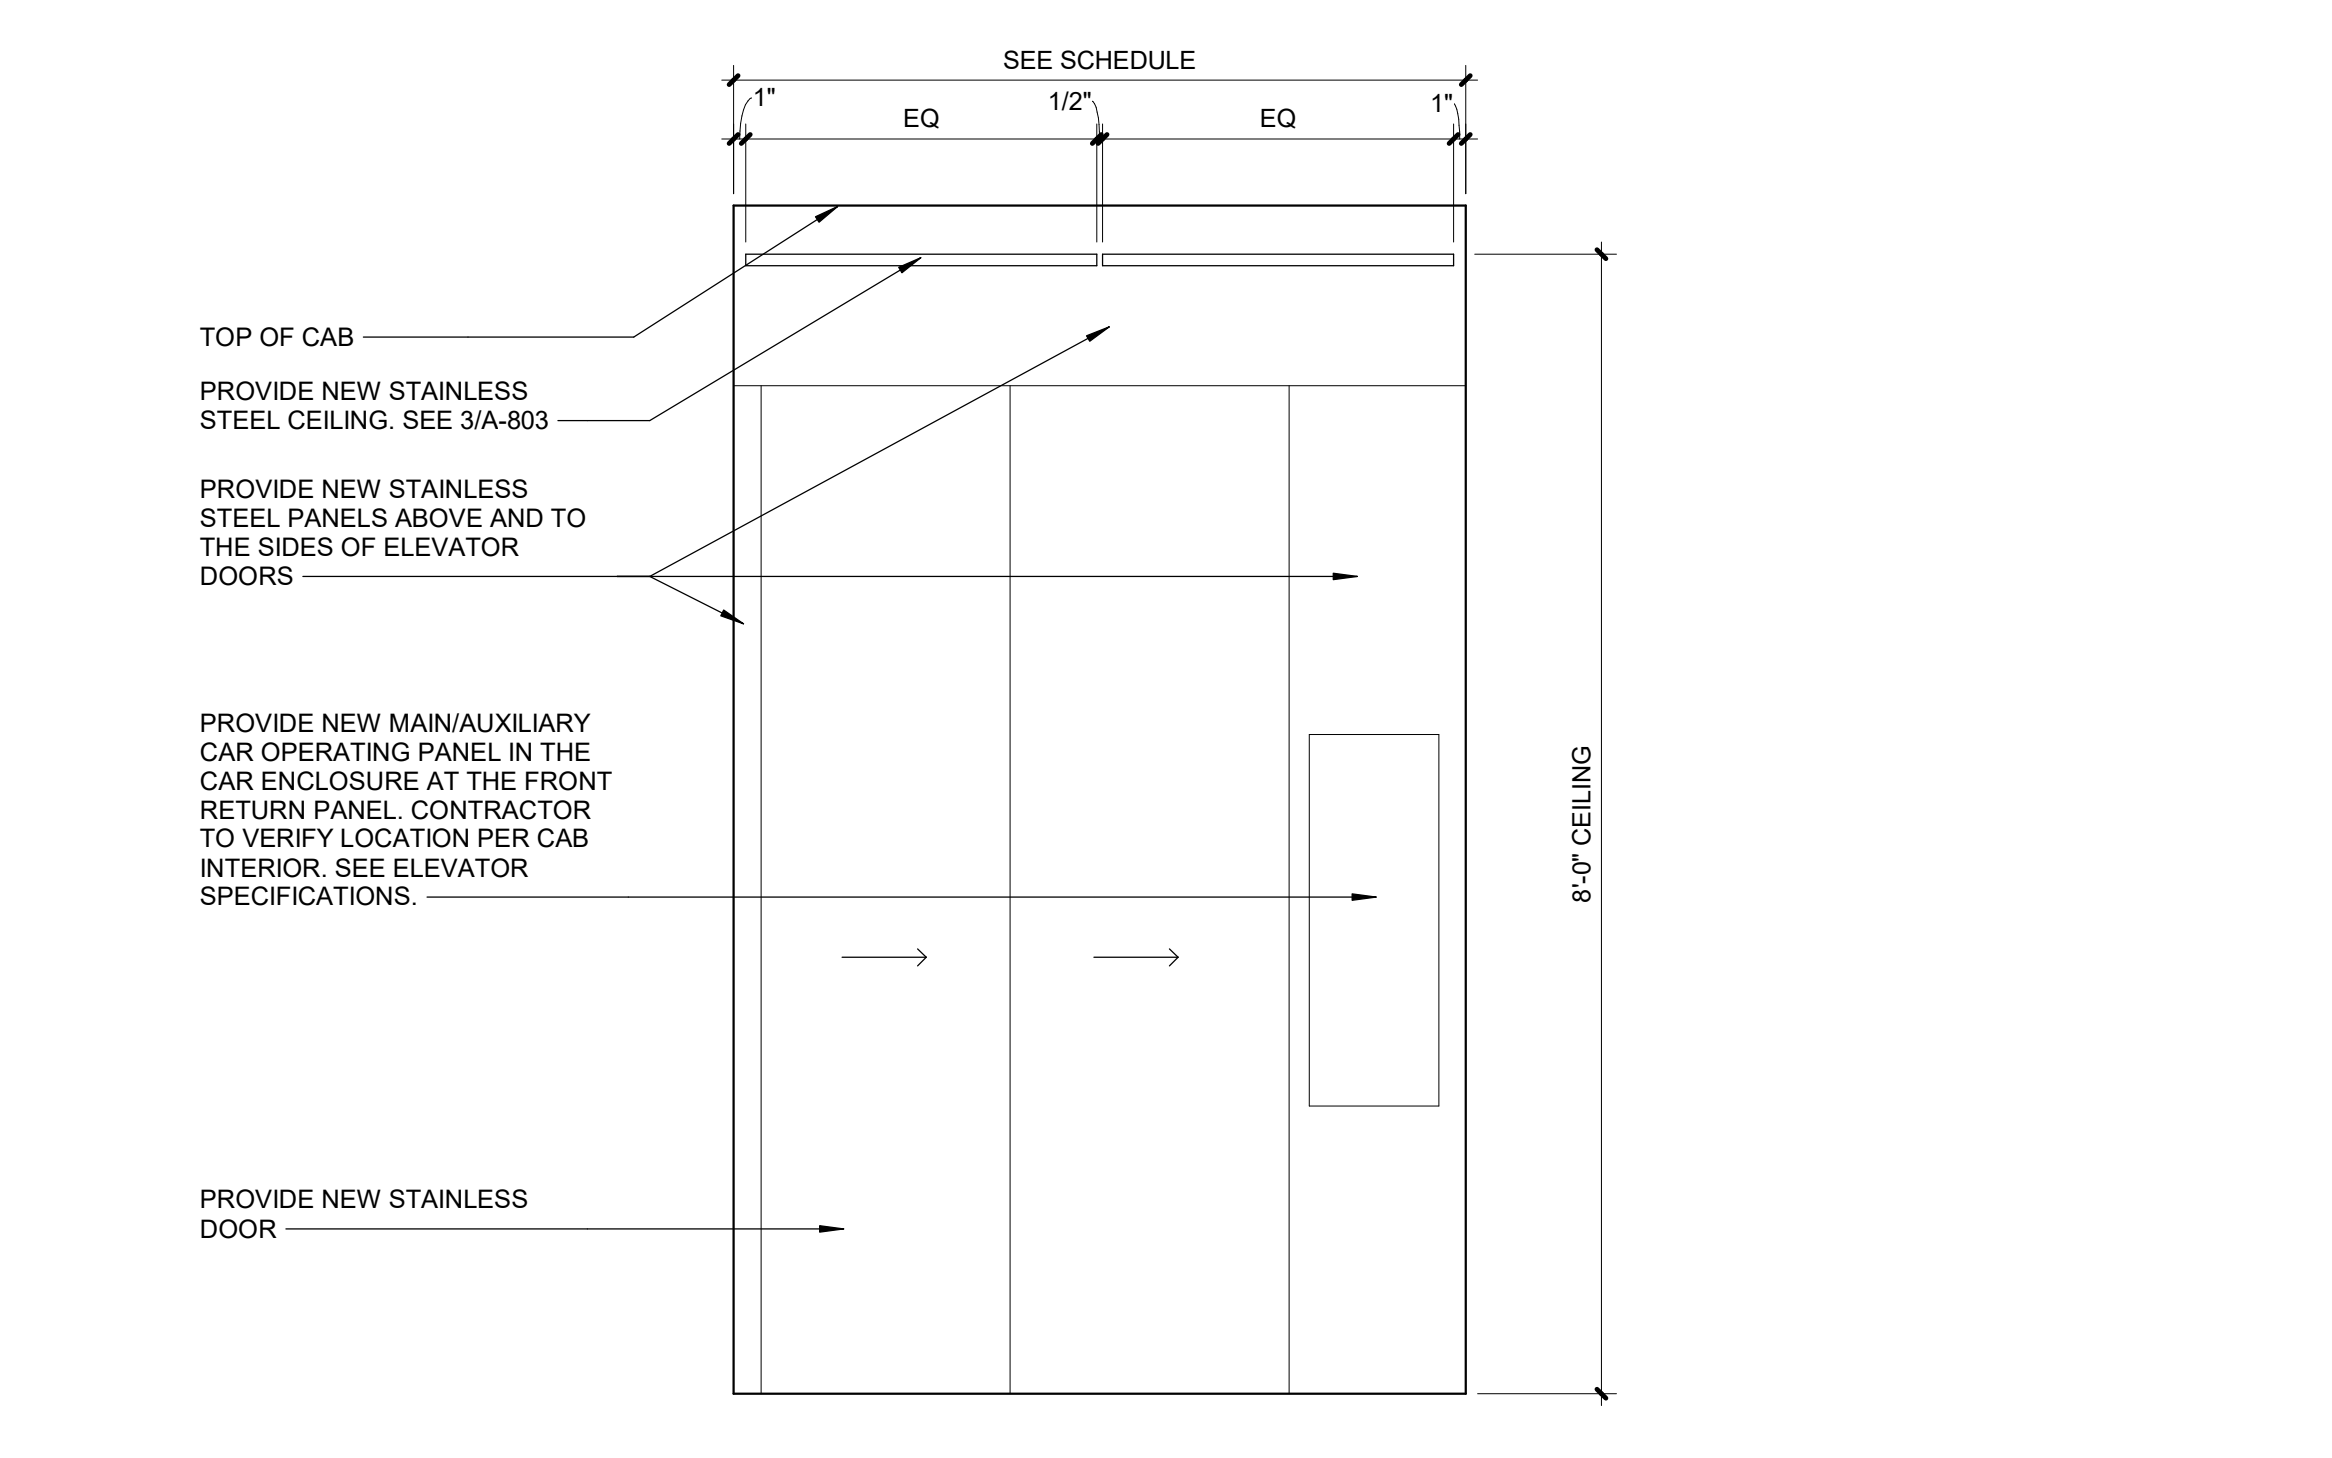


2 ELEVATOR CAB FRONT/BACK ELEVATION (P13)
Scale: 3/4" = 1'-0"

- SHEET NOTES:**
- A. ALL ELECTRICAL WORK REQUIRED BY THIS MODIFICATION IS THE RESPONSIBILITY OF THE ELEVATOR CONTRACTOR. IF ANY WORK REQUIRES A LICENSED ELECTRICIAN, THIS SHALL BE INCLUDED IN THE RESPONSIBILITY OF THE ELEVATOR COMPANY TO RETAIN AND PROVIDE SUCH AN INDIVIDUAL IF NECESSARY.
 - B. SEE ELEVATOR SCHEDULE ON A-001 FOR ADDITIONAL INFORMATION.


- KEY NOTES:**
- 1. PROVIDE NEW CAR ENCLOSURE WITH NEW FLOORING, LVT-1.

FULLY SPRINKLERED
100% BID DOCUMENTS


CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title BLDG 5 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
			ACG Project Number 21-344		Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		Location TUSCALOOSA VAMC		Approved		Building Number 5	
			Date FEBRUARY 6, 2025		Checked JK		Drawn KJC/ENP		Drawing Number A-803		Dwg 18 of 21	
# Revisions:			Date									

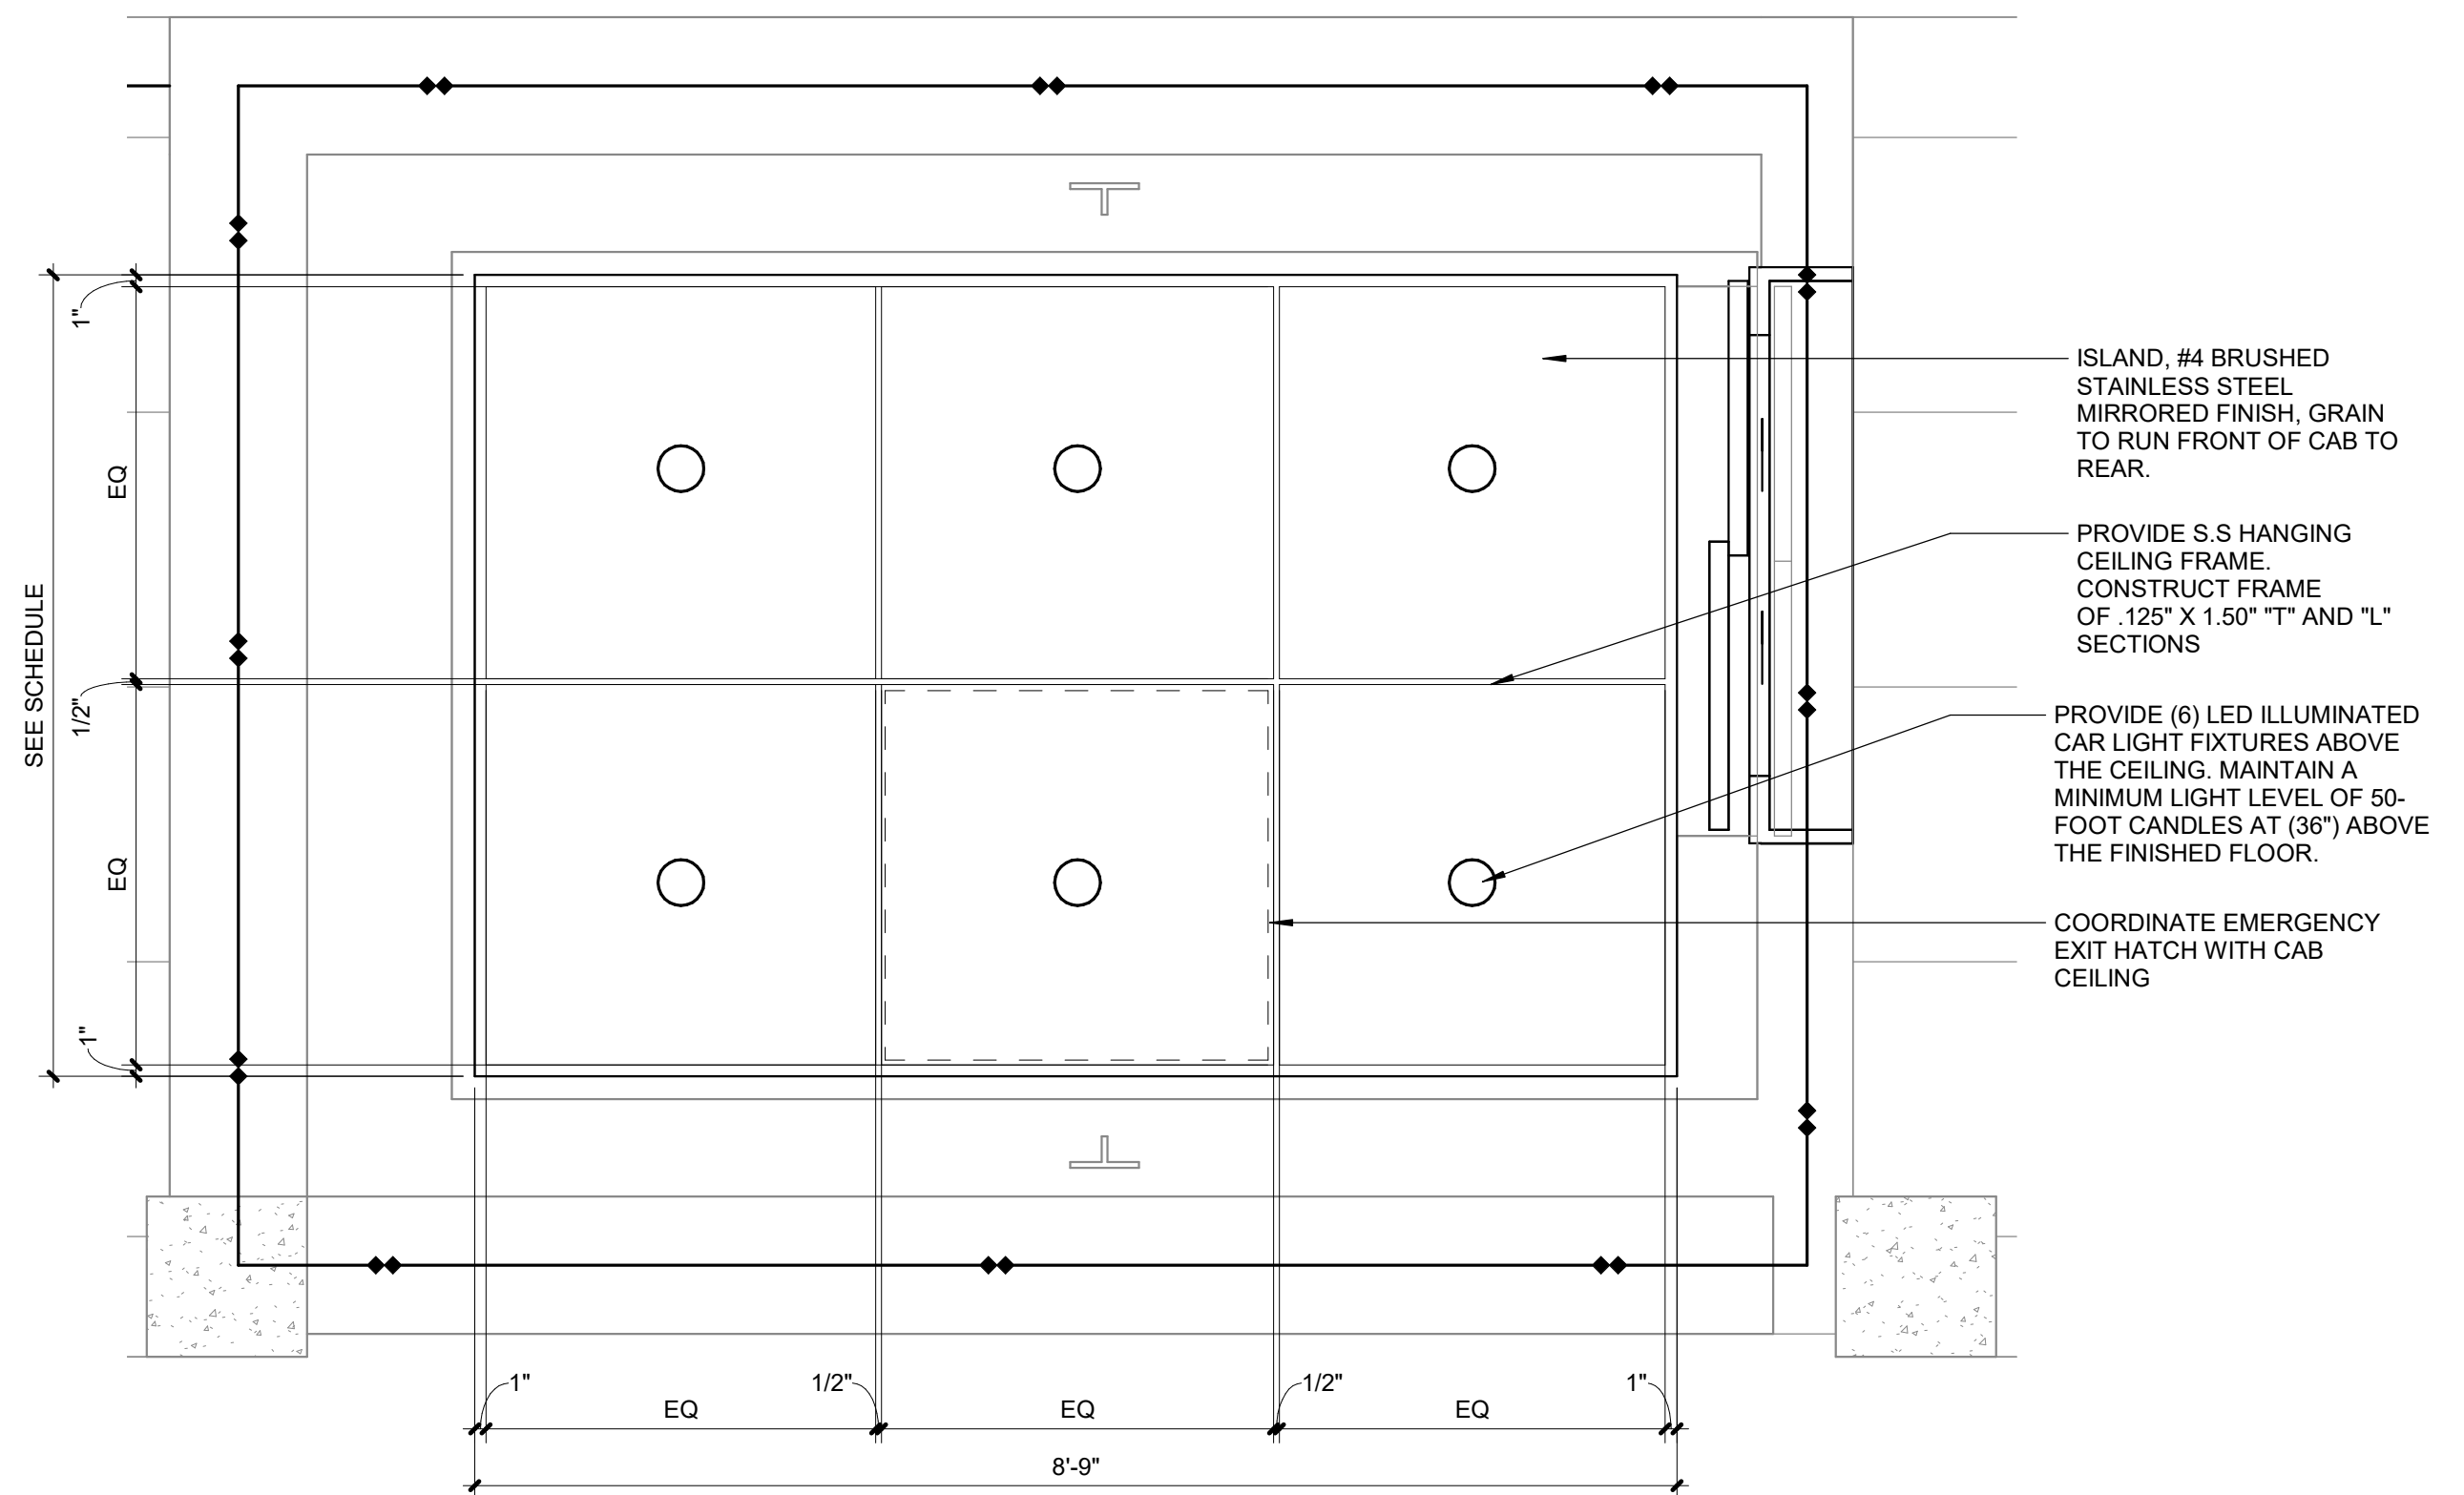


3 BUILDING 38 TYPICAL ELEVATOR REFLECTED CEILING PLAN (P6 & P7)
Scale: 3/4" = 1'-0"

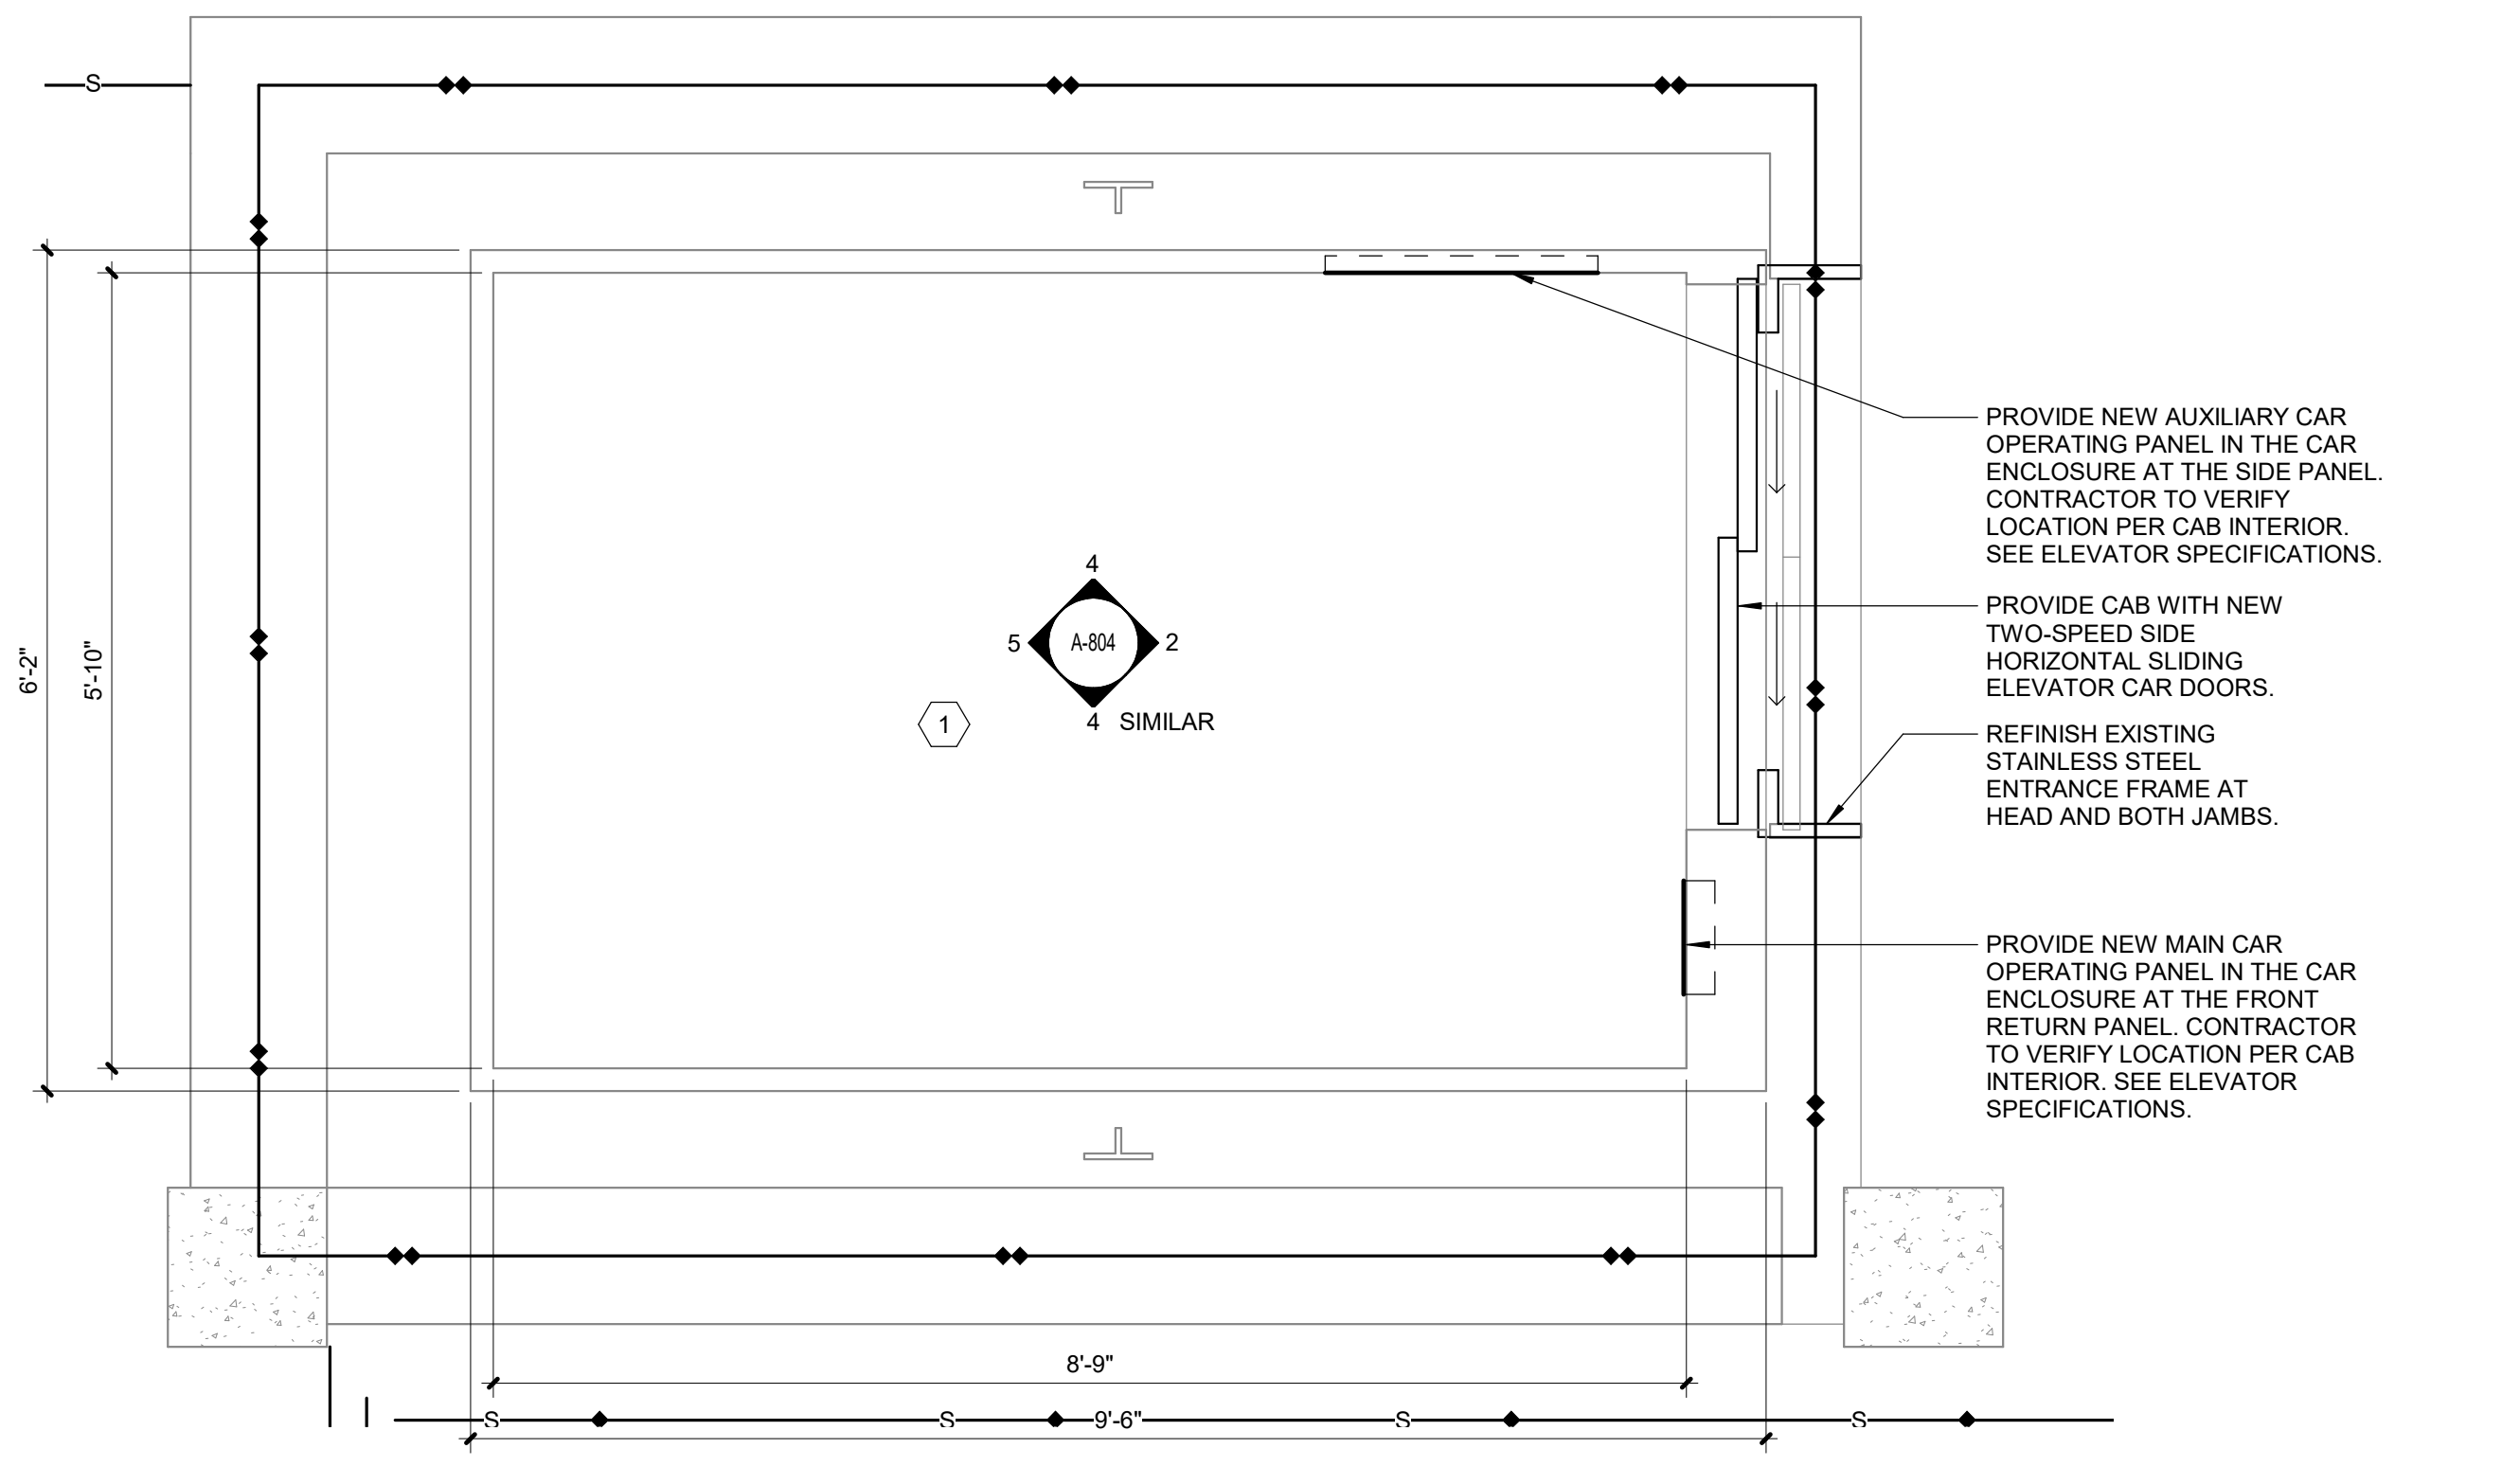


1 BUILDING 38 TYPICAL ELEVATOR FLOOR PLAN (P6 - P7)
Scale: 3/4" = 1'-0"

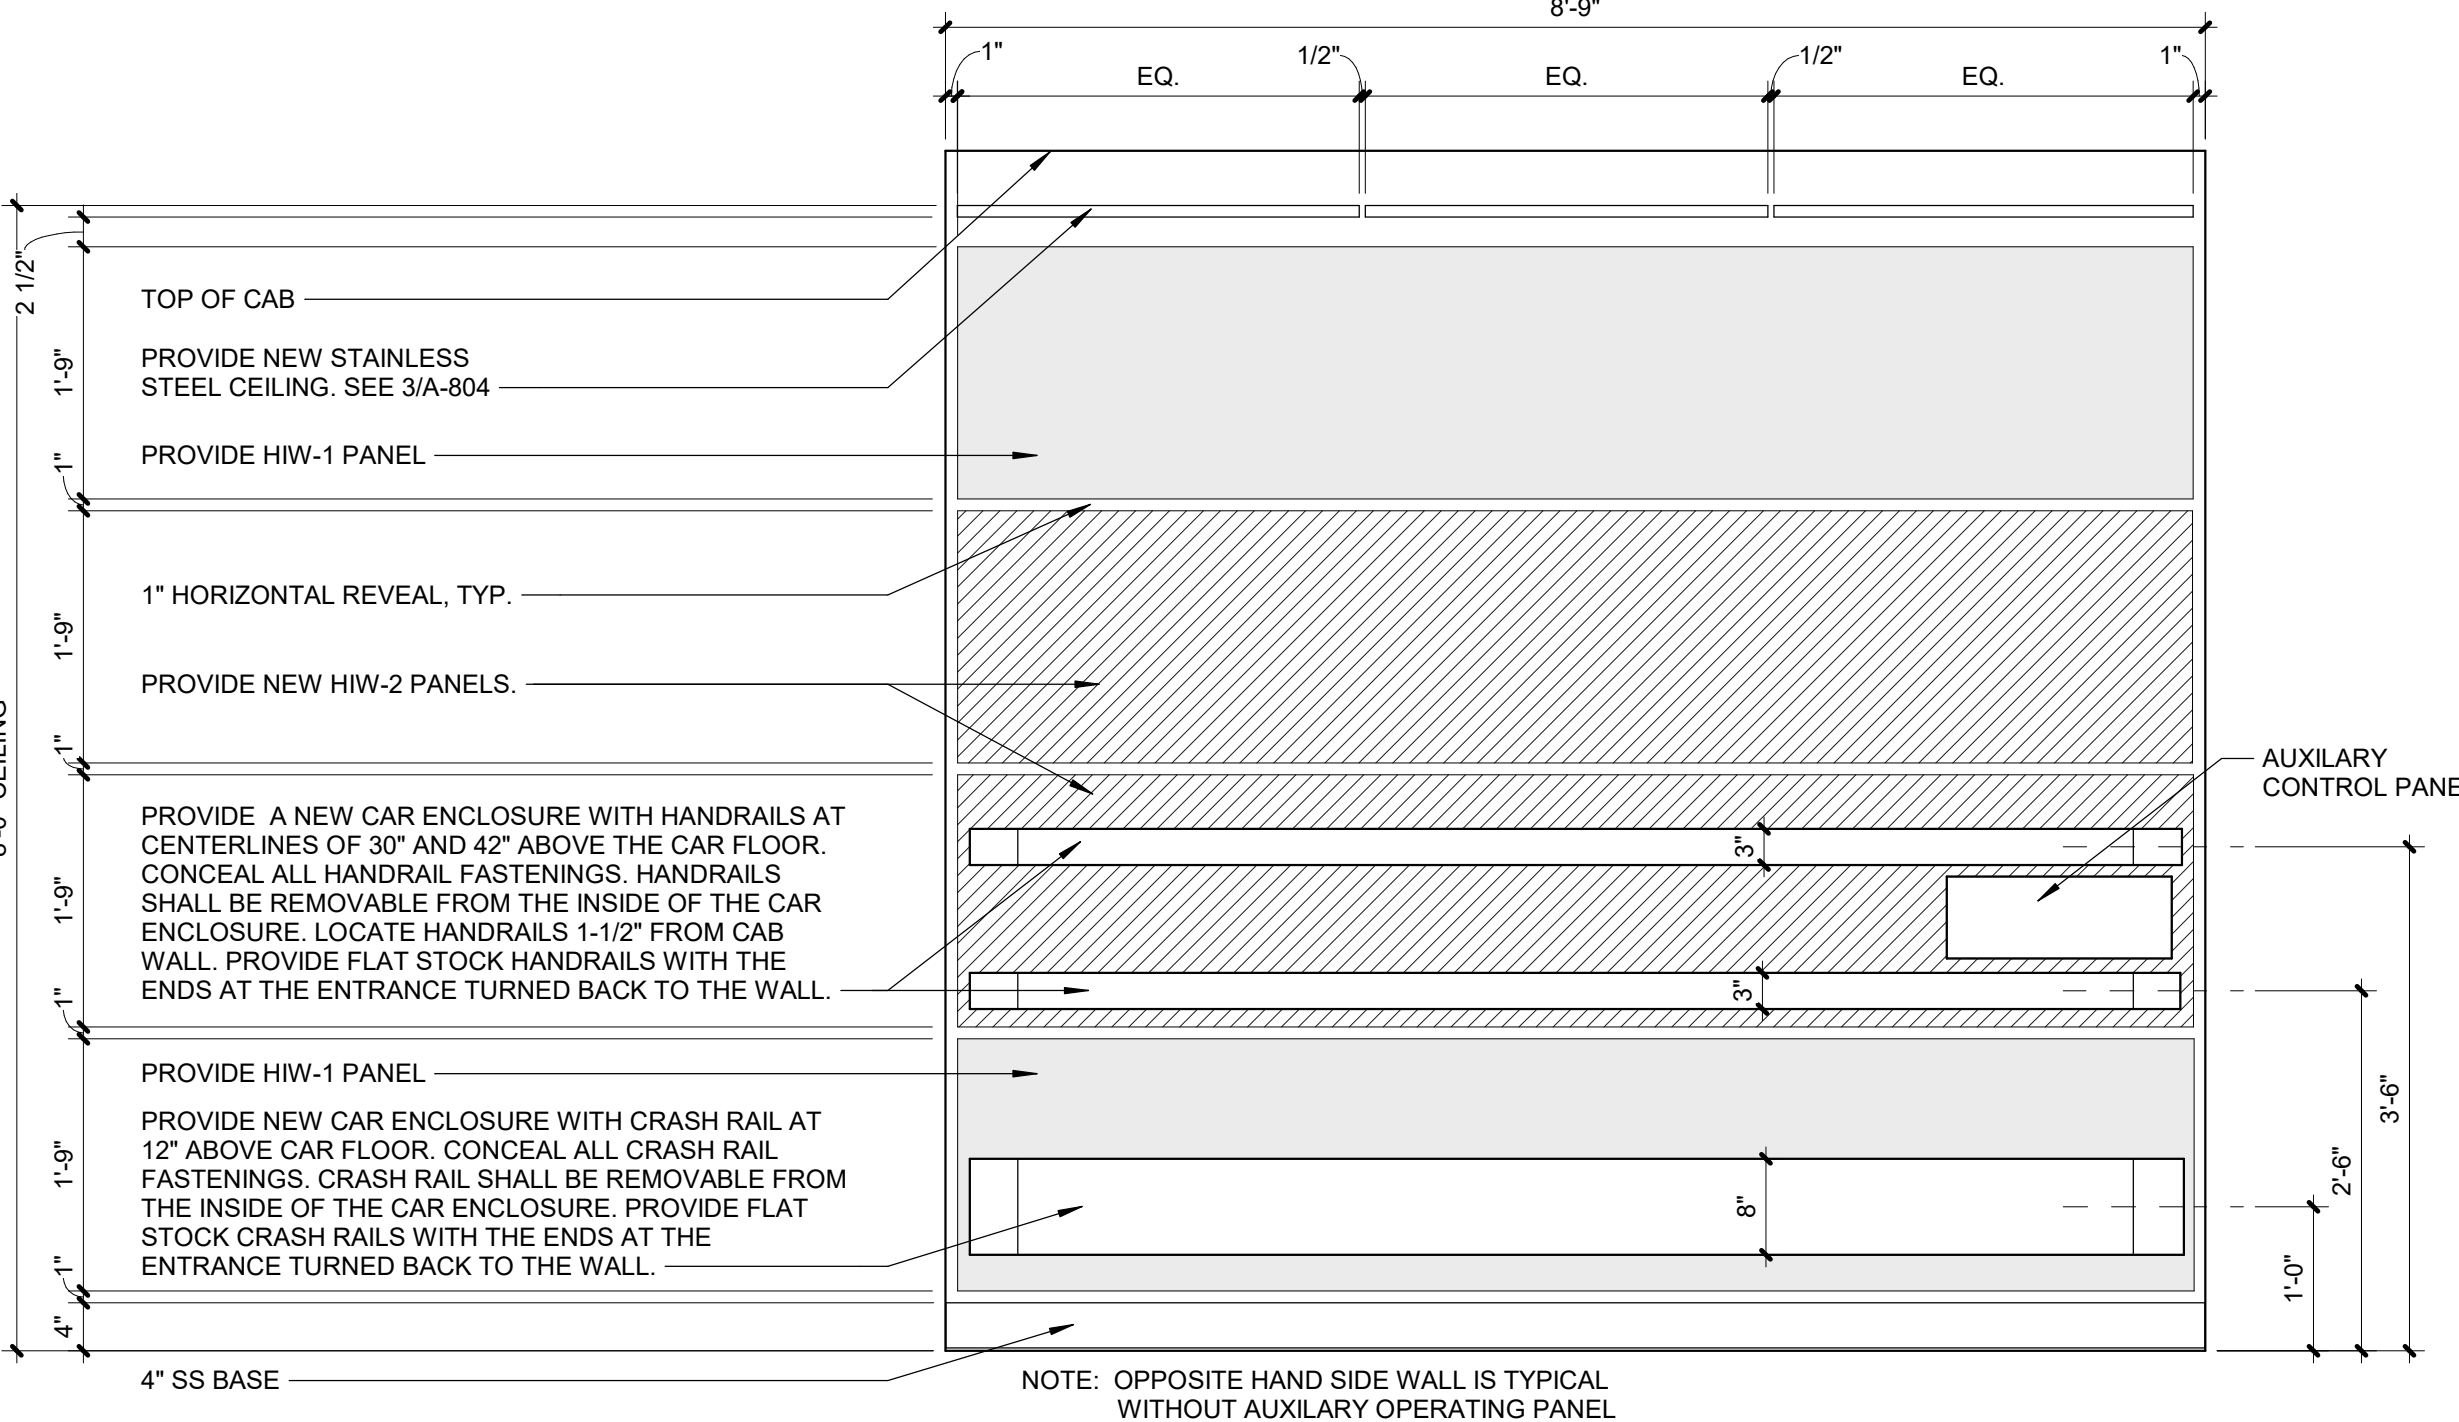

4 ELEVATOR CAB SIDE ELEVATION (P6 & P7)
Scale: 3/4" = 1'-0"

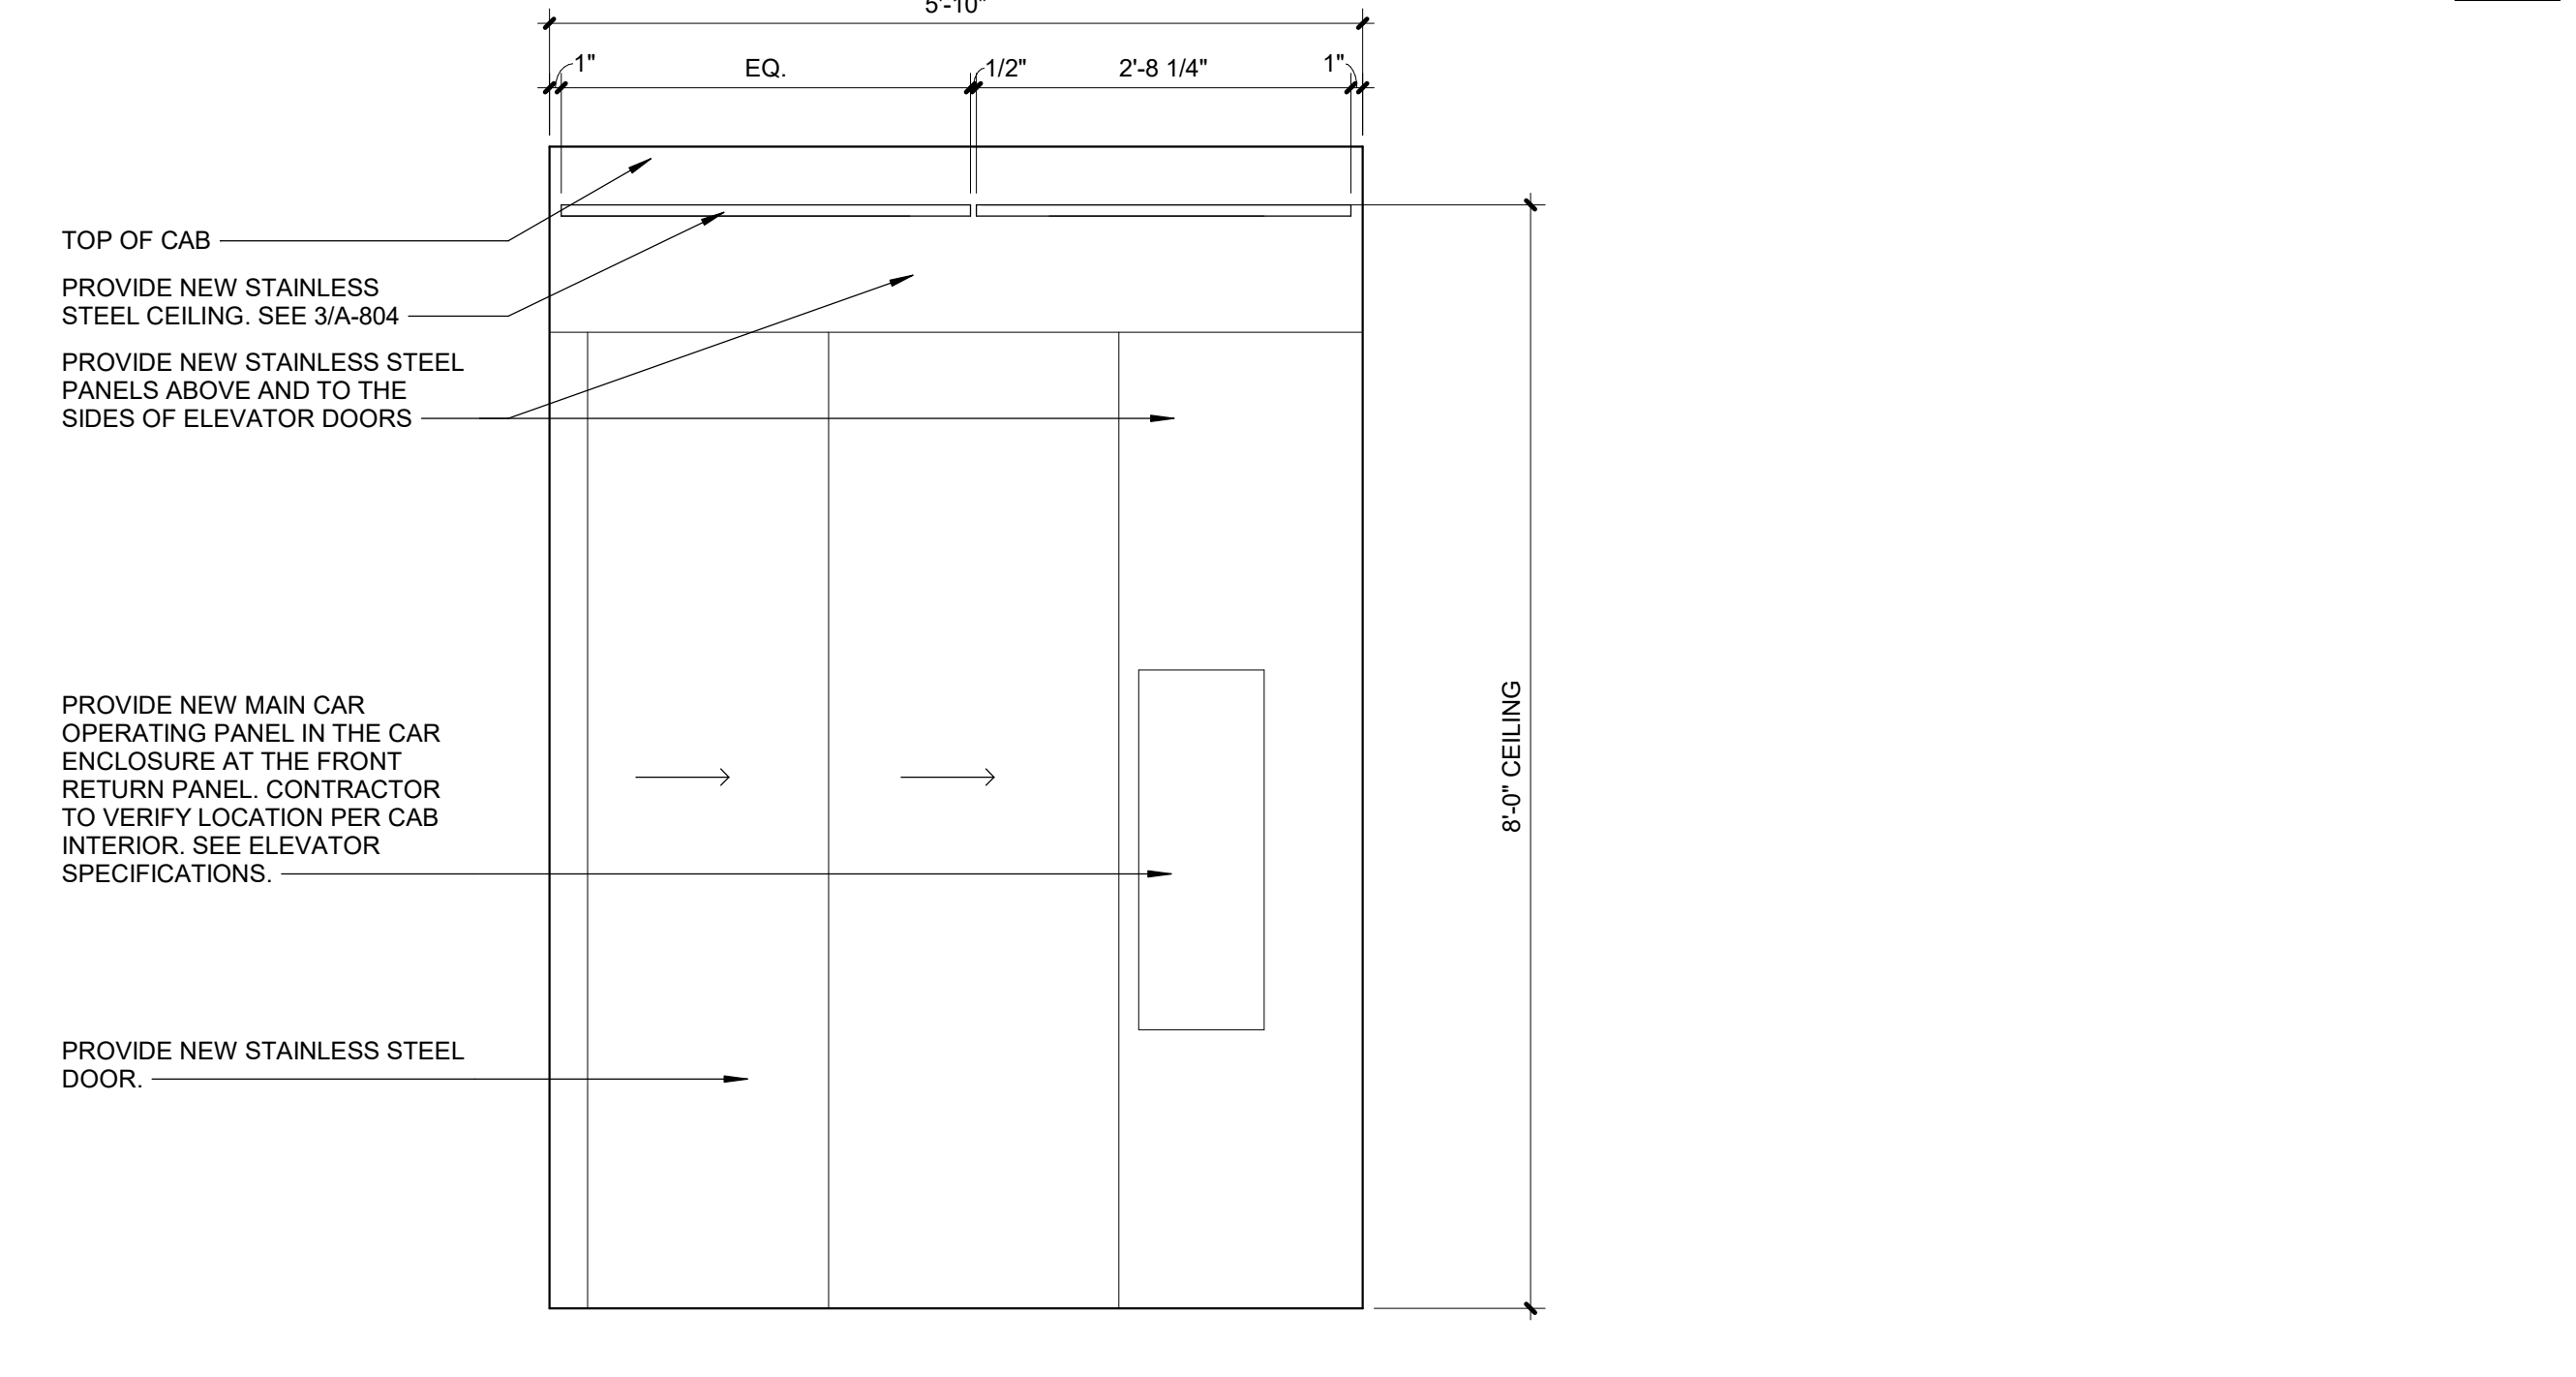

2 ELEVATOR CAB FRONT ELEVATION (P6 & P7)
Scale: 3/4" = 1'-0"

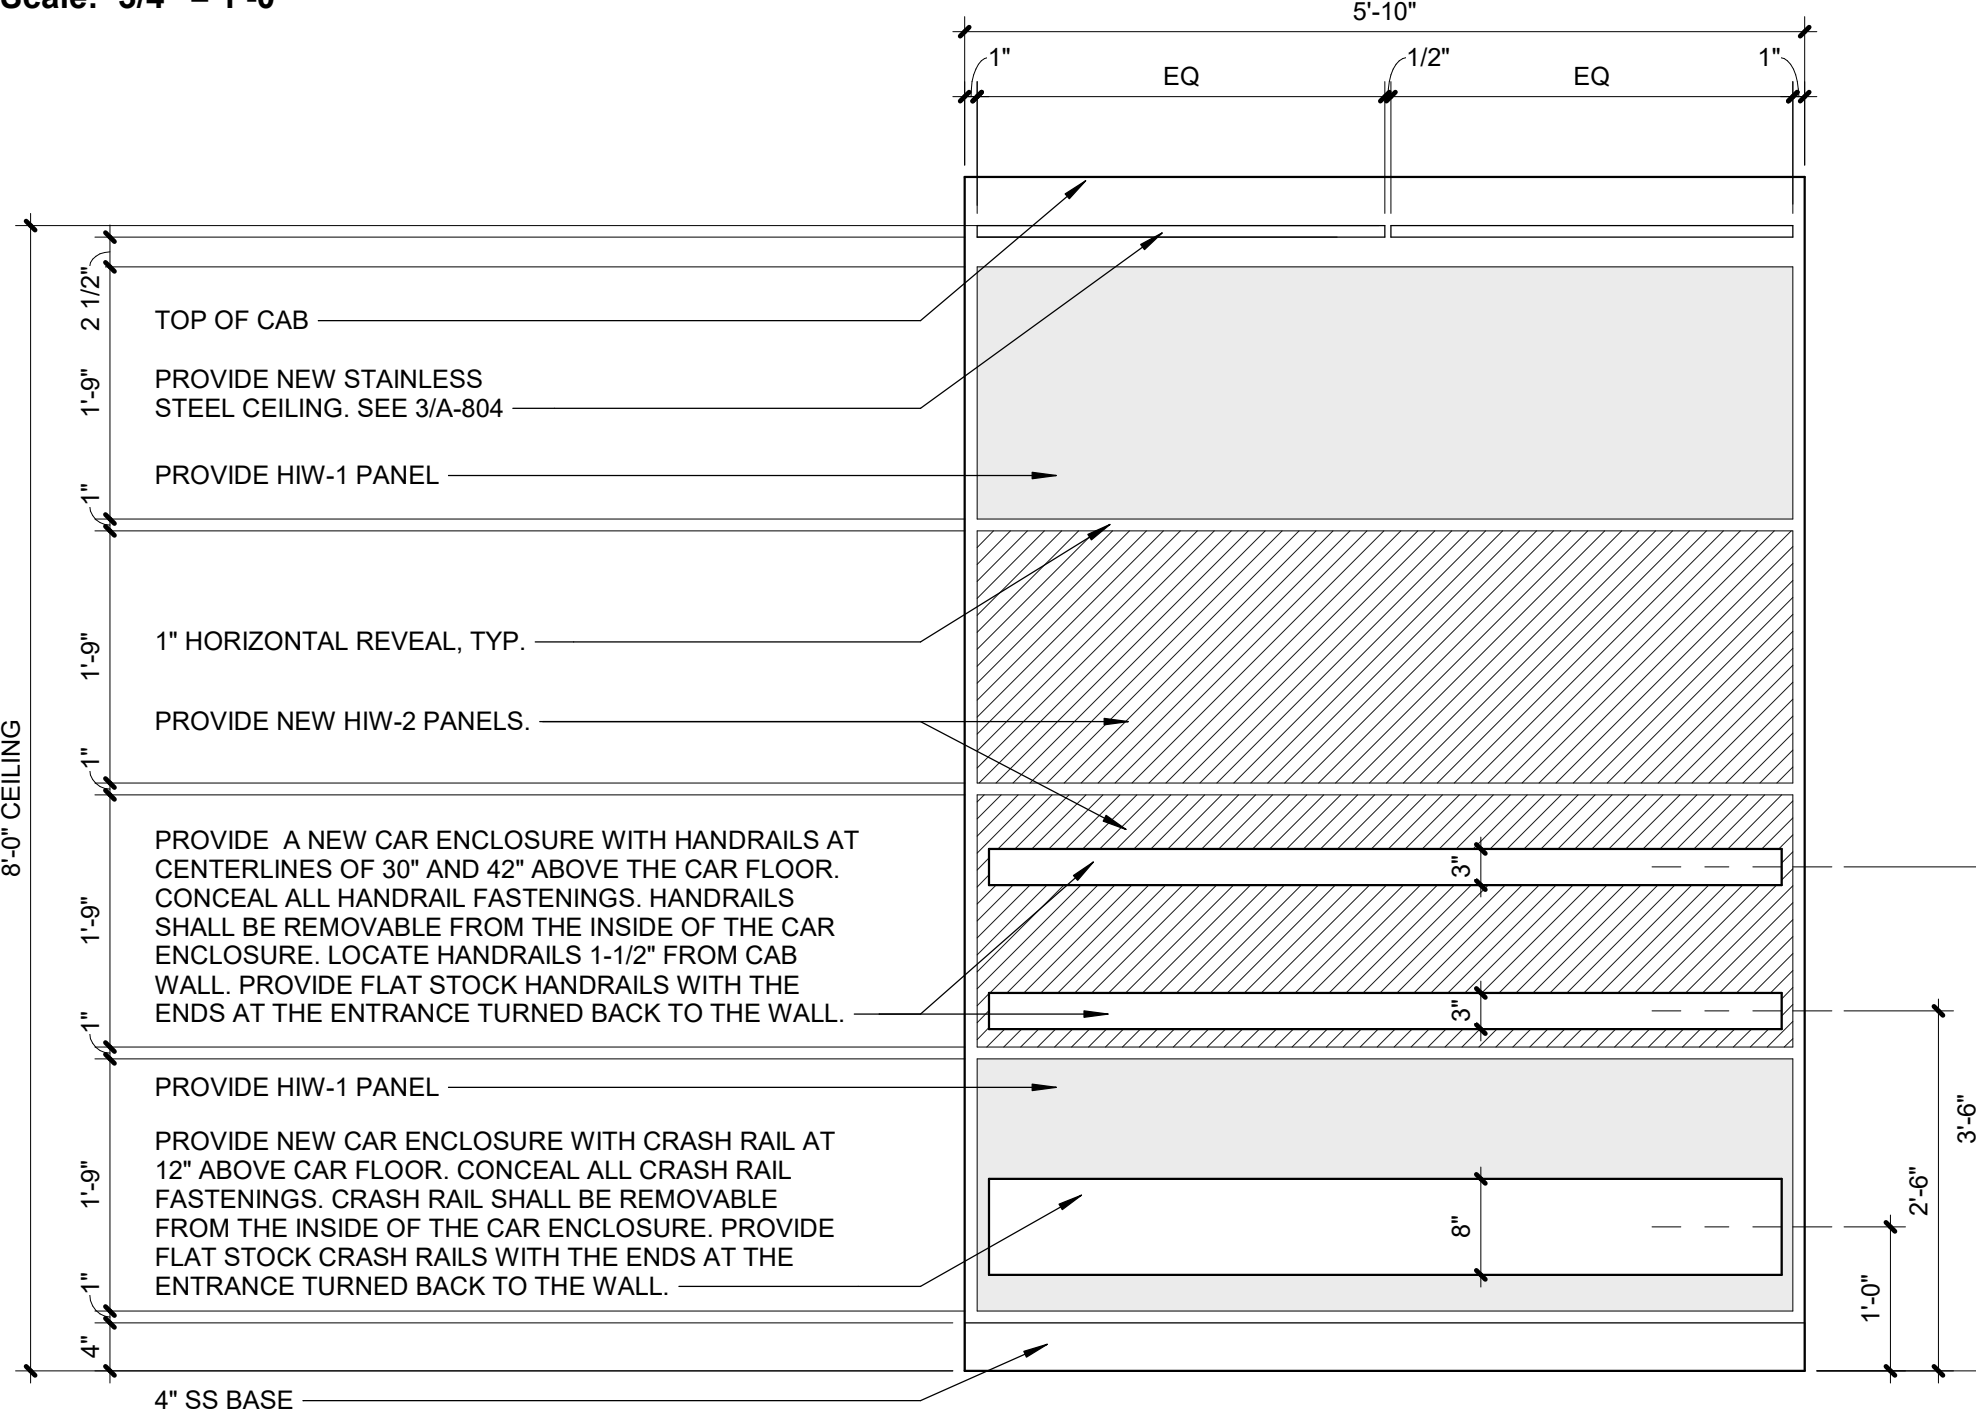

5 ELEVATOR CAB REAR ELEVATION (P6 & P7)
Scale: 3/4" = 1'-0"

SHEET NOTES:

- A. ALL ELECTRICAL WORK REQUIRED BY THIS MODIFICATION IS THE RESPONSIBILITY OF THE ELEVATOR CONTRACTOR. IF ANY WORK REQUIRES A LICENSED ELECTRICIAN, THIS SHALL BE INCLUDED IN THE RESPONSIBILITY OF THE ELEVATOR COMPANY TO RETAIN AND PROVIDE SUCH AN INDIVIDUAL IF NECESSARY.
- B. SEE ELEVATOR SCHEDULE ON A-001 FOR ADDITIONAL INFORMATION.

KEY NOTES:

- 1 PROVIDE NEW CAR ENCLOSURE WITH NEW FLOORING, LVT-1.

**FULLY SPRINKLERED
100% BID DOCUMENTS**

#	Revisions:	Date

CONSULTANTS:



PROJECT MANAGER
ACG Project Number 21-344

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511

APOGEE
Engineers | Architects
www.acg-pa.com 919-858-7420





Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans Affairs

Drawing Title BLDG 38 INTERIOR ELEVATOR TYPICAL PLAN AND ELEVATIONS
Location TUSCALOOSA VAMC

Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137
Approved FEBRUARY 6, 2025
Checked JK
Drawn KJC/ENP


VA PROJECT NUMBER 679-22-100
Building Number 38
Drawing Number A-804
Dwg 19 of 21

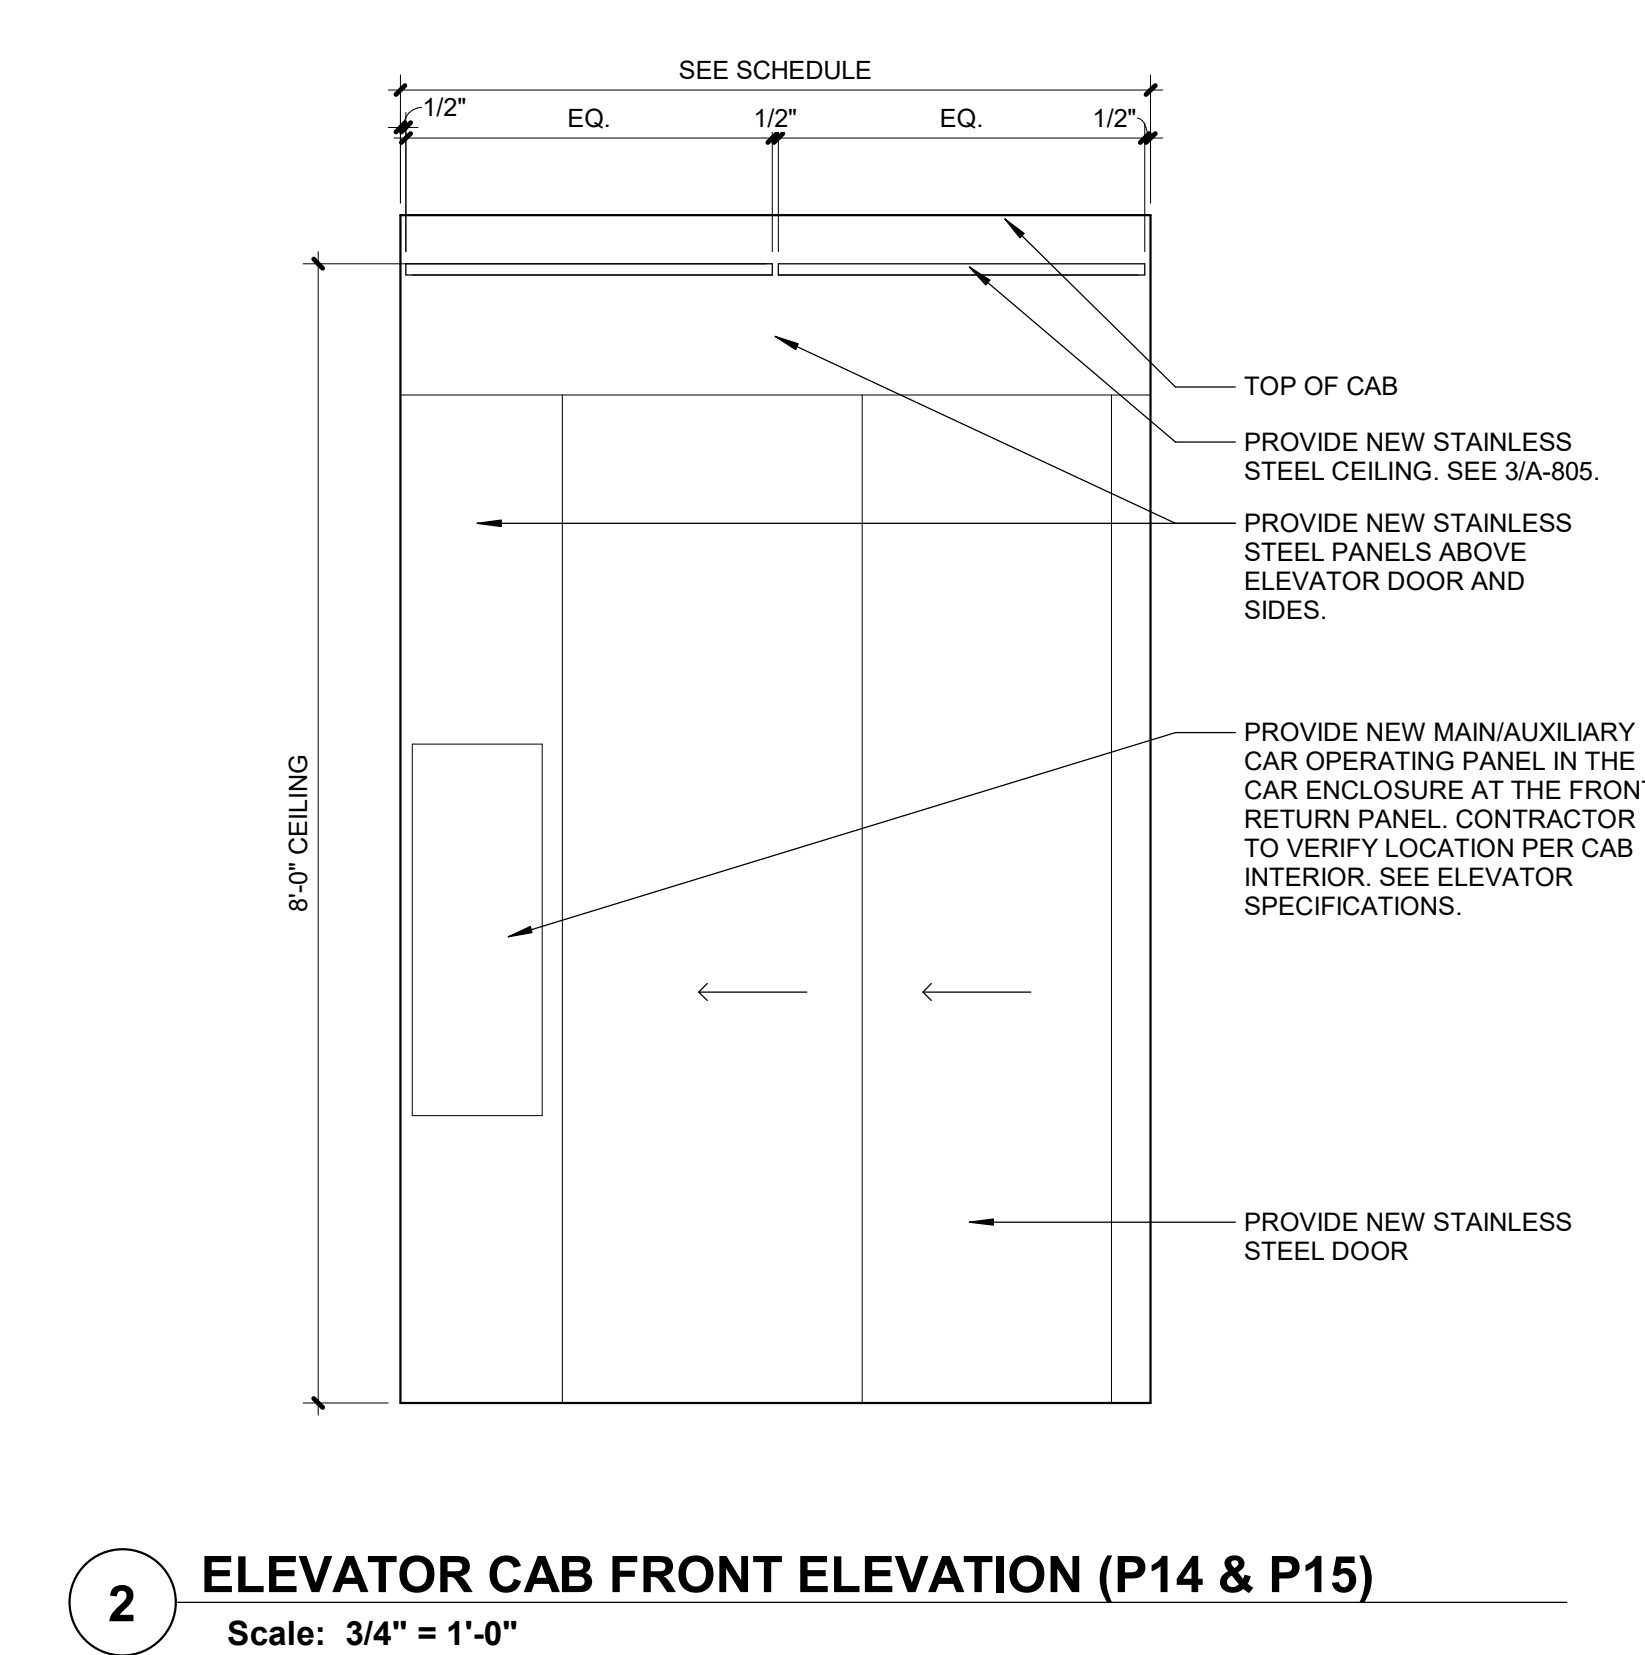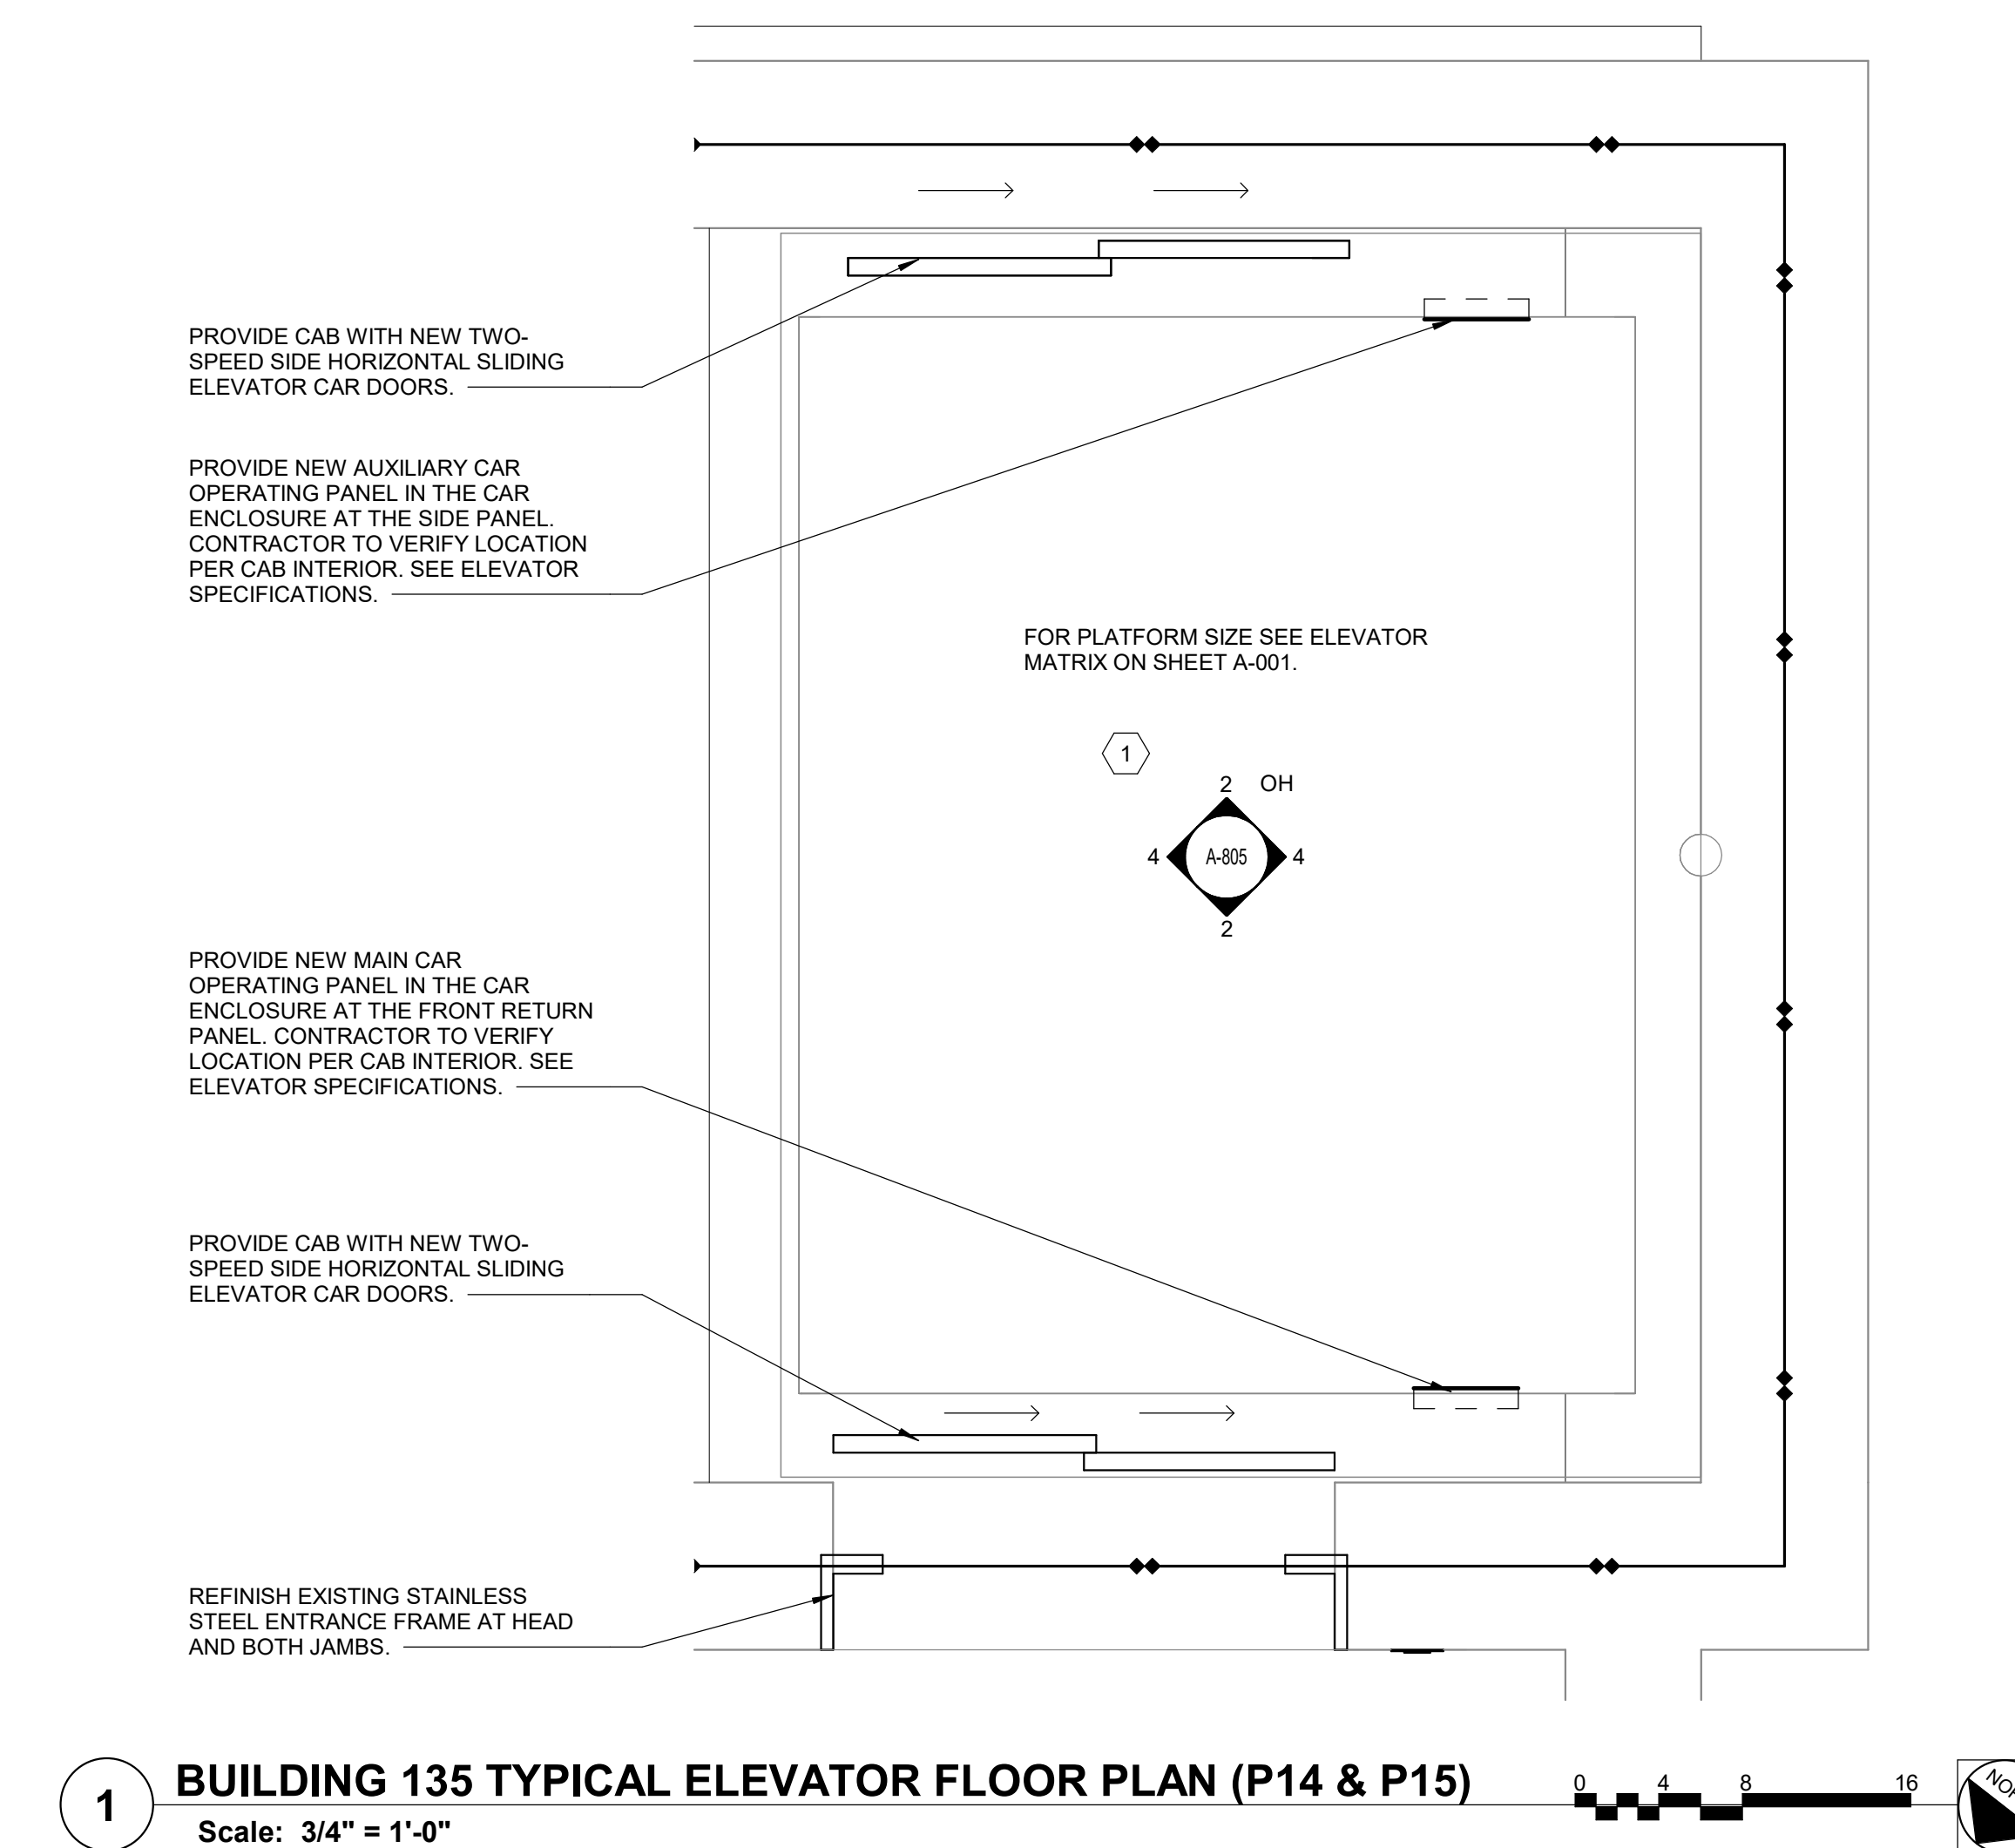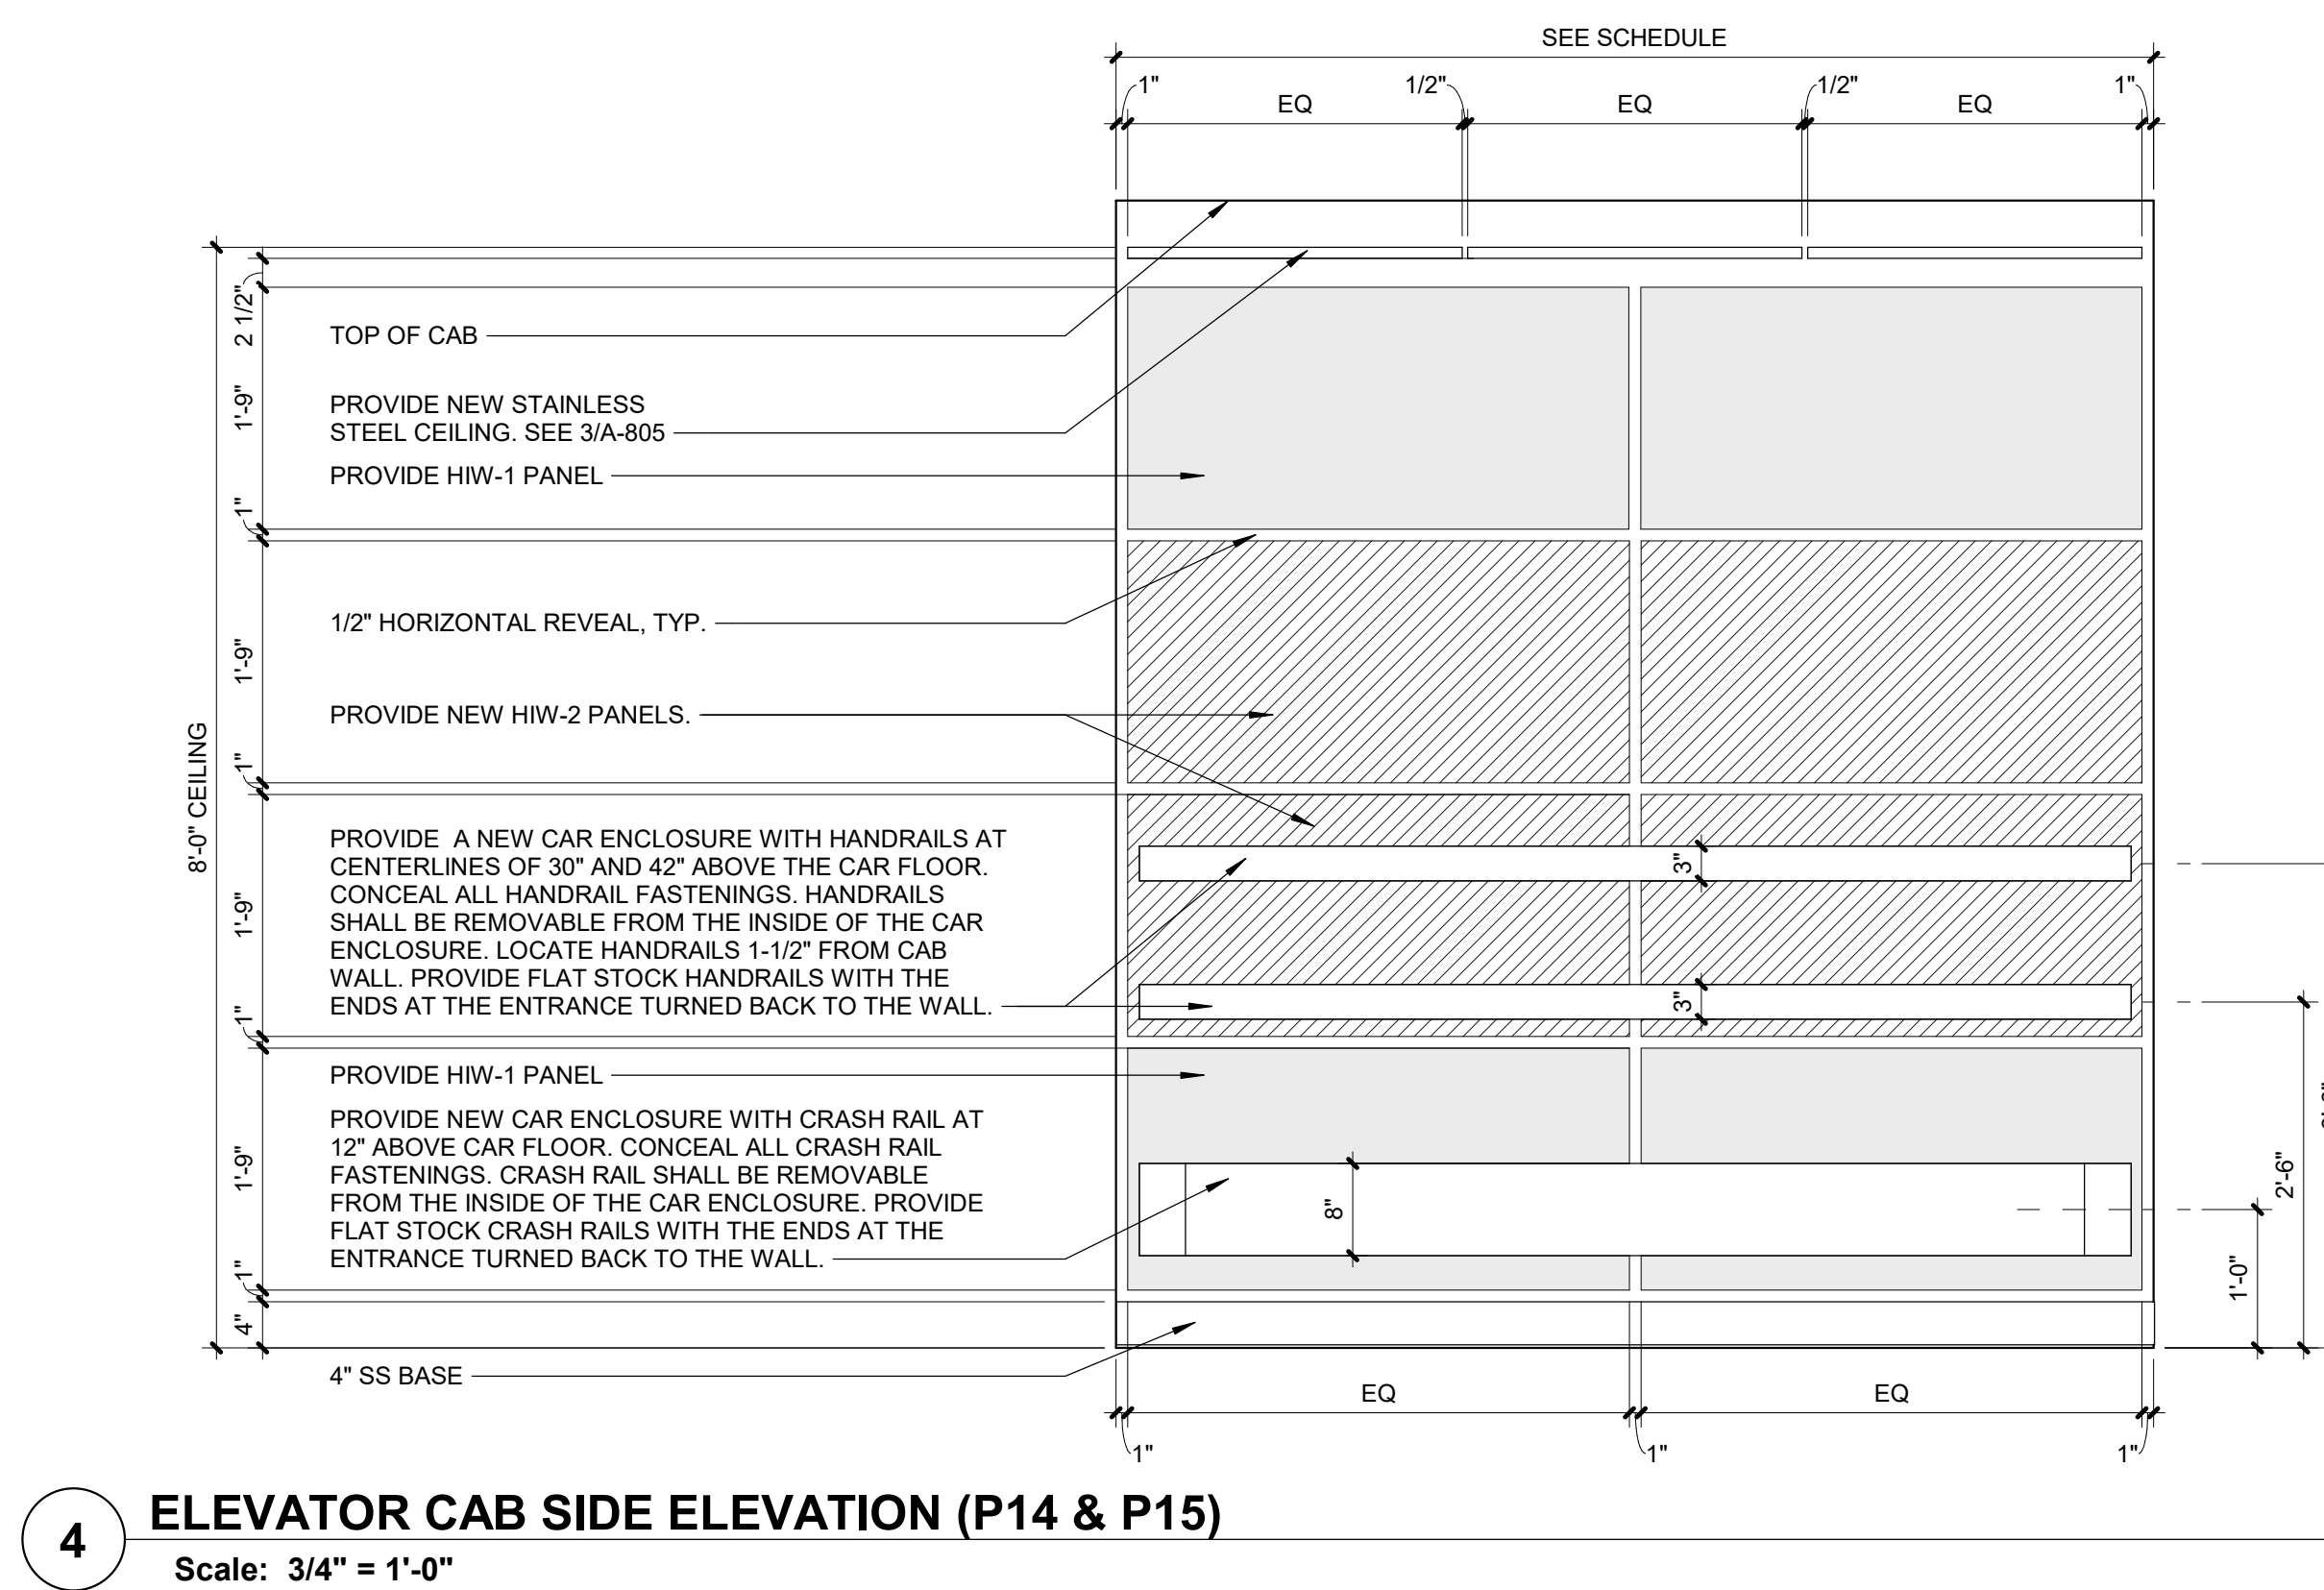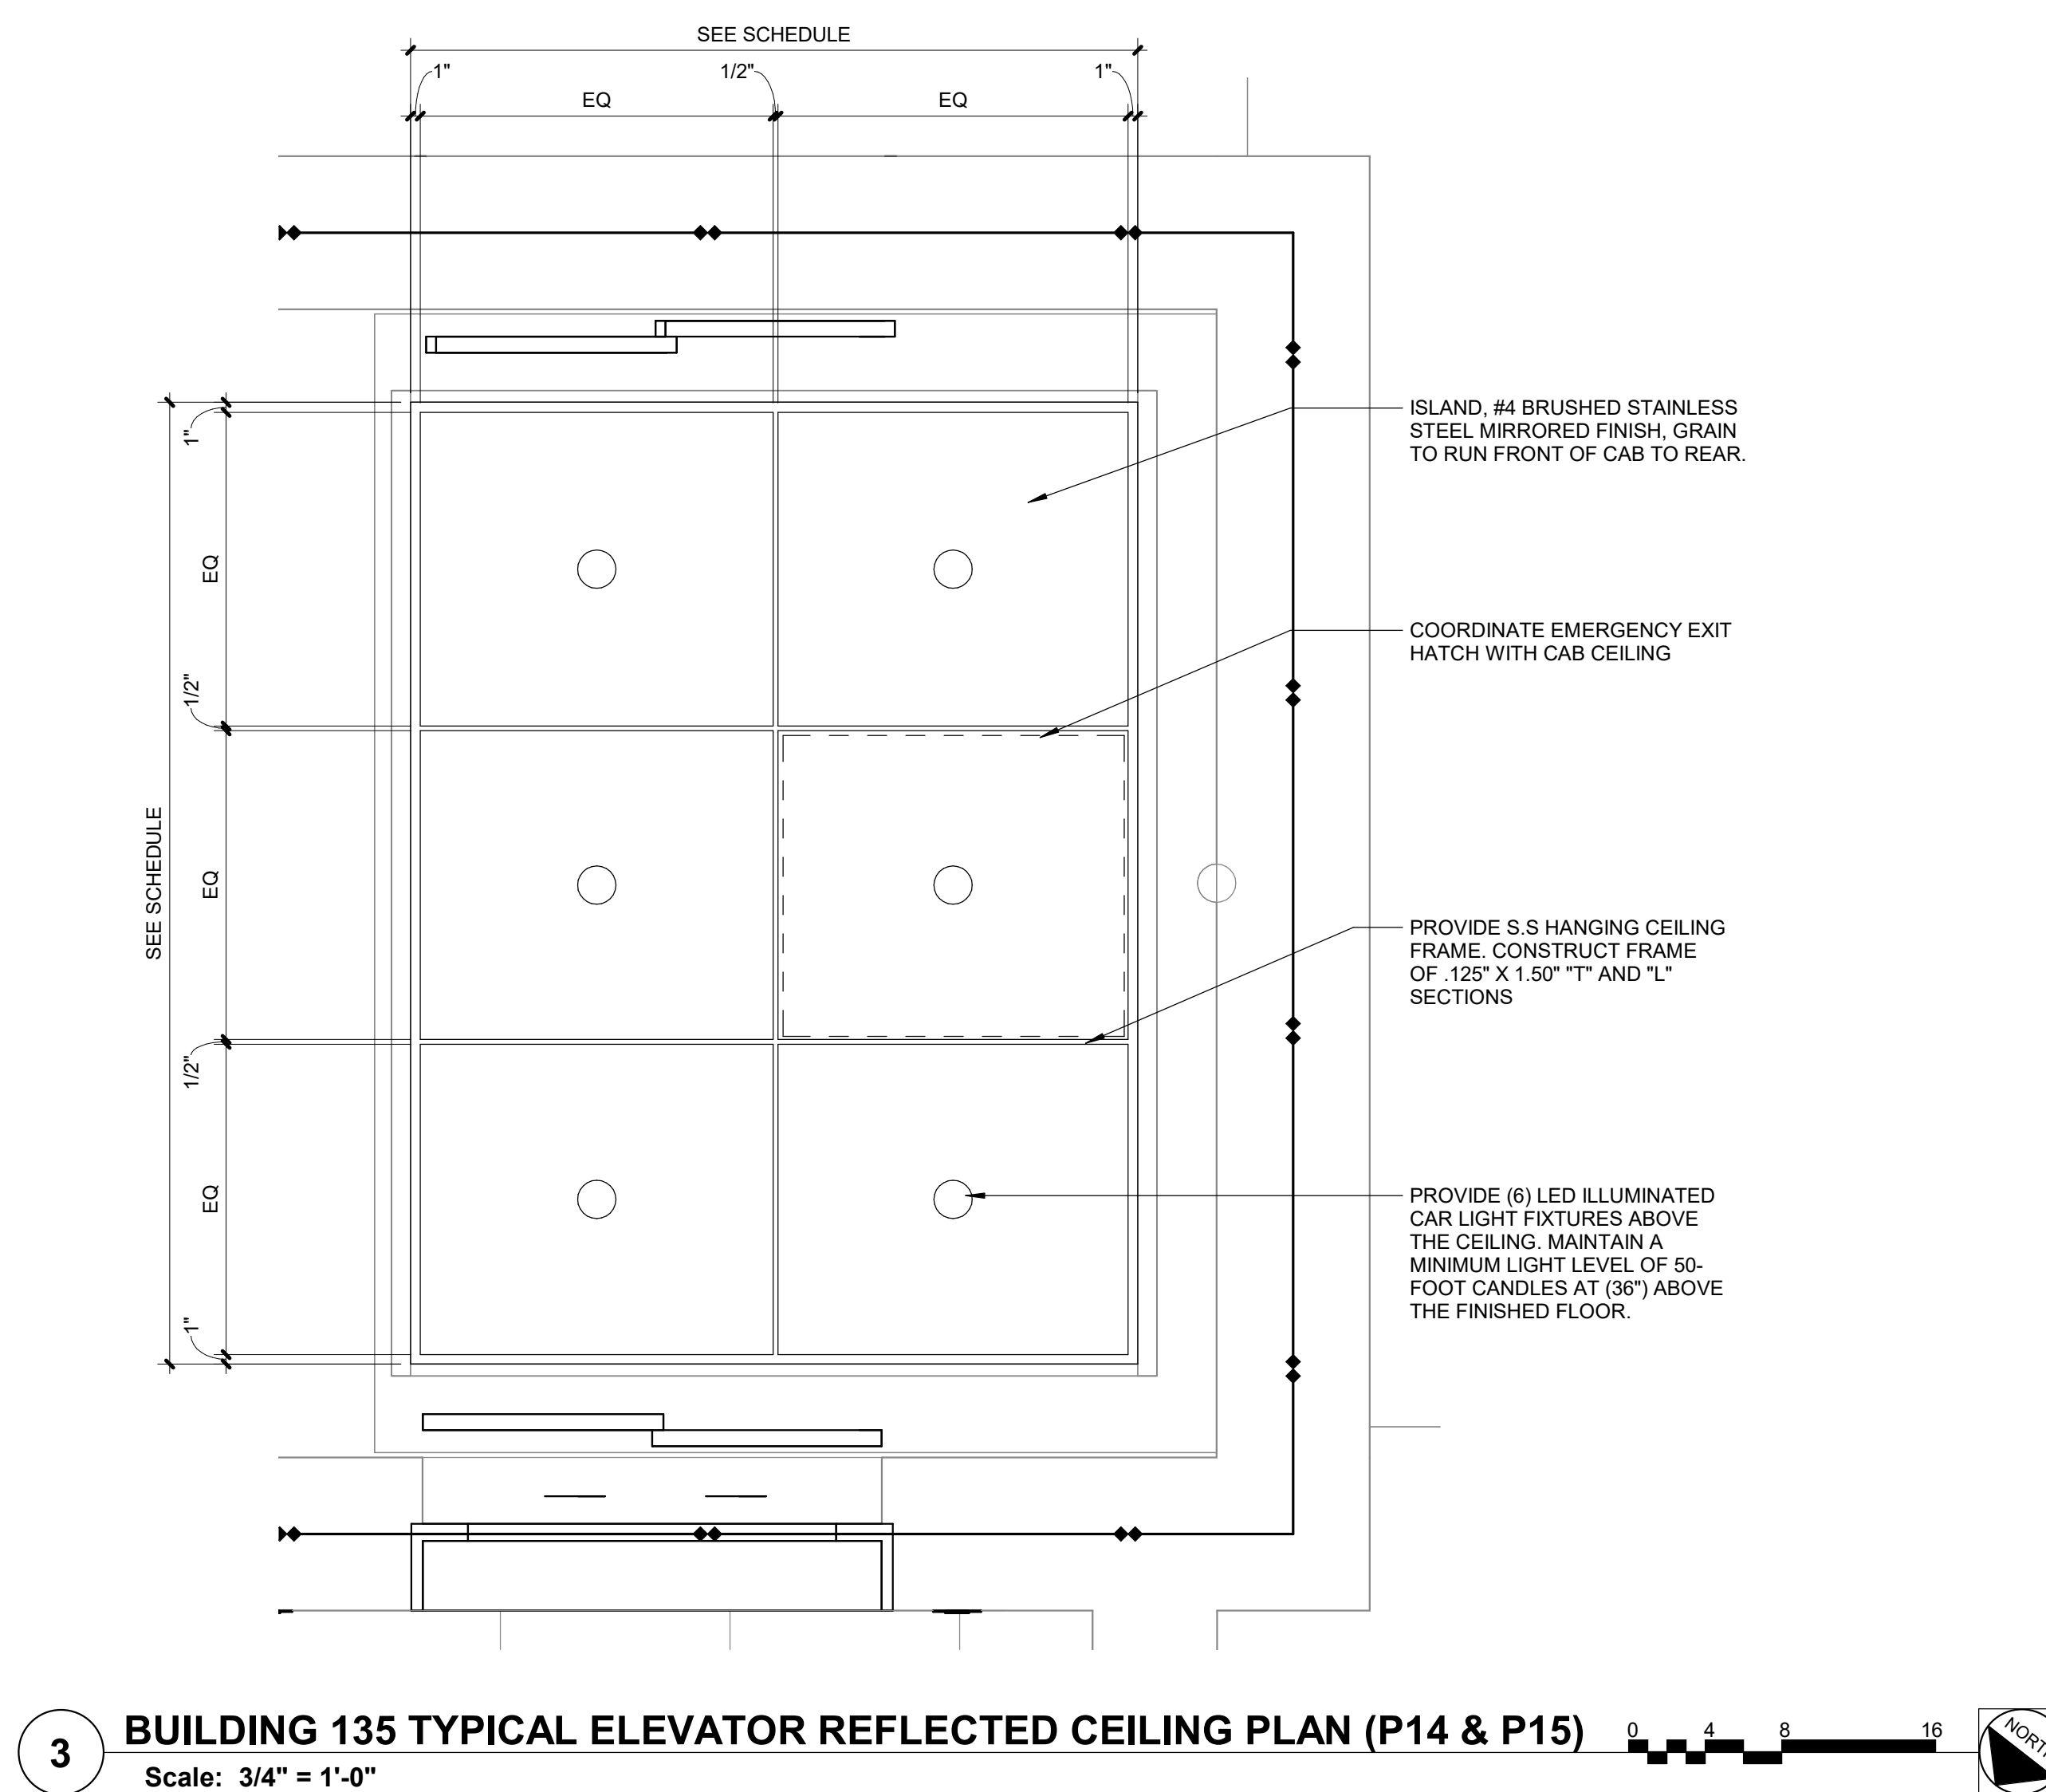

- | | |
|--|---|
| <h2 style="text-align: center;">SHEET NOTES:</h2> | |
| A. | <p>ALL ELECTRICAL WORK REQUIRED BY THIS MODIFICATION IS THE RESPONSIBILITY OF THE ELEVATOR CONTRACTOR. IF ANY WORK REQUIRES A LICENSED ELECTRICIAN, THIS SHALL BE INCLUDED IN THE RESPONSIBILITY OF THE ELEVATOR COMPANY TO RETAIN AND PROVIDE SUCH AN INDIVIDUAL IF NECESSARY.</p> |
| B. | <p>SEE ELEVATOR SCHEDULE ON A-001 FOR ADDITIONAL INFORMATION.</p> |
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 40px; height: 40px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 10px; height: 10px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 5px; height: 5px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 2px; height: 2px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 1px; height: 1px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.5px; height: 0.5px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.2px; height: 0.2px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.1px; height: 0.1px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.05px; height: 0.05px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.02px; height: 0.02px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.01px; height: 0.01px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.005px; height: 0.005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.002px; height: 0.002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.001px; height: 0.001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0005px; height: 0.0005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0002px; height: 0.0002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0001px; height: 0.0001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00005px; height: 0.00005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00002px; height: 0.00002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00001px; height: 0.00001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000005px; height: 0.000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000002px; height: 0.000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000001px; height: 0.000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000005px; height: 0.0000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000002px; height: 0.0000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000001px; height: 0.0000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000005px; height: 0.00000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000002px; height: 0.00000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000001px; height: 0.00000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000005px; height: 0.000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000002px; height: 0.000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000001px; height: 0.000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000005px; height: 0.0000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000002px; height: 0.0000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000001px; height: 0.0000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000005px; height: 0.00000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000002px; height: 0.00000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000001px; height: 0.00000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000005px; height: 0.000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000002px; height: 0.000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000001px; height: 0.000000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000000005px; height: 0.0000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000000002px; height: 0.0000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000000001px; height: 0.0000000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000000005px; height: 0.00000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000000002px; height: 0.00000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000000001px; height: 0.00000000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000000005px; height: 0.000000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000000002px; height: 0.000000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000000001px; height: 0.000000000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000000000005px; height: 0.0000000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000000000002px; height: 0.0000000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.0000000000000001px; height: 0.0000000000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000000000005px; height: 0.00000000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000000000002px; height: 0.00000000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.00000000000000001px; height: 0.00000000000000001px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000000000005px; height: 0.000000000000000005px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000000000002px; height: 0.000000000000000002px; display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 0.000000000000000001px; height: 0.000000000000000001px; display: flex; align-items: center; justify-content: center;"> </div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div> | |


FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

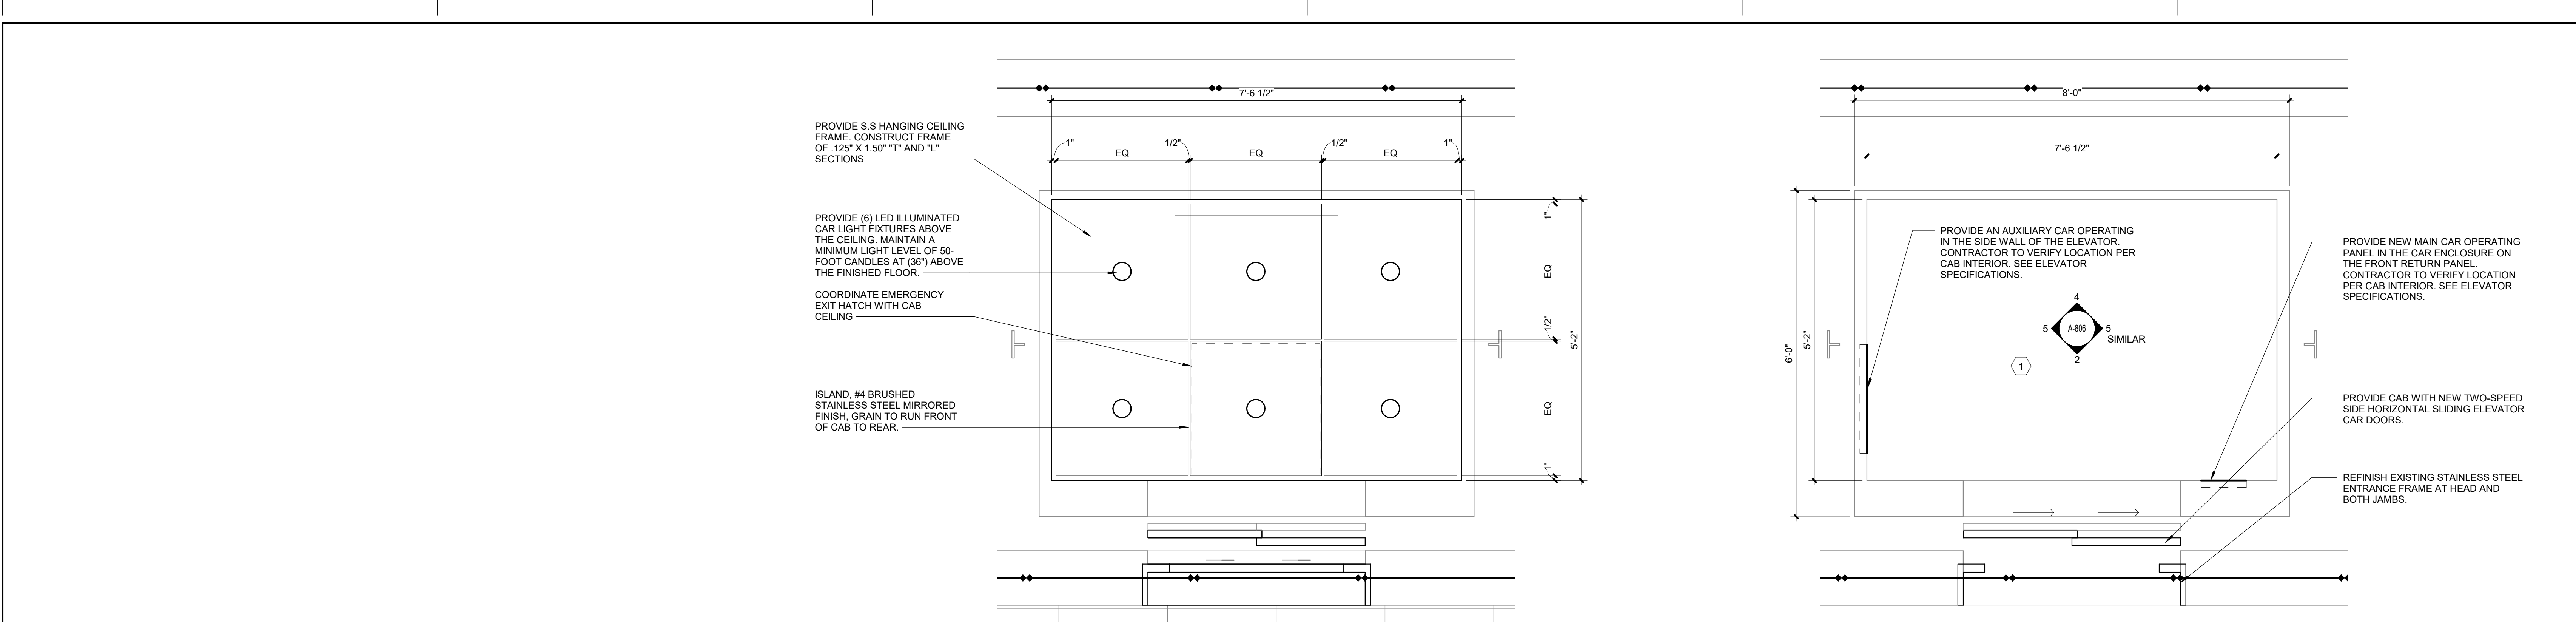


3 BUILDING 137 TYPICAL ELEVATOR REFLECTED CEILING PLAN (P17 - P19)
Scale: 3/4" = 1'-0"


1 BUILDING 137 TYPICAL ELEVATOR FLOOR PLAN (P17 - P19)
Scale: 3/4" = 1'-0"

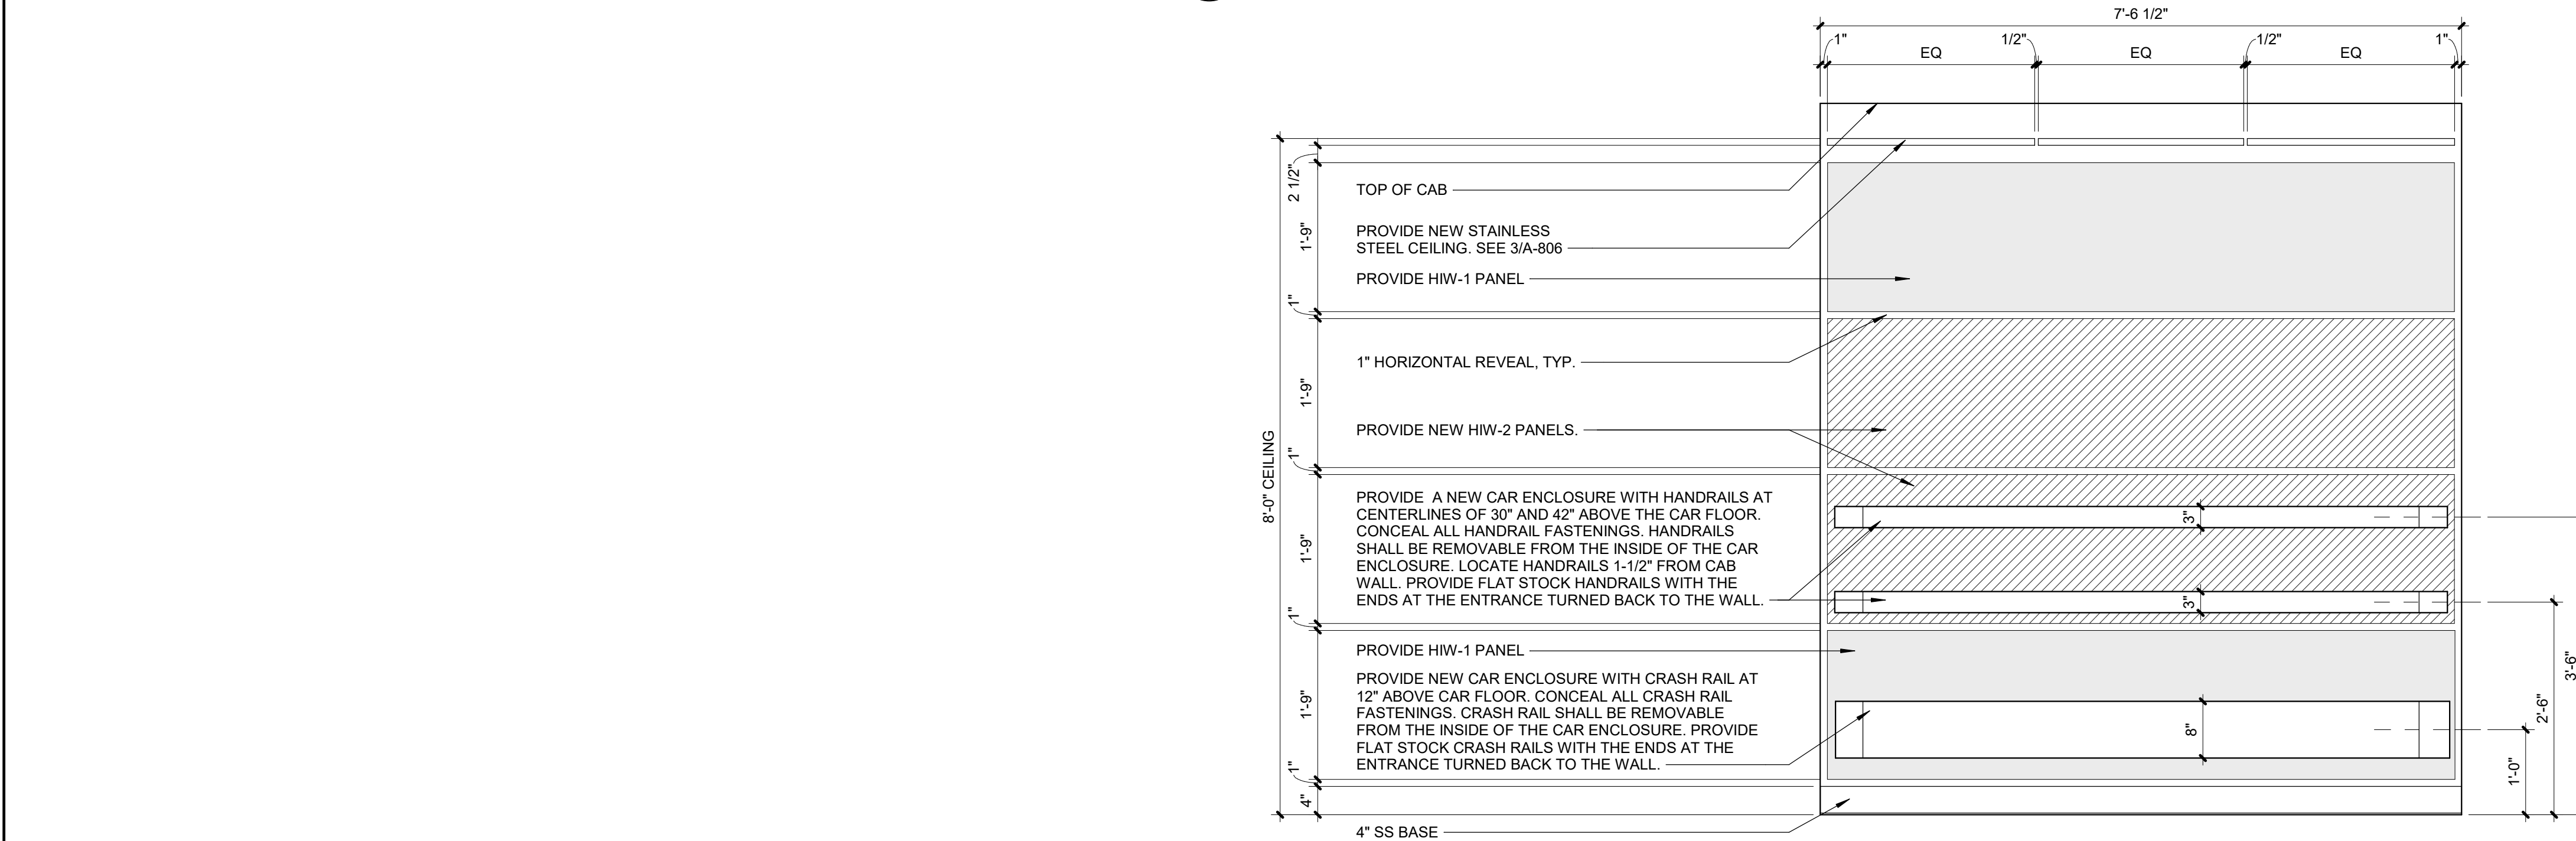

4 ELEVATOR CAB REAR ELEVATION (P17 - P19)
Scale: 3/4" = 1'-0"

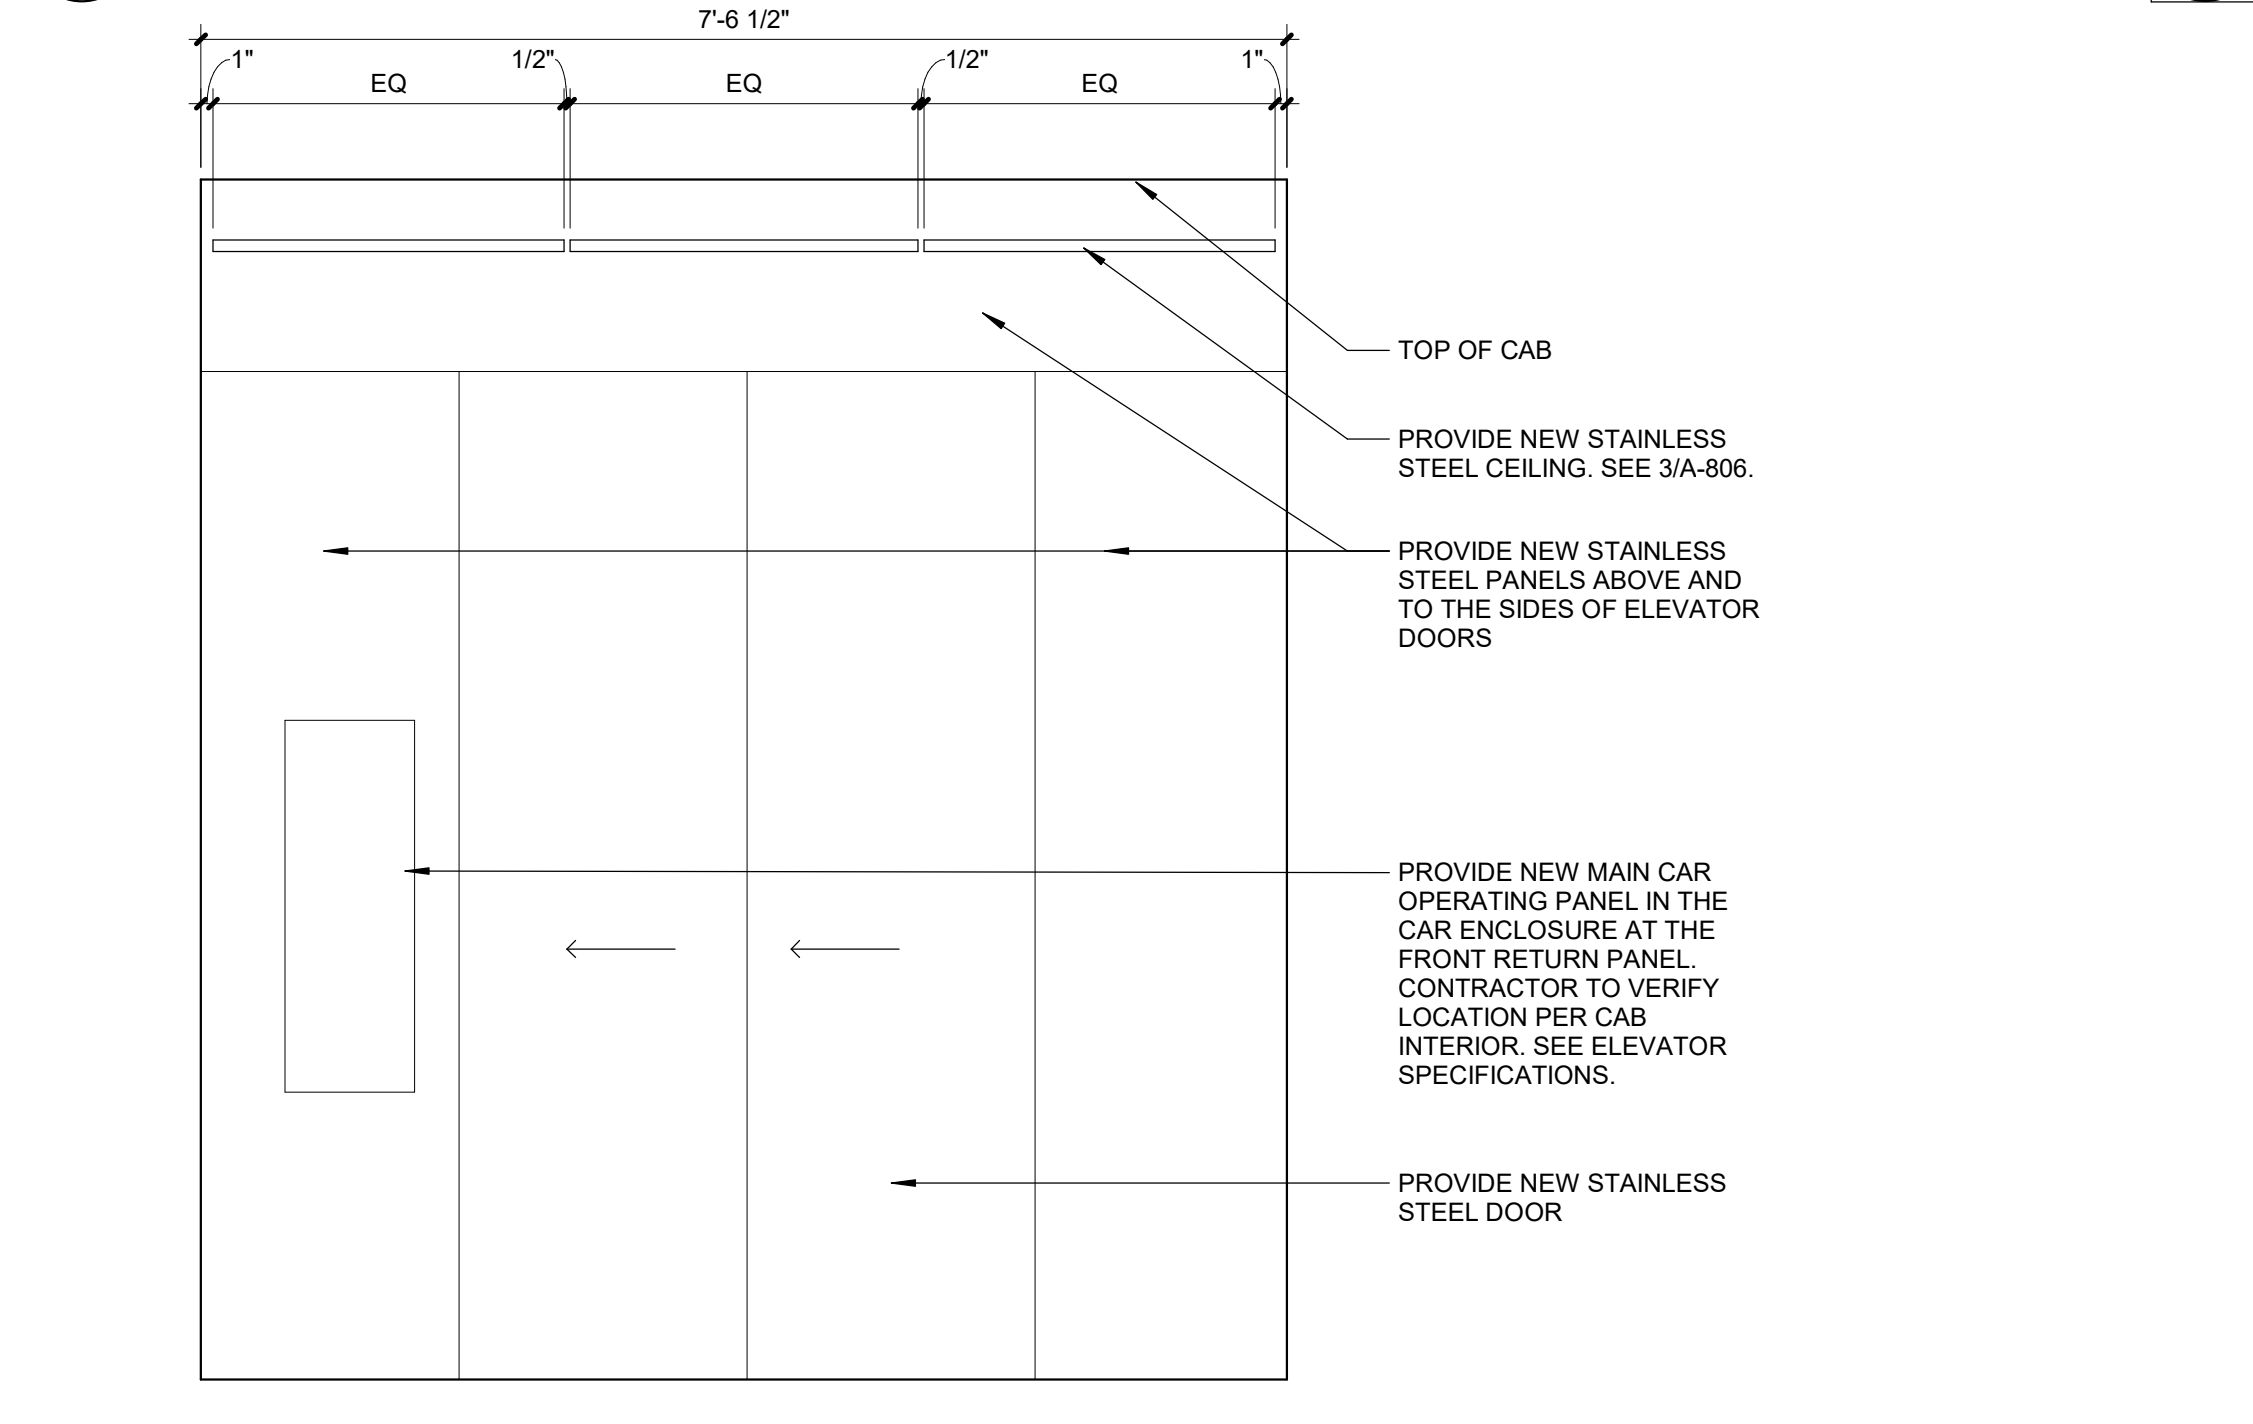

2 ELEVATOR CAB FRONT ELEVATION (P17 - P19)
Scale: 3/4" = 1'-0"

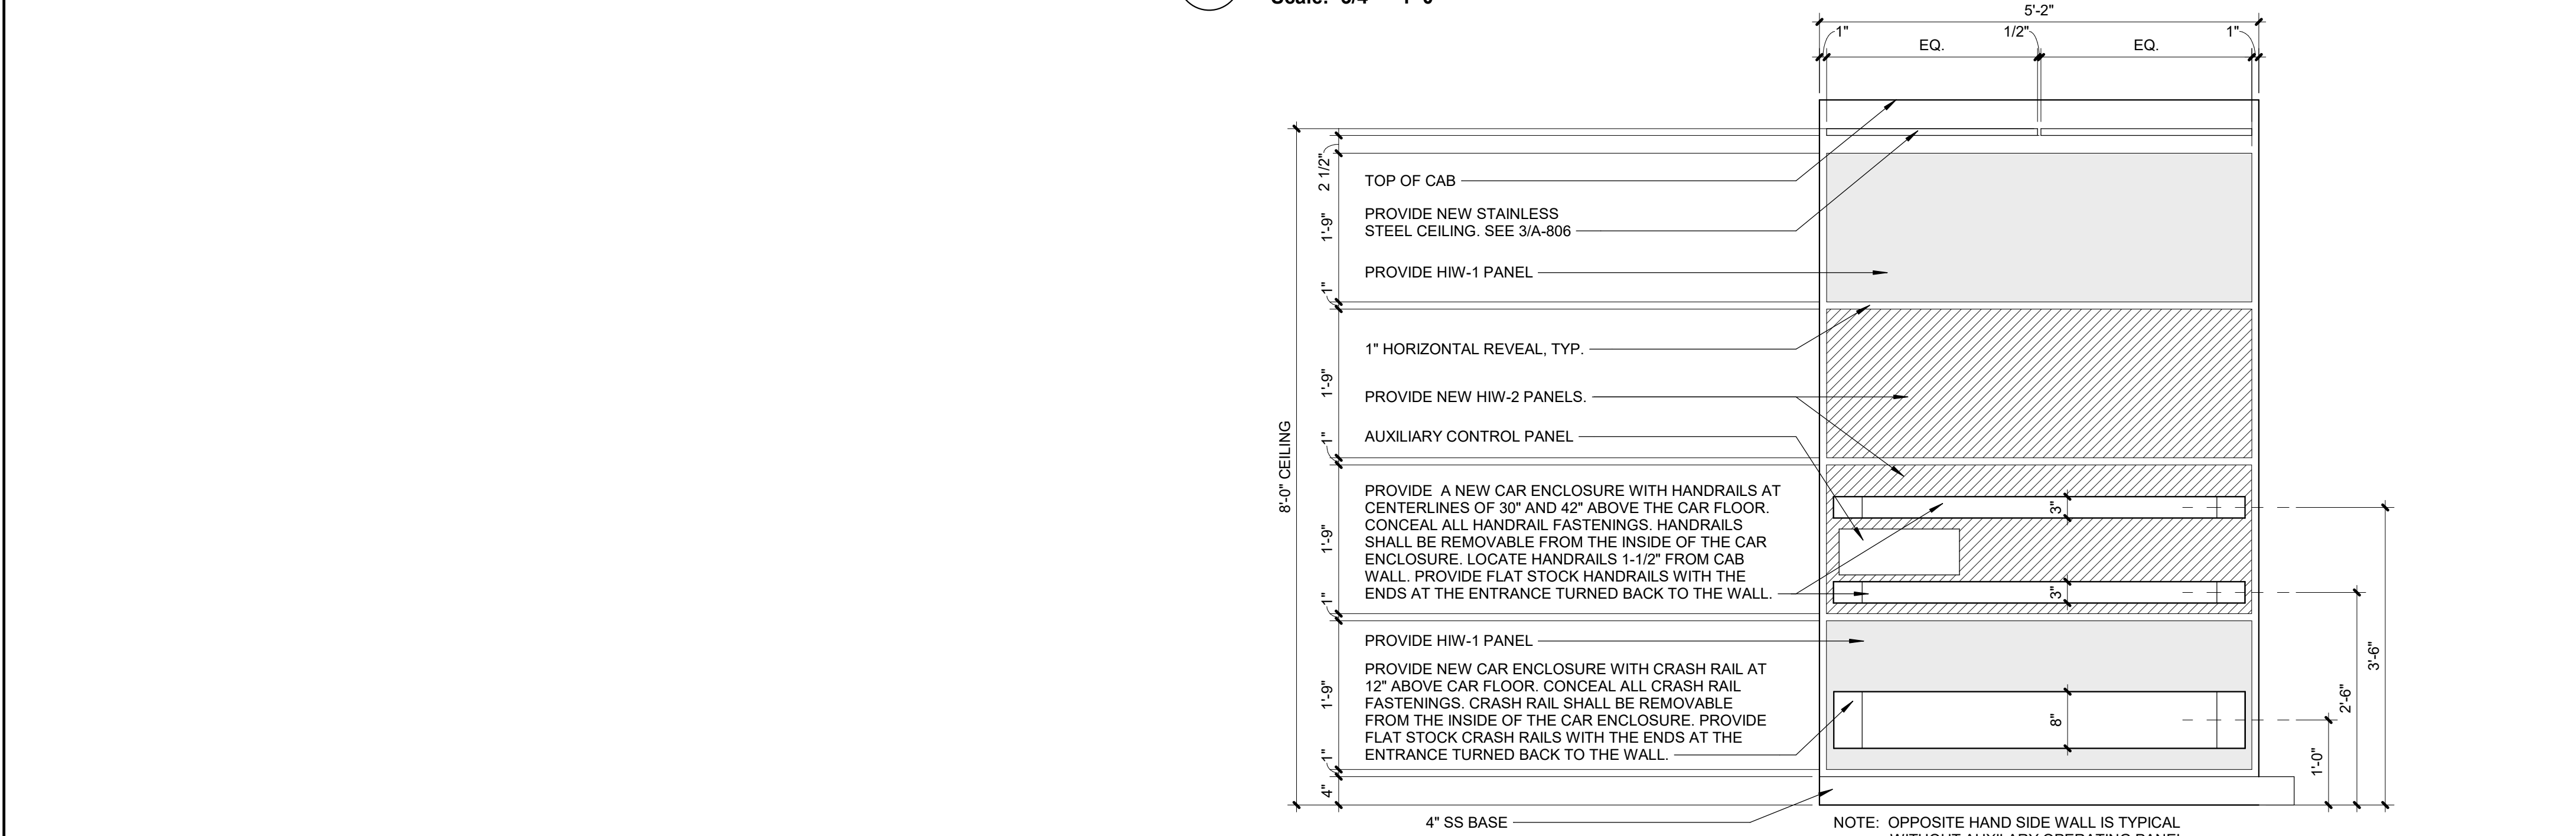

5 ELEVATOR CAB SIDE ELEVATION (P17 - P19)
Scale: 3/4" = 1'-0"

SHEET NOTES:

- A. ALL ELECTRICAL WORK REQUIRED BY THIS MODIFICATION IS THE RESPONSIBILITY OF THE ELEVATOR CONTRACTOR. IF ANY WORK REQUIRES A LICENSED ELECTRICIAN, THIS SHALL BE INCLUDED IN THE RESPONSIBILITY OF THE ELEVATOR COMPANY TO RETAIN AND PROVIDE SUCH AN INDIVIDUAL IF NECESSARY.
- B. SEE ELEVATOR SCHEDULE ON A-001 FOR ADDITIONAL INFORMATION.

KEY NOTES:

1. PROVIDE NEW CAR ENCLOSURE WITH NEW FLOORING, LVT-1.

**FULLY SPRINKLERED
100% BID DOCUMENTS**

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

VA U.S. Department
of Veterans Affairs

PLUMBING SYMBOLS & ABBREVIATIONS			
ANNOTATION ABBREVIATIONS			
A/E	ARCHITECT/ENGINEER	F	FAHRENHEIT
AC	ABOVE CEILING	FA	FROM ABOVE
AD	AREA DRAIN	FB	FROM BELOW
AFF	ABOVE FINISHED FLOOR	FBO	FURNISHED BY OTHERS
AG	AIR GAP	FCO	FLOOR CLEANOUT
AP	ACCESS PANEL	FCW	FILTERED COLD WATER
AS	AUTOMATIC SPRINKLER	FD	FLOOR DRAIN
AFG	ABOVE FINISHED GRADE	FDC	FIRE DEPARTMENT (HOSE) CONNECTION
ASD	ADJUSTABLE SPEED DRIVE	FM	FUEL OIL PUMP
ASHRAE	AMERICAN SOCIETY HEATING, REFRIGERATING, AIR CONDITIONING ENGINEERS	FOP	FUEL OIL RETURN
ASME	AMERICAN SOCIETY OF MECHANICAL ENGINEERS	FOS	FUEL OIL SUPPLY
ASPE	AMERICAN SOCIETY PLUMBING ENGINEERS	FOV	FUEL OIL VENT
ASR	AUTOMATIC SPRINKLER RISER	FS	FLOOR SINK
AV	ACID VENT	FU	FIXTURE UNITS
AW	ACID WASTE	G	GALLON
BAS	BUILDING AUTOMATION SYSTEM	GC	GENERAL CONTRACTOR
BF	BELOW FLOOR	GCO	GRADE CLEANOUTS
BFP	BACKFLOW PREVENTER	GD	GARBAGE DISPOSAL
BG	BELOW GRADE	GPD	GALLONS PER DAY
BH	BOOSTER HEATER	GPH	GALLONS PER HOUR
BHP	BREAK HORSEPOWER	GPM	GALLONS PER MINUTE
BJ	BETWEEN JOISTS	GPR	GAS PRESSURE REGULATOR
BOF	BOTTOM OF PIPE	GRS	GAS REGULATOR STATION
BSP	BLACK STEEL PIPE	GT	GREASE TRAP
BT	BATHTUB	GVTR	GAS VENT THROUGH ROOF
BTUH	BRITISH THERMAL UNITS PER HOUR	GW	GAS FIRED WATER HEATER
C	CELSIUS	H&CW	HOT AND COLD WATER
CF	COMBINATION FIXTURE	HE	HOSE BIBB (INTERIOR)
CGA	COMPRESSED GAS ASSOCIATION	HD	HUB DRAIN
CI	CAST IRON	HEX	HEAT EXCHANGER
CO	CLEANOUT	HP	HORSEPOWER
COND	CONDENSATE	HS	HAND SINK
COND	CONDENSATE PUMP	HST	HOT WATER STORAGE TANK (DOMESTIC)
CS	CLINICAL SINK	HWB	HOT WATER BOILER
CV	CONTROL VALVE	HWCP	HOT WATER CIRCULATING PUMP
DA	DENTAL COMPRESSED AIR	HWP	HOT WATER PUMP
DCW	DOMESTIC COLD WATER	HYD	HYDRANT
DHW	DOMESTIC HOT WATER	ICW	INDUSTRIAL COLD WATER
DHWR	DOMESTIC HOT WATER RETURN	INV	INVERT
DHWS	DOMESTIC HOT WATER SUPPLY	IPC	INTERNATIONAL PLUMBING CODE
DI	DEIONIZED WATER	IRW	IRRIGATION WATER
DN	DOWN	IW	INDIRECT WASTE
DDE	DEPARTMENT OF ENERGY	IWH	INSTANTANEOUS WATER HEATER
DS	DOWNSPOUT	IWR	INDUSTRIAL WATER RETURN
DV	DENTAL VACUUM	IWS	INDUSTRIAL WATER SUPPLY
DW	DISHWASHER	KW	KILOWATT
DWG	DRAWING	KWHR	KILOWATT-HOUR
DWH	DOMESTIC WATER HEATER	L/S	LITER PER SECOND
DWR	DRINKING WATER RETURN	LA	LABORATORY AIR
DWS	DRINKING WATER SUPPLY	LAV	LAVATORY
DWV	DRAIN WASTE VENT	LBS/HR	POUNDS PER HOUR
EC	ELECTRICAL CONTRACTOR	LCW	LABORATORY COLD WATER
EL	ELEVATION	LHW	LABORATORY HOT WATER
EMCS	ENERGY MONOSERRAT AND CENTRAL SYSTEM	LNG	LIQUID NATURAL GAS
EPA	ENVIRONMENTAL PROTECTION AGENCY	LOX	LIQUID OXYGEN
EPACT	ENERGY POLICY ACT	LV	LABORATORY VACUUM
ESC	ESCUTCHEON	M	METER
ESH	EMERGENCY SHOWER	MA	MEDICAL AIR
ET	EXPANSION TANK	MAV	MANUAL AIR VENT
EWC	ELECTRIC WATER COOLER	MBH	THOUSANDS OF BTU PER HOUR
EW	ELECTRIC WATER HEATER	MC	MECHANICAL CONTRACTOR
EWS	EYEWASH STATION	MED	MEDICAL
EX	EXISTING	MER	MECHANICAL EQUIPMENT ROOM
		MH	MANHOLE
		MOU	MEMORANDUM OF UNDERSTANDING
		MSB	MOP SINK BASIN
		MV	MEDICAL VACUUM
		N2	NITROGEN
		NZO	NITROUS OXIDE
		NC	NORMALLY CLOSED
		NG	NATURAL GAS
		NIC	NOT IN CONTRACT
		NO	NORMALLY OPEN
		NOM	NOMINAL
		NPW	NON POTABLE WATER
		NTS	NOT TO SCALE


PLUMBING SYMBOLS	
	PIPE SLOPE ARROW
	FLOW ARROW
	CONCENTRIC REDUCER
	ECCENTRIC REDUCER
	3-WAY CONTROL VALVE
	ANGLE GATE VALVE
	ANGLE GLOBE VALVE
	BALL VALVE
	BUTTERFLY VALVE
	CHECK VALVE
	CIRCUIT SETTER
	CONTROL VALVE
	GATE VALVE
	GLOBE VALVE
	PLUG VALVE
	PRESSURE REDUCING VALVE (WATER)
	PRESSURE REGULATOR (GAS)
	SAFETY RELIEF VALVE
	TWO POSITION CONTROL VALVE
	BACKFLOW PREVENTER
	HOSE BIBB / SILLCOCK
	AUTOMATIC AIR VENT
	PRESSURE GAUGE
	THERMOMETER
	FLOW SWITCH
	PRESSURE SWITCH
	TEMPERATURE SWITCH
	PIPE UNION
	WYE STRAINER
	WYE STRAINER W/DRAIN VALVE
	PUMP
	FLOOR DRAIN - ROUND OR SQUARE
	FLOOR CLEANOUT
	SUSPENDED CLEANOUT
	WCO WALL CLEANOUT
	PIPE CAP
	PIPE TURNING DOWN
	PIPE TURNING UP
	TEE UP
	TEE DOWN
	DROP AND RUN
	DROP AND TURN
	TEE OFF TOP
	TEE OFF BOTTOM
	CROSS AND RISER
	PLAN 90° ELBOW
	PIPE TEE
	FLEXIBLE PIPE CONNECTOR
	PIPE ANCHOR
	PIPE GUIDES
	WATER METER

PLUMBING SYMBOLS	
PIPING SYSTEM	
	AW ACID WASTE
	CA COMPRESSED AIR
	CD CONDENSATE DRAIN
	CO2 CARBON DIOXIDE
	NG NATURAL GAS
	GW GREASE WASTE
	MA MEDICAL AIR
	N2 NITROGEN
	N2O NITROUS OXIDE
	ODF OVERFLOW STORM DRAIN
	OW OIL WASTE
	OX OXYGEN
	PD PUMP DISCHARGE
	PG PROPANE GAS
	ST STORM
	VAC VACUUM
	WAGD WASTE ANESTHETIC GAS DISPOSAL
	SAN SANITARY WASTE
	AV ACID VENT
	OV OIL VENT
	V SANITARY VENT
	DCW DOMESTIC COLD WATER
	DI DE-IONIZED WATER
	NPCW NONPOTABLE COLD WATER
	RO REVERSE OSMOSIS WATER
	SCW SOFTENED COLD WATER
	DHW DOMESTIC HOT WATER
	DHW 140 DOMESTIC HOT WATER (OTHER TEMP)
	DCWR DOMESTIC CW RECIRCULATION
	DHW R DOMESTIC HW RECIRCULATION

ANNOTATION SYMBOLS	
	NEW WORK KEYNOTE
#	DEMOLITION KEYNOTE
NEW	BOLD TEXT INDICATES NEW ITEM
EXISTING	ITALICIZED TEXT INDICATES EXISTING ITEM
	DETAIL MODULE NUMBER
	DETAIL OR SECTION MARK - SHOWN ON DRAWING
	CONNECT TO EXISTING
	LIMIT OF DEMOLITION
P-###	NEW PLUMBING EQUIPMENT MARK
EX-###	EXISTING PLUMBING EQUIPMENT MARK

PLUMBING DEMOLITION GENERAL NOTES	
1. VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING WORK. NOTIFY COR REGARDING CONFLICTS BEFORE PROCEEDING WITH WORK.	
2. REMOVED ITEMS REMAIN PROPERTY OF GOVERNMENT UNTIL COR DETERMINES THAT THEY ARE NOT REQUIRED. REMOVE FROM SITE ITEMS NOT BEING RETAINED BY GOVERNMENT OR REINSTALLED AS PART OF THIS WORK.	
3. DO NOT DISTURB ITEMS NOT INDICATED FOR DEMOLITION.	
4. VERIFY SIZE AND LOCATION OF EXISTING UTILITIES PRIOR TO START OF DEMOLITION. RELOCATE, REMOVE AND ADJUST MECHANICAL AND ELECTRICAL ITEMS AS NECESSARY TO COORDINATE WITH NEW WORK.	
5. AFTER DEMOLITION IS COMPLETE, PATCH AND REPAIR FINISHES TO MATCH EXISTING ADJACENT CONDITIONS.	
6. COORDINATE DEMOLITION WITH COR. SUBMIT SHUTDOWN PLAN AND SCHEDULE TO COR FOR REVIEW AND APPROVAL.	
7. PROTECT EXISTING UTILITIES TO REMAIN FROM DAMAGE DURING DEMOLITION. REPAIR UTILITIES AND SERVICES DAMAGED AT NO ADDITIONAL COST.	
8. TEMPORARILY MOVE OR TAKE EQUIPMENT OUT OF SERVICE AS NECESSARY TO COMPLETE WORK.	
9. SAWCUT CONCRETE FLOOR AS REQUIRED FOR DEMOLITION WORK INDICATED. COORDINATE WITH NEW PLUMBING WORK AND WORK OF OTHER TRADES.	

PLUMBING GENERAL NOTES	
1. WORK SHALL CONFORM TO APPLICABLE LOCAL, STATE, AND NATIONAL CODES AND APPLICABLE VA STANDARDS.	
2. INSTALL EQUIPMENT IN ACCORDANCE WITH MANUFACTURER'S WRITTEN RECOMMENDATIONS.	
3. OBTAIN AND PAY FOR PERMITS, FEES, AND INSPECTIONS REQUIRED FOR THIS WORK.	
4. PROVIDE NEW MATERIALS, EQUIPMENT AND PRODUCTS INCORPORATED IN THE WORK, OF A SUITABLE GRADE FOR THE PURPOSES INTENDED.	
5. EQUIPMENT OR MATERIAL DEVIATIONS FROM INDICATED CONTRACT REQUIREMENTS ARE SUBJECT TO THE APPROVAL OF THE COR. SUBMIT PROPOSED EQUIPMENT DEVIATIONS THAT ARE SIMILAR BOTH IN QUALITY AND CAPACITY TO THAT EQUIPMENT SPECIFIED, AS SOLELY DETERMINED BY THE COR.	
6. INSTALL EQUIPMENT AS INDICATED, ALLOWING FOR SUFFICIENT ACCESS AND CLEARANCE SPACE FOR EQUIPMENT MAINTENANCE, REPAIRS, AND REPLACEMENT.	
7. AT EACH PLUMBING FIXTURE, PROVIDE A PISTON TYPE WATER HAMMER ARRESTOR SIZED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.	
8. SANITARY DRAINAGE PIPING INDICATED IS LOCATED BELOW FLOOR SLAB OR WITHIN WALLS UNLESS NOTED OTHERWISE. SANITARY VENT PIPING INDICATED IS ABOVE THE CEILING OR WITHIN WALLS UNLESS NOTED OTHERWISE.	
9. SUPPORT PIPING SYSTEM AS REQUIRED BY APPLICABLE LOCAL, STATE, AND NATIONAL CODES ALONG WITH SPECIFICATIONS, VA STANDARDS AND MANUFACTURER'S RECOMMENDATIONS.	
10. FIRESTOP AND SEAL PIPING PENETRATIONS THROUGH WALLS AND FLOORS EQUAL TO THE RATING OF WALLS AND FLOORS.	
11. TEST PLUMBING SYSTEM IN ACCORDANCE WITH APPLICABLE LOCAL, STATE AND NATIONAL CODES AND APPLICABLE VA STANDARDS.	
12. COORDINATE PLUMBING PIPING WITH WORK OF OTHER DISCIPLINES.	
13. DISINFECT DOMESTIC WATER SYSTEM IN ACCORDANCE WITH APPLICABLE LOCAL, STATE, AND NATIONAL CODES AND APPLICABLE VA STANDARDS.	
14. PROVIDE SHUT OFF VALVES AT BRANCH PIPING TO FIXTURES.	
15. COORDINATE PLUMBING WORK WITH ALL OTHER TRADES PRIOR TO INSTALLATION. COORDINATE ROUTING OF PIPING WITH EXISTING CONDITIONS.	
16. PROVIDE ALL NECESSARY OFFSETS, TEES, ELBOWS, ETC. FOR A COMPLETE AND COORDINATED WORKING PLUMBING SYSTEM. DRAWING PLANS, SCHEMATICS, AND DIAGRAMS INDICATE GENERAL LOCATION AND ARRANGEMENT OF PIPING SYSTEMS.	
17. CONTRACTOR SHALL COORDINATE ANY PLUMBING SYSTEM REQUIRED SHUTDOWN WITH THE COR 2 WEEK IN ADVANCE AND CONFIRM 48 HOURS PRIOR.	
18. PATCH, PAINT AND CLEAN SURFACES SUSTAINING DAMAGE ASSOCIATED WITH PLUMBING WORK OF THIS CONTRACT, UNLESS NOTED OTHERWISE.	
19. INSTALL ESCUTCHEONS IN ALL PLACES WHERE PIPING PENETRATES A WALL IN AN EXPOSED LOCATION.	
20. DO NOT INSTALL PIPES ABOVE TELECOM OR ELECTRICAL EQUIPMENT.	

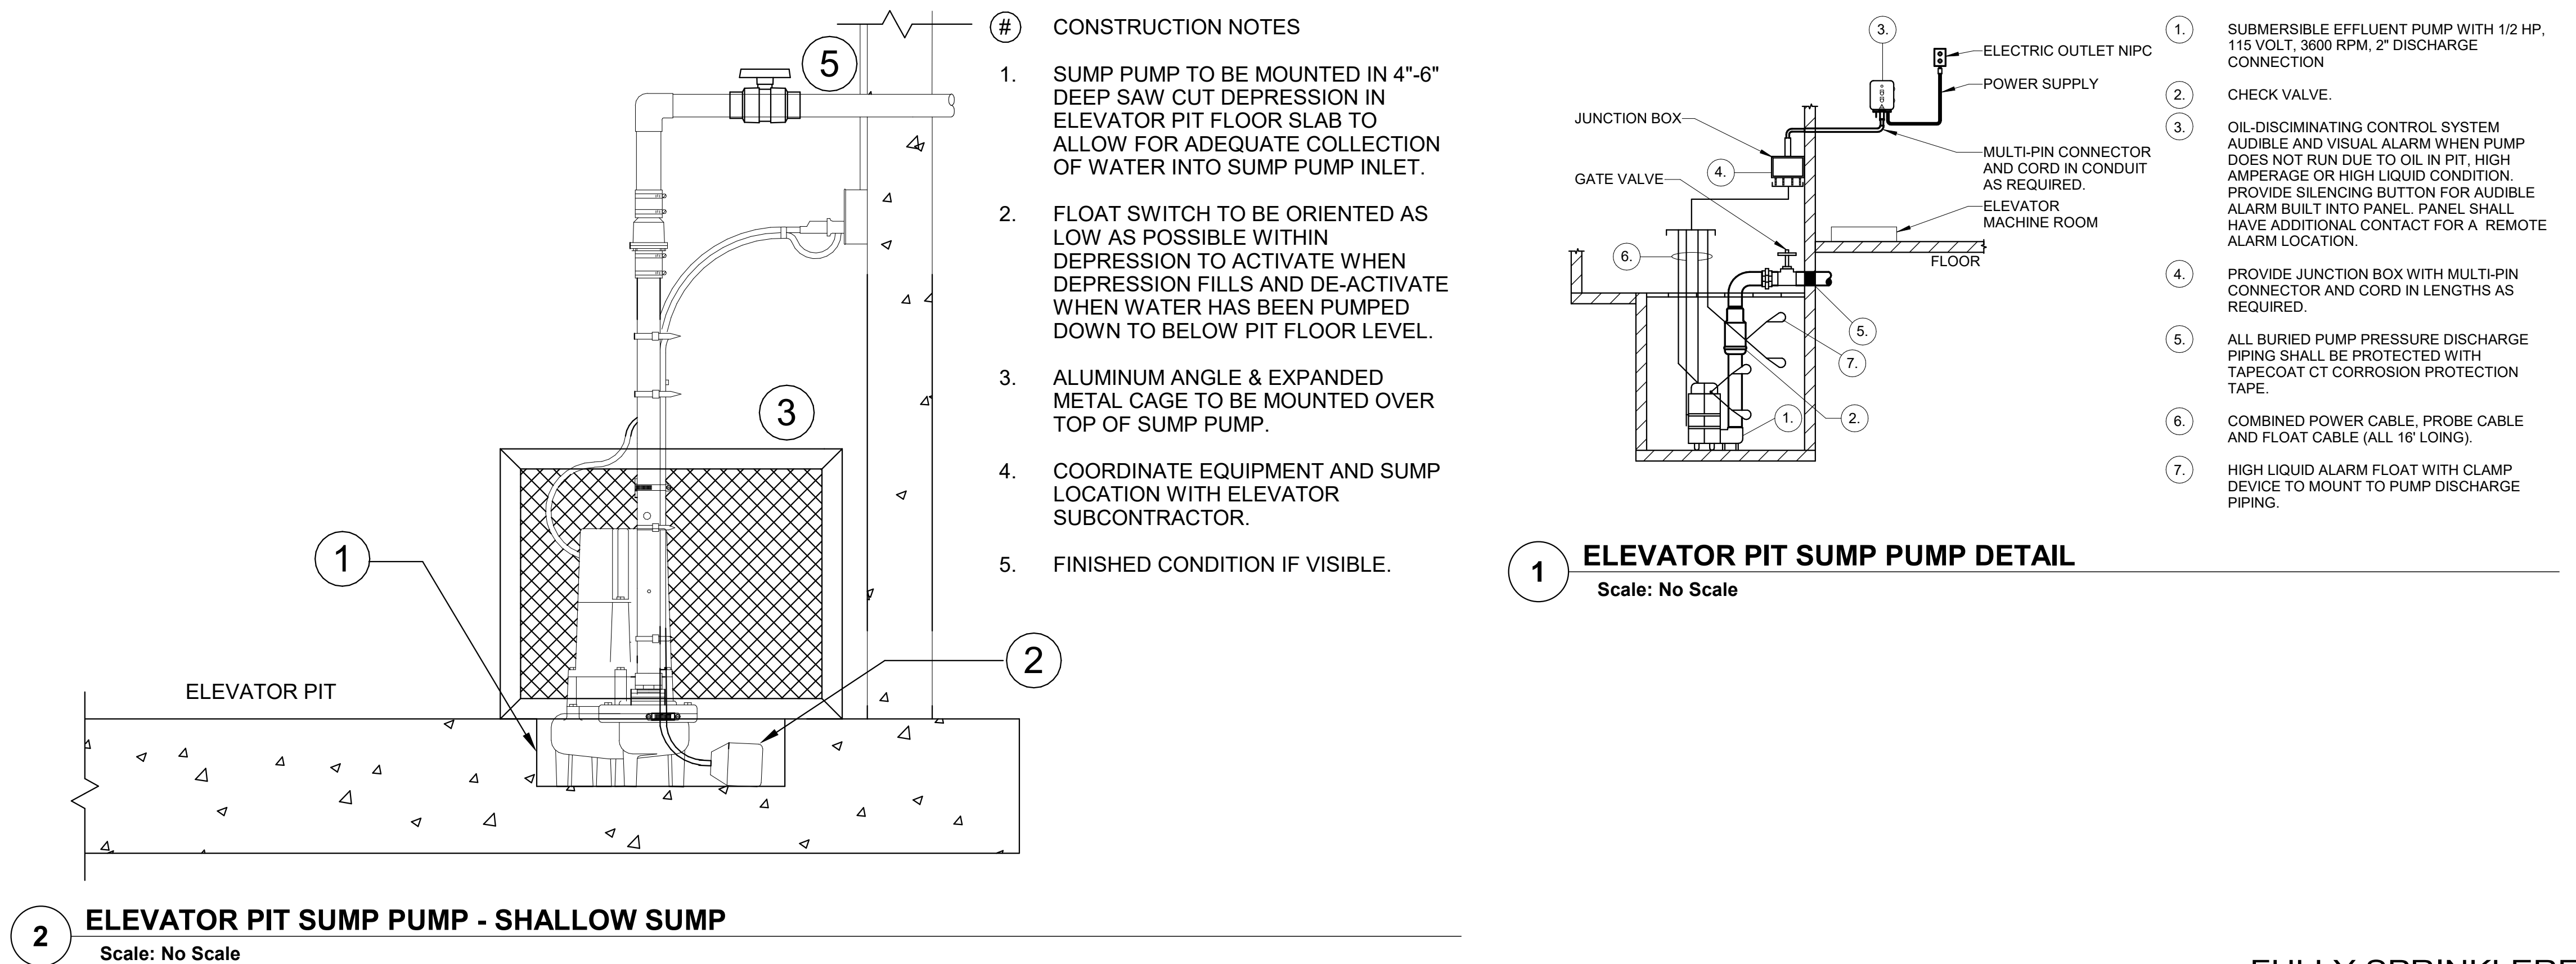

CONSULTANTS:				PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title PLUMBING GENERAL INFORMATION AND DETAILS		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
				 Engineers Architects www.acg-pa.com		U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC, VISN 7		Approved		Drawing Number M-002	
Revisions:				ACG Project Number 21-344		Date FEBRUARY 6, 2025		Checked SWR		Drawn AV		Dwg 2 of 10	
Date						Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		Date FEBRUARY 6, 2025		Checked SWR		Drawn AV	

SHEET NOTES:

1. REMOVE AND REPLACE ANY FIRE PROTECTION HEADS AFFECTED BY WORK.

#


KEY NOTES:

1. DEMOLISH CONDENSING UNIT ON ROOF.
2. DEMOLISH INDOOR HEAT PUMP UNIT.


#

KEY NOTES:


1. PROVIDE OUTDOOR SPLIT SYSTEM. USE EXISTING ROOF SUPPORTS.
2. PROVIDE INDOOR SPLIT SYSTEM.
3. PROVIDE THERMOSTAT SERVING NEW SPLIT SYSTEM AND NEW DDC THERMOSTAT. MOUNT APPROX 48" AFF.
4. PROVIDE SUMP PUMP. ROUTE DISCHARGE TO EXTERIOR WITH SPLASH BLOCK AT DRAIN LOCATION.
5. PROVIDE 24" X 24" BY 6" DEEP SHALLOW SUMP PIT.

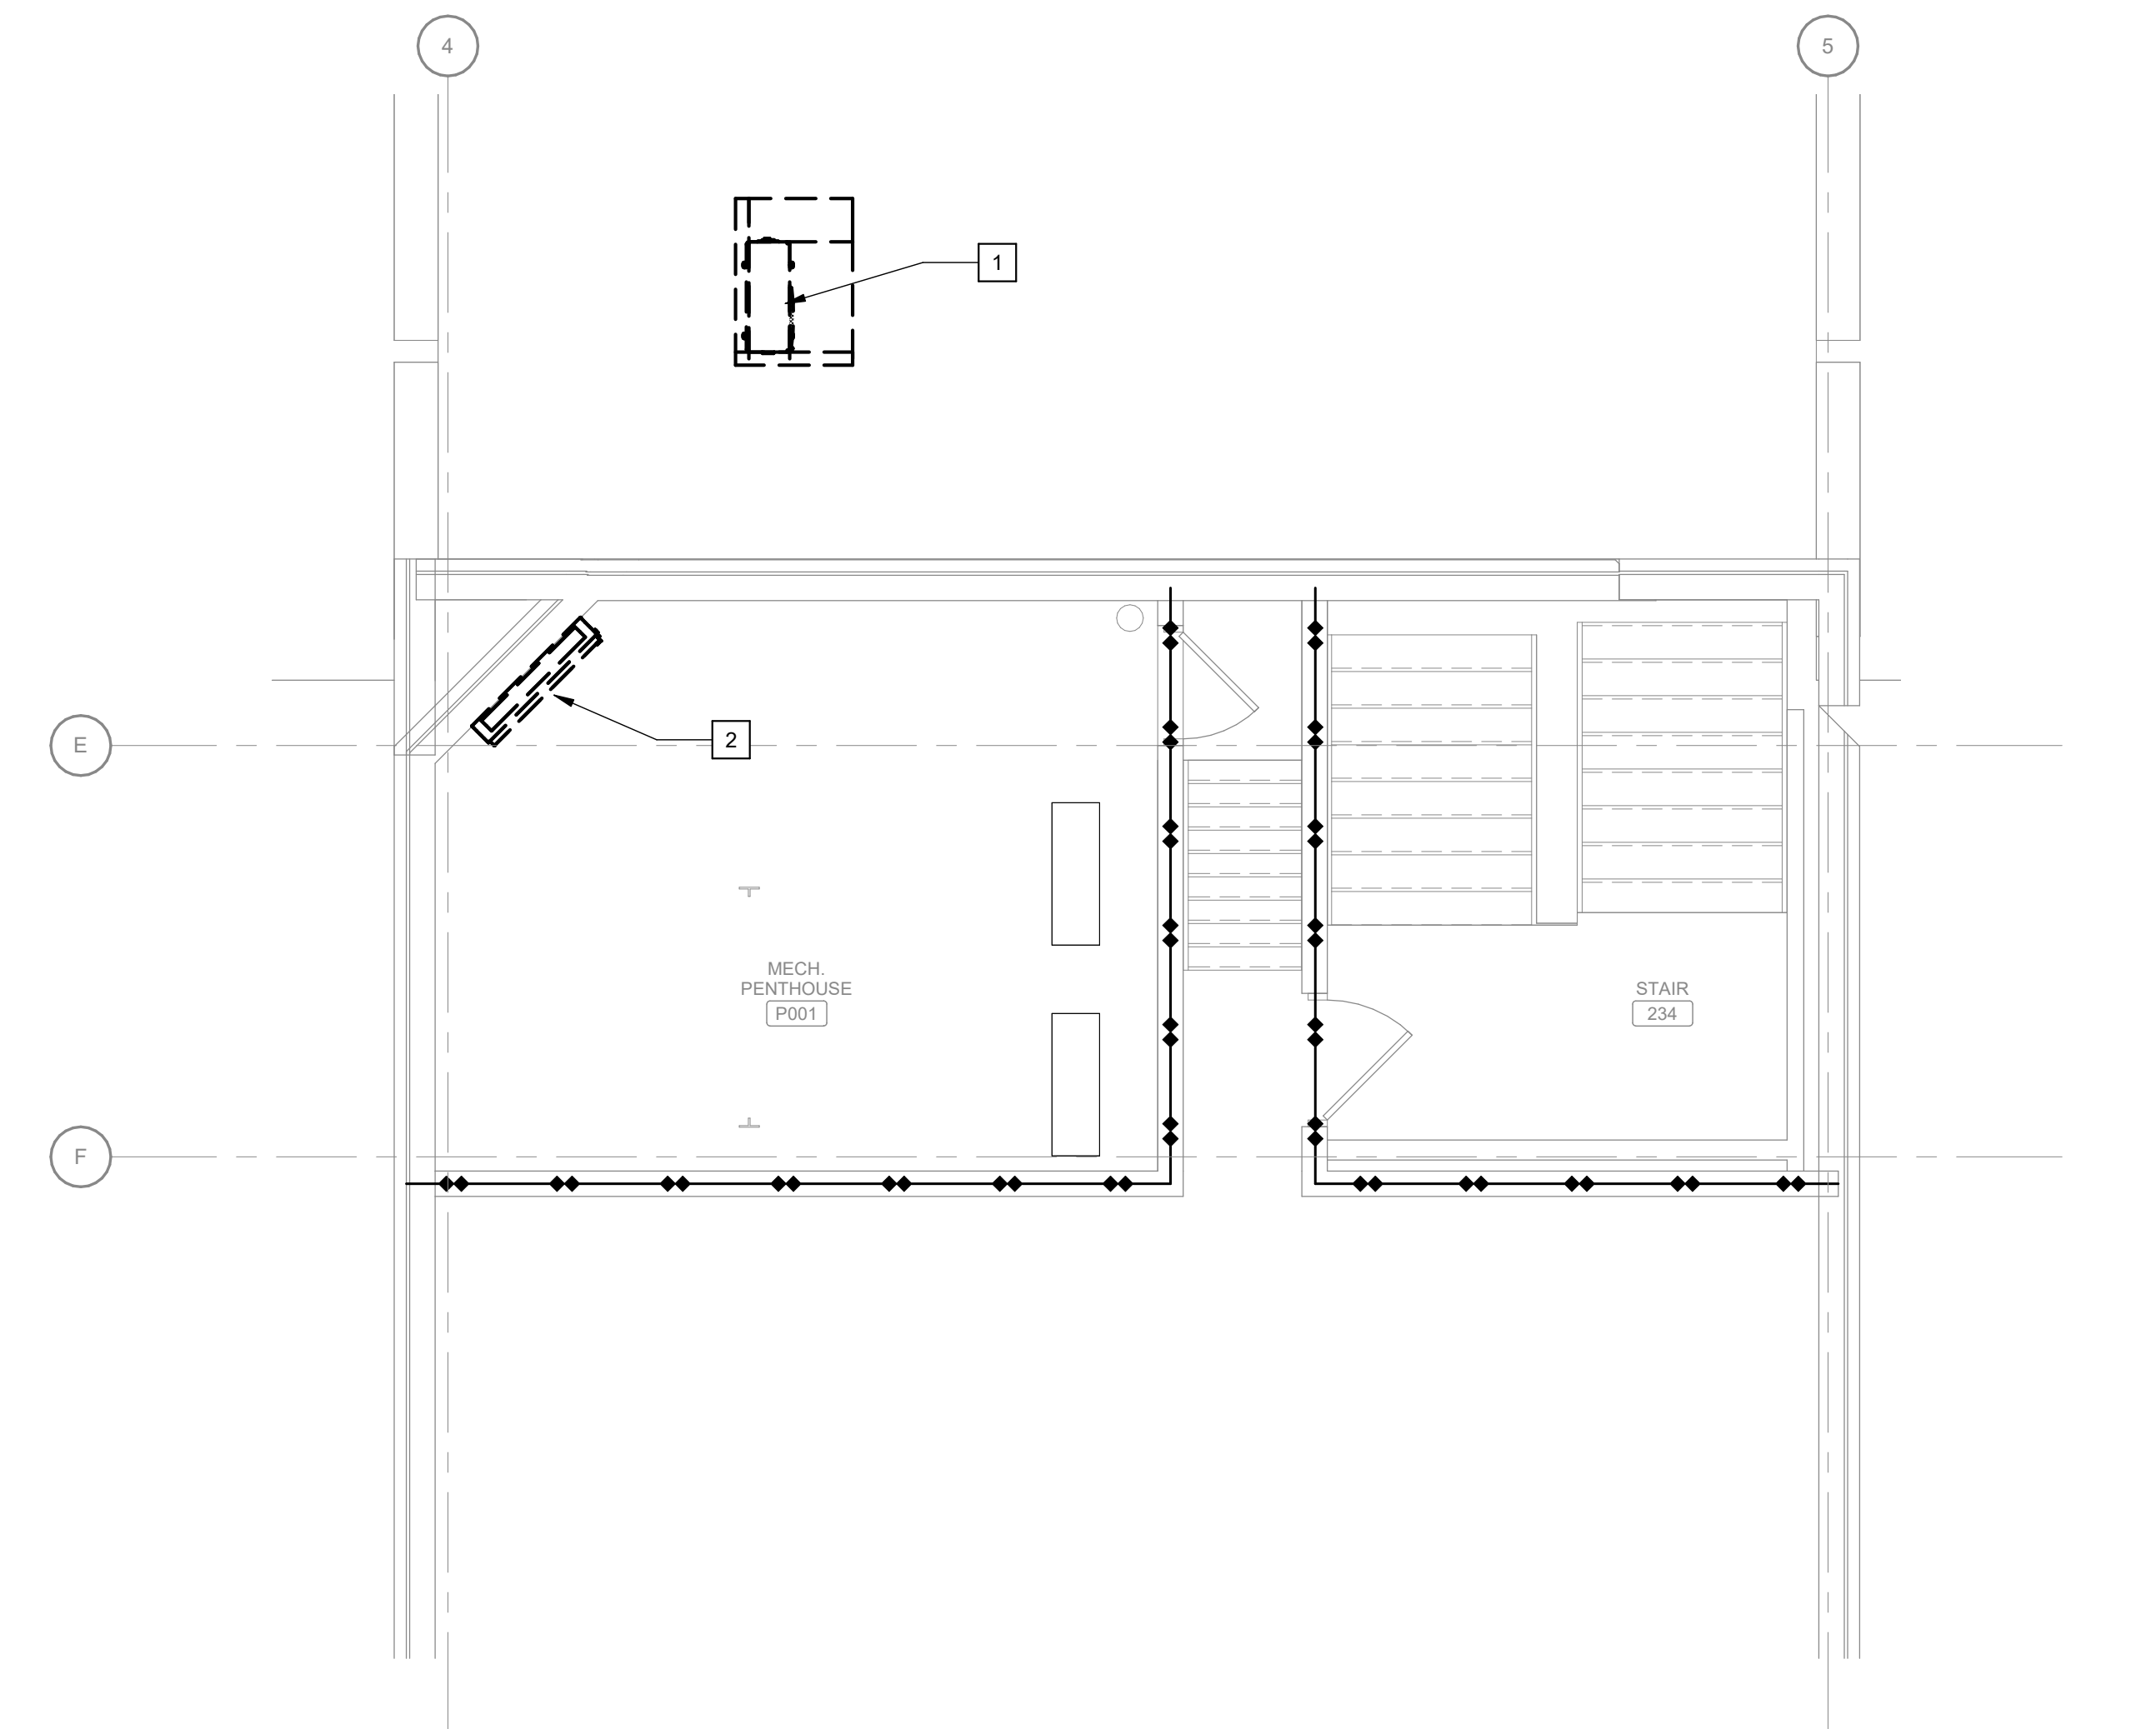

1 BUILDING 1 PARTIAL PENTHOUSE MECHANICAL DEMOLITION PLAN - P1 & P2
Scale: 1/4" = 1'-0"

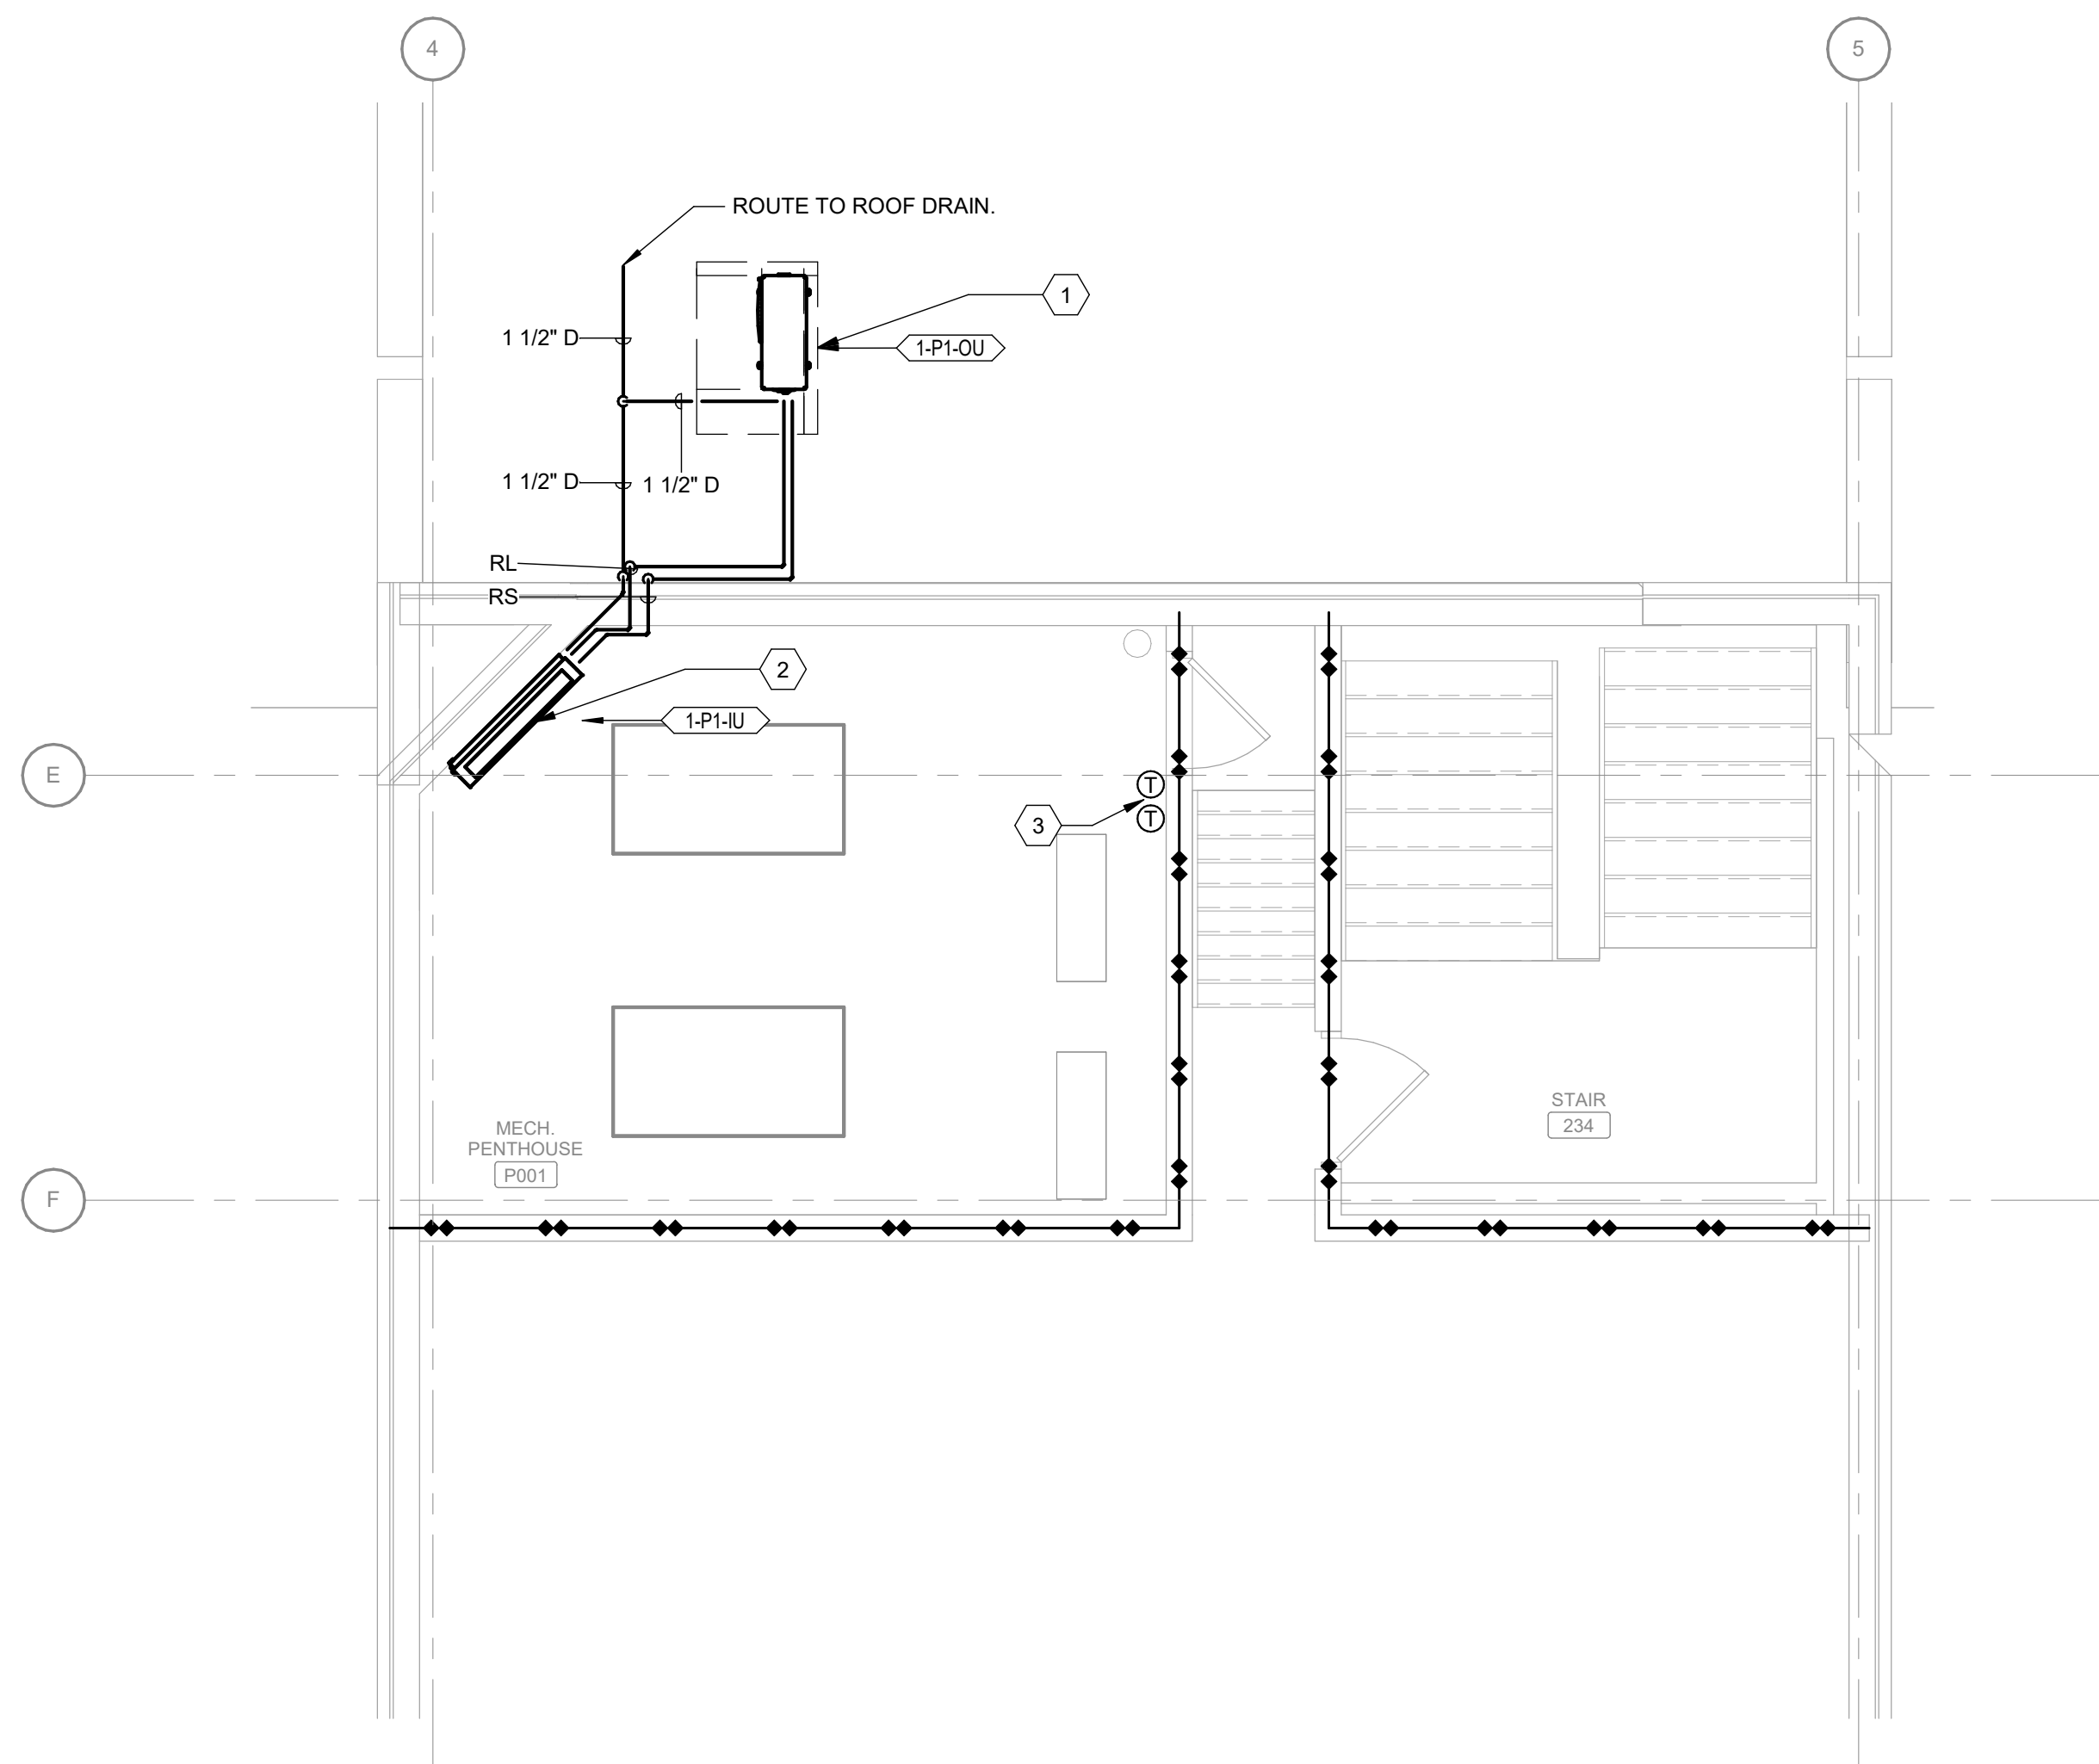


3 BUILDING 1 PARTIAL PENTHOUSE MECHANICAL PLAN - P1 & P2
Scale: 1/4" = 1'-0"

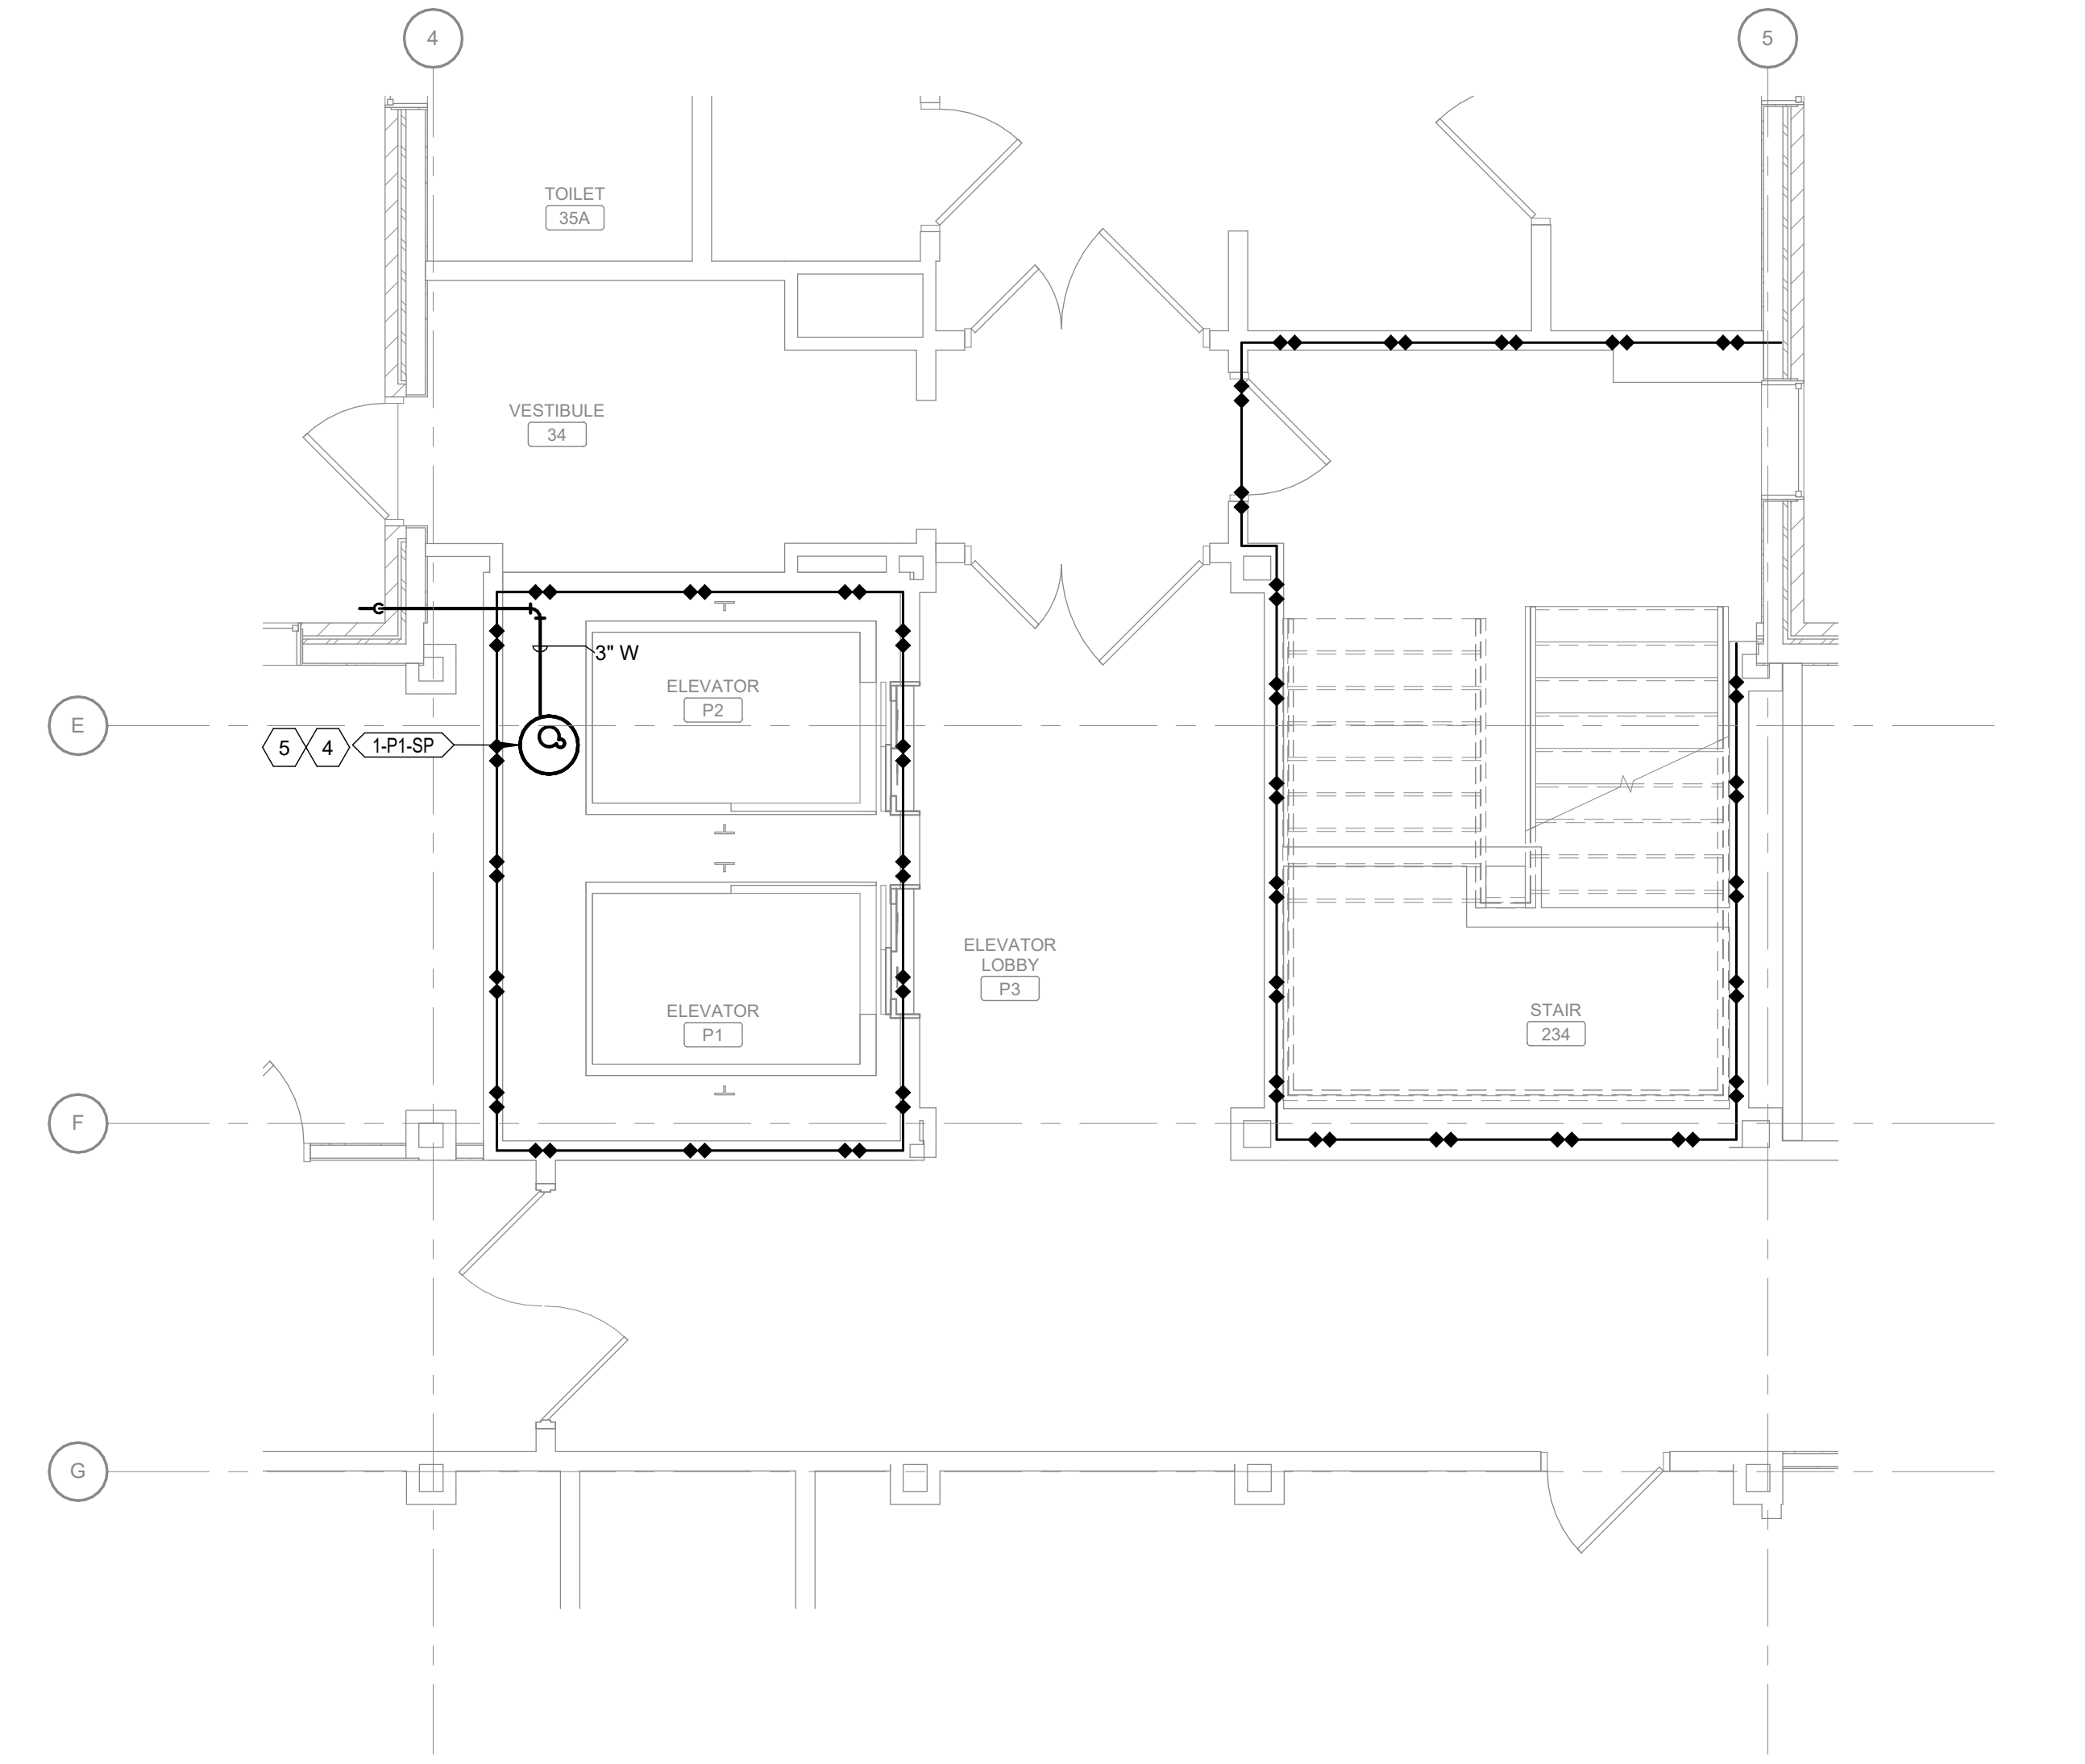


2 BUILDING 1 PARTIAL BASEMENT MECHANICAL PLAN - P1 & P2
Scale: 1/4" = 1'-0"

KEY PLAN

SCALE: NO SCALE

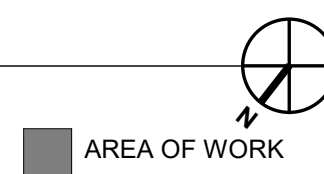

AREA OF WORK

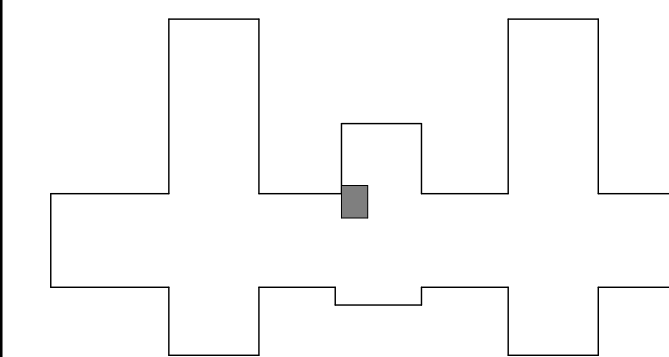

WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

CONSULTANTS:



PROJECT MANAGER

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

ACG Project Number
21-344

Office of
Construction
and Facilities
Management



Drawing Title
**BUILDING 1 PARTIAL MECHANICAL
FLOOR PLANS - P1 & P2**

Location
TUSCALOOSA VAMC, VISN 7

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**


Approved
Date
FEBRUARY 6, 2025

Checked
SWR


Drawn
AV

VA PROJECT NUMBER
679-22-100
Building Number
1
Drawing Number
1.M-101
Dwg 3 of 10

Revisions: Date

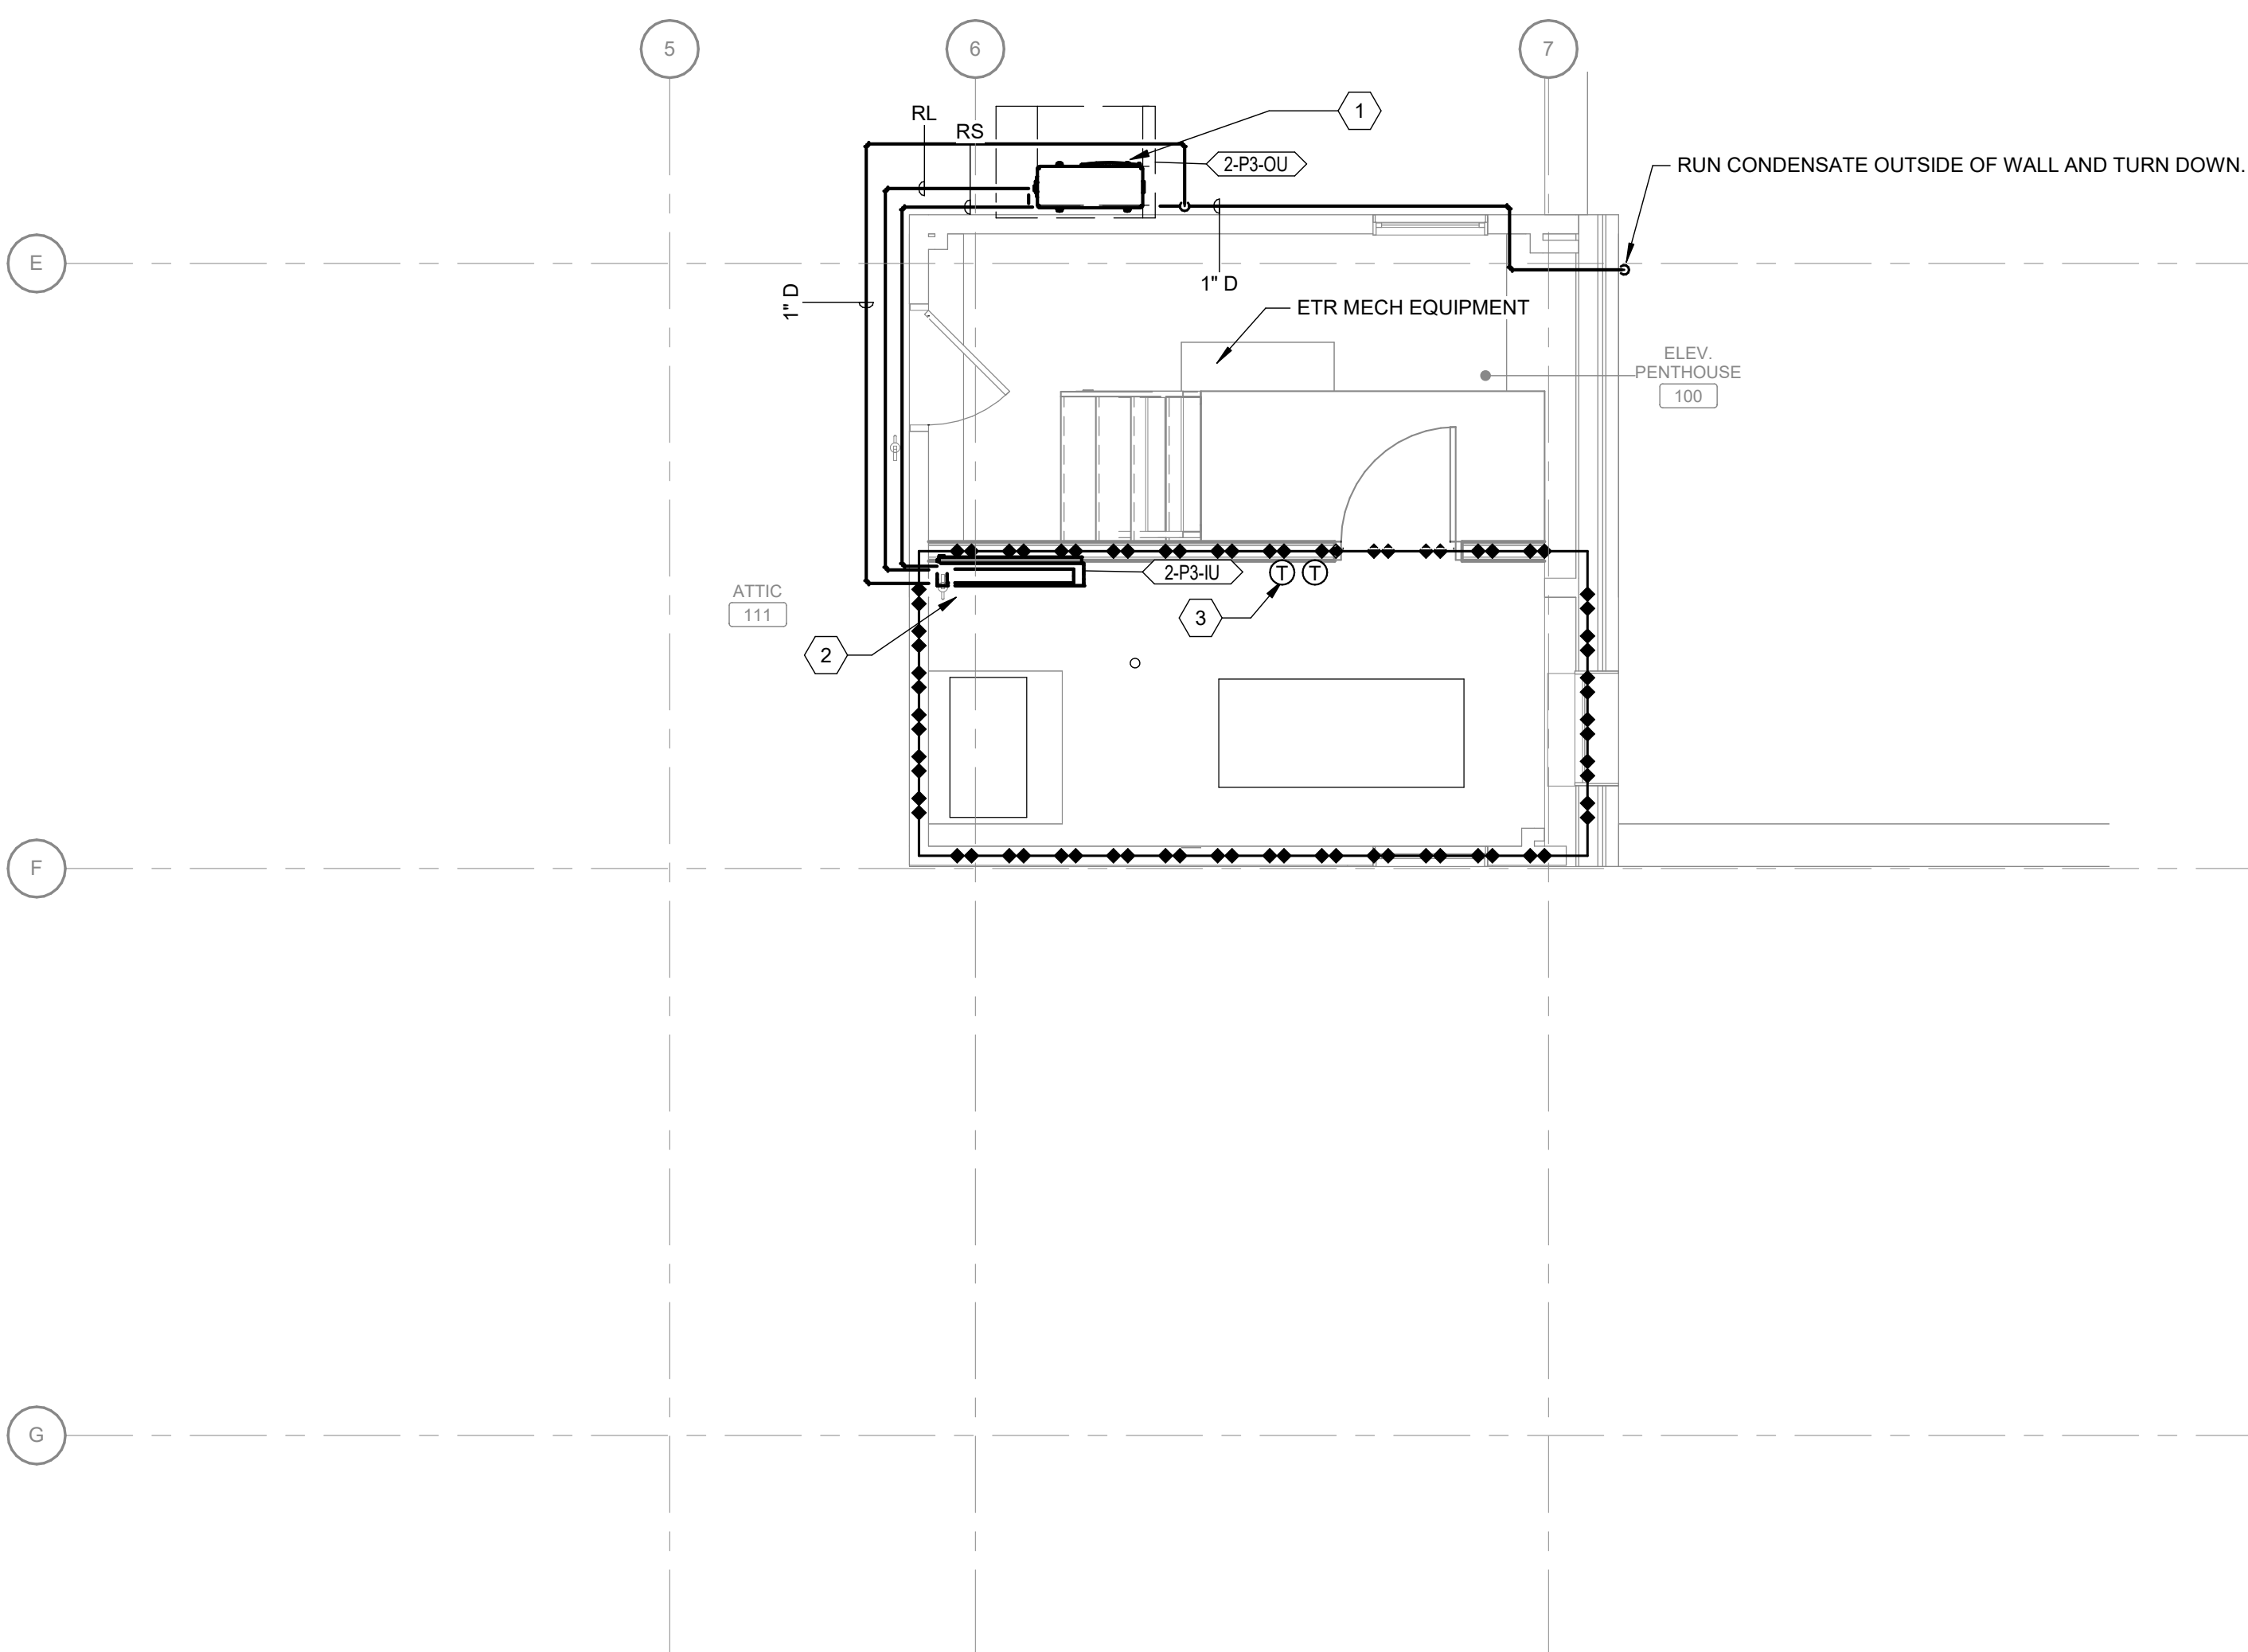

2 BUILDING 2 PARTIAL ATTIC MECHANICAL PLAN - P3
Scale: 1/4" = 1'-0"

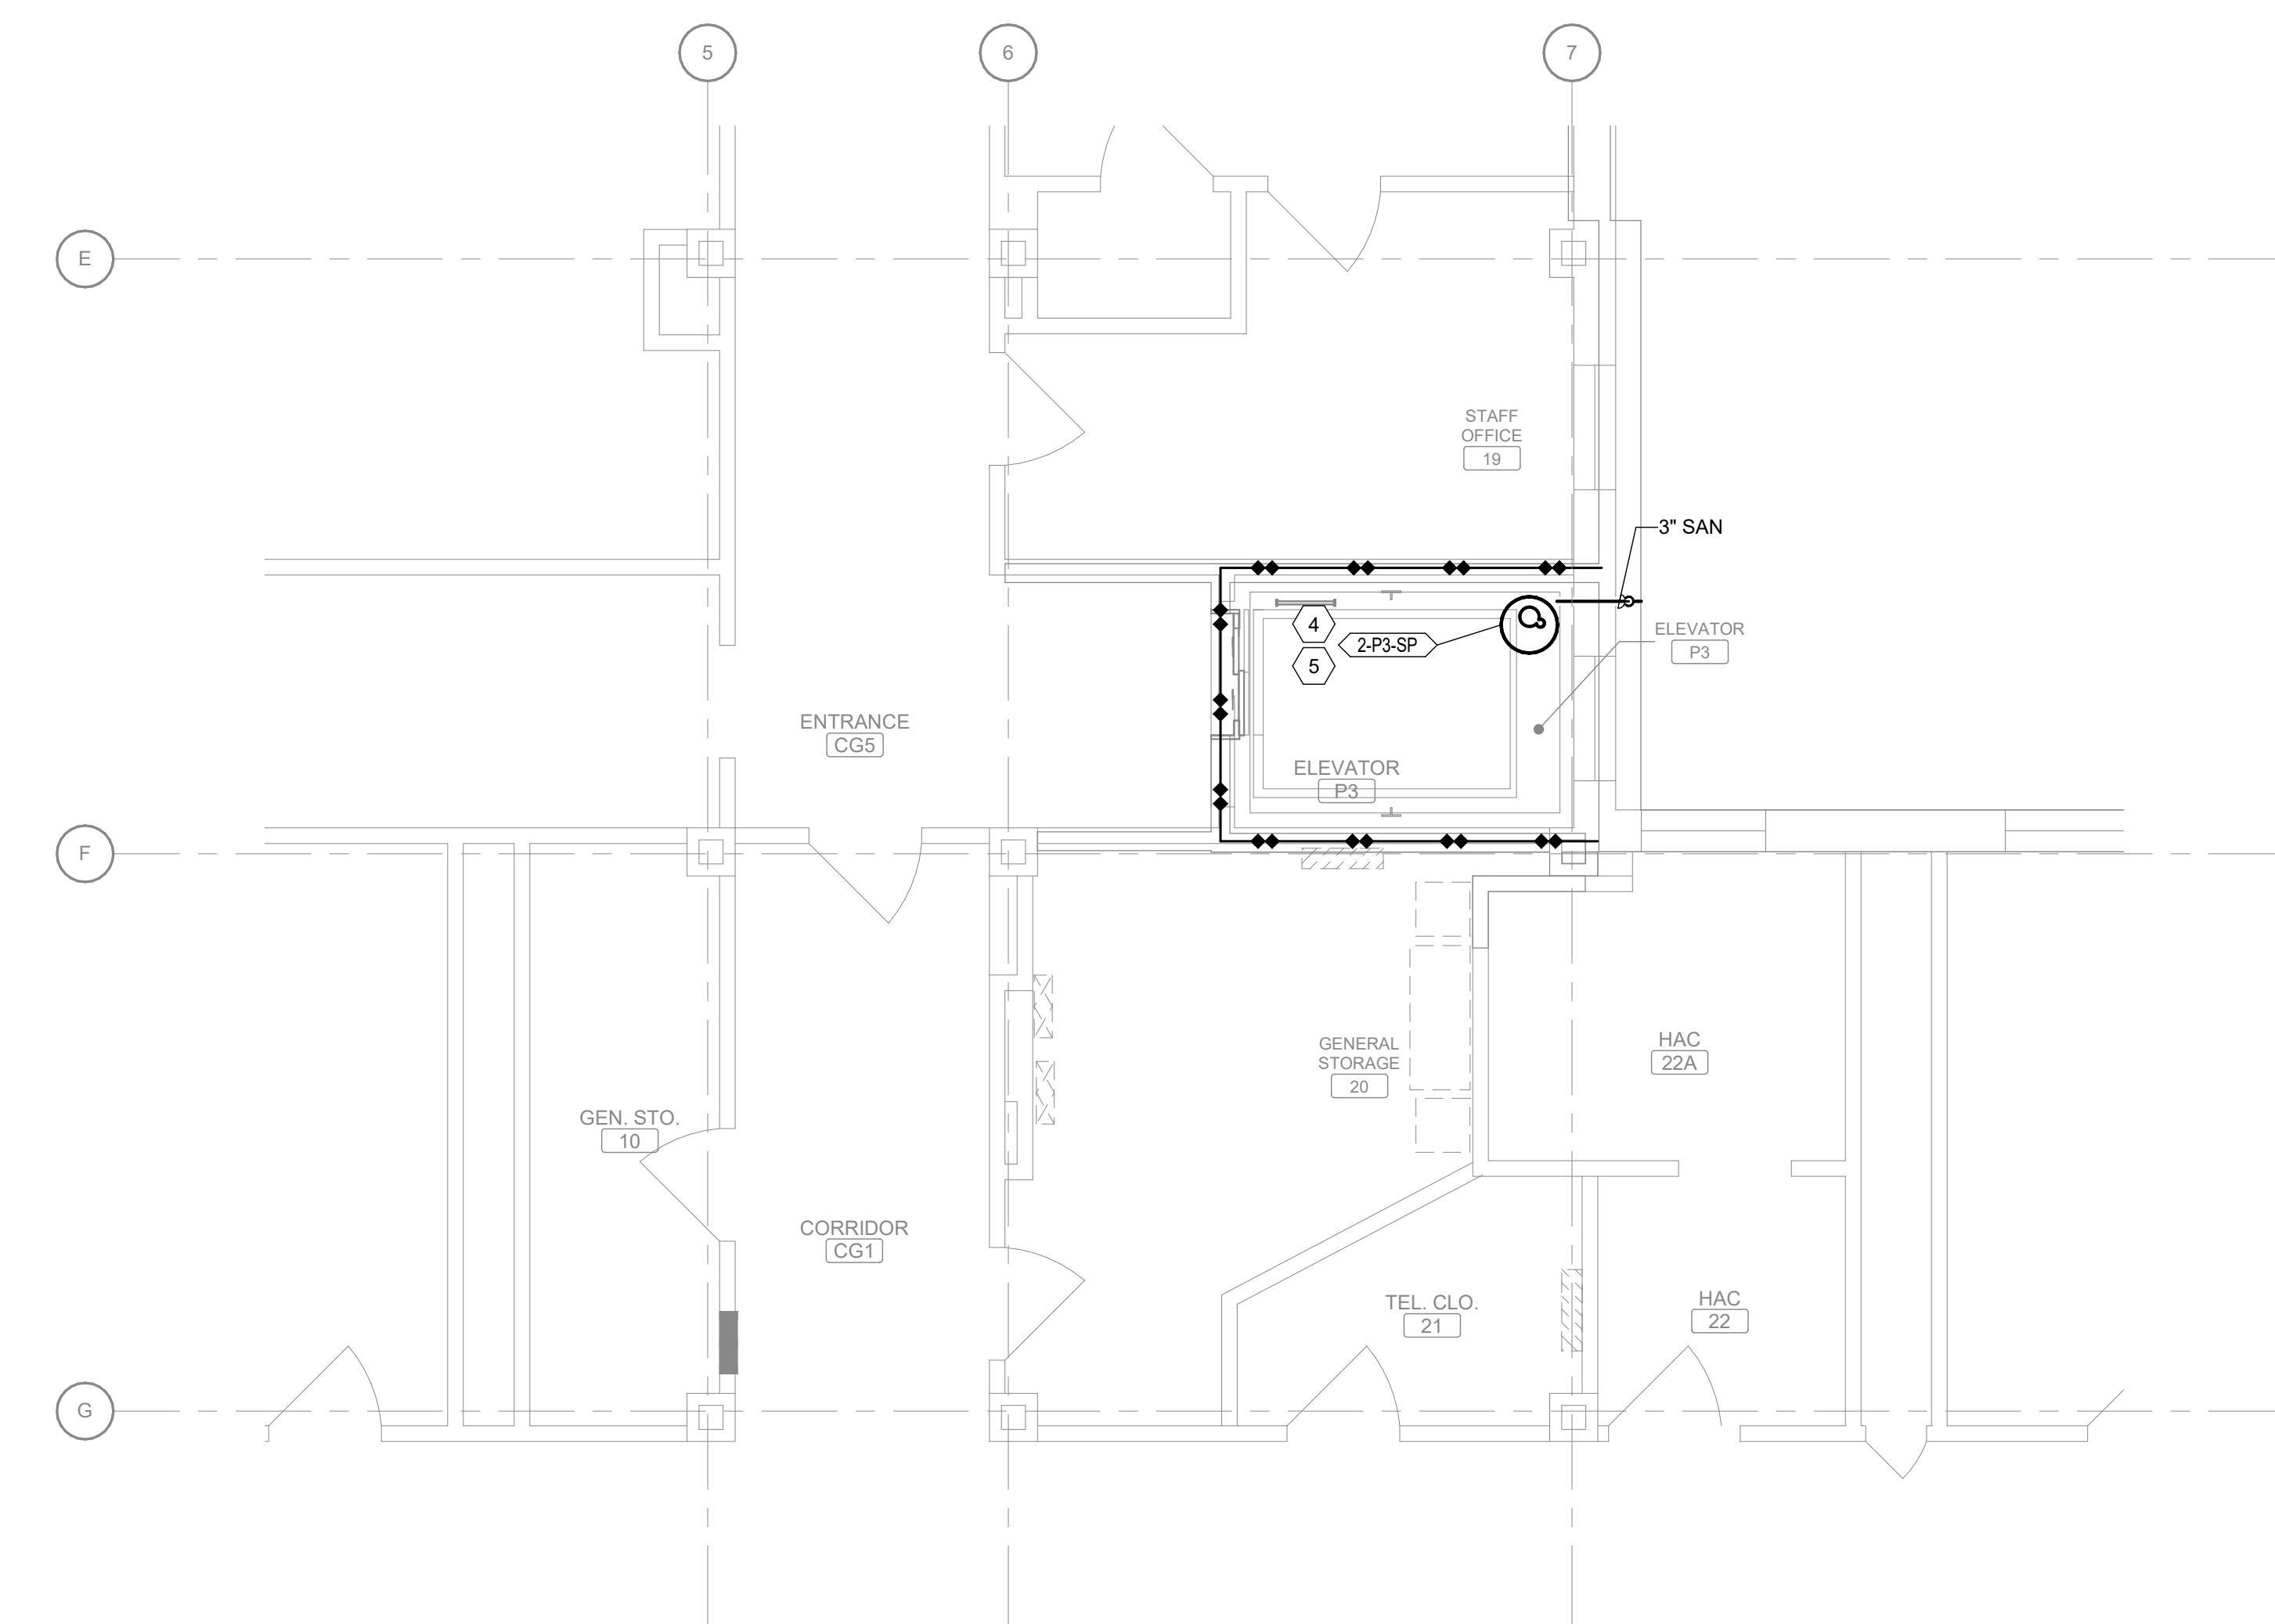

1 BUILDING 2 PARTIAL GROUND FLOOR MECHANICAL PLAN - P3
Scale: 1/4" = 1'-0"


SHEET NOTES:

1. REMOVE AND REPLACE ANY FIRE PROTECTION HEADS AFFECTED BY WORK.

KEY NOTES:

1. PROVIDE OUTDOOR SPLIT SYSTEM IN VENTED ATTIC AREA.
2. PROVIDE INDOOR SPLIT SYSTEM.
3. PROVIDE THERMOSTAT SERVING NEW SPLIT SYSTEM AND NEW DDC THERMOSTAT. MOUNT APPROX 48" AFF.
4. PROVIDE SUMP PUMP. ROUTE DISCHARGE TO EXTERIOR WITH SPLASH BLOCK AT DRAIN LOCATION.
5. PROVIDE 24" X 24" BY 6" DEEP SHALLOW SUMP PT.


KEY PLAN

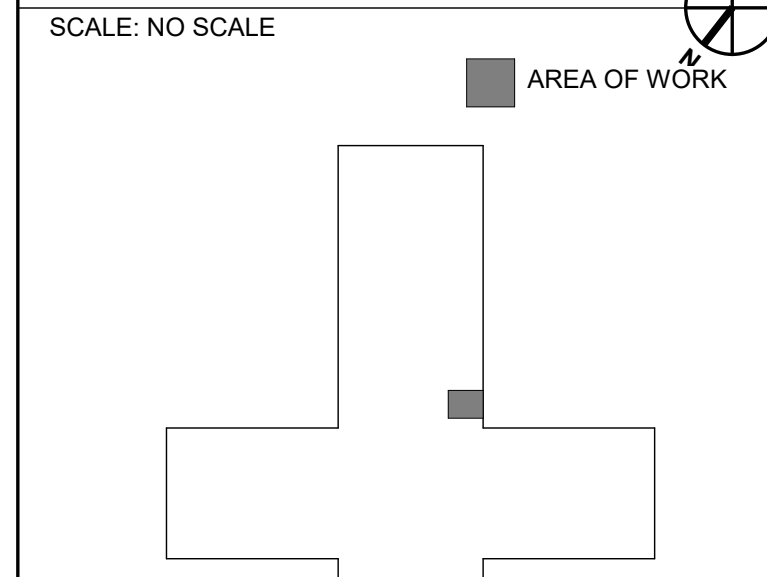


WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

**FULLY SPRINKLERED
100% BID DOCUMENTS**

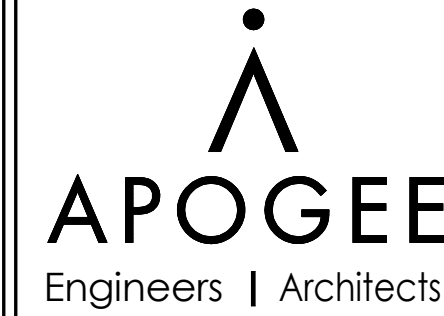CONSULTANTS:			PROJECT MANAGER		ACG Project Number 21-344		Office of Construction and Facilities Management		Drawing Title BUILDING 2 PARTIAL MECHANICAL FLOOR PLANS - P3		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
 Michael Blades & Associates, Ltd Elevator and Escalator Consulting			 APOGEE Engineers Architects www.acg-pa.com		Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511 919-858-7420		U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC, VISN 7		Approved		Drawing Number 2.M-101	
# Revisions: Date									Date FEBRUARY 6, 2025		Checked SWR		Drawn AV	
													Dwg 4 of 10	

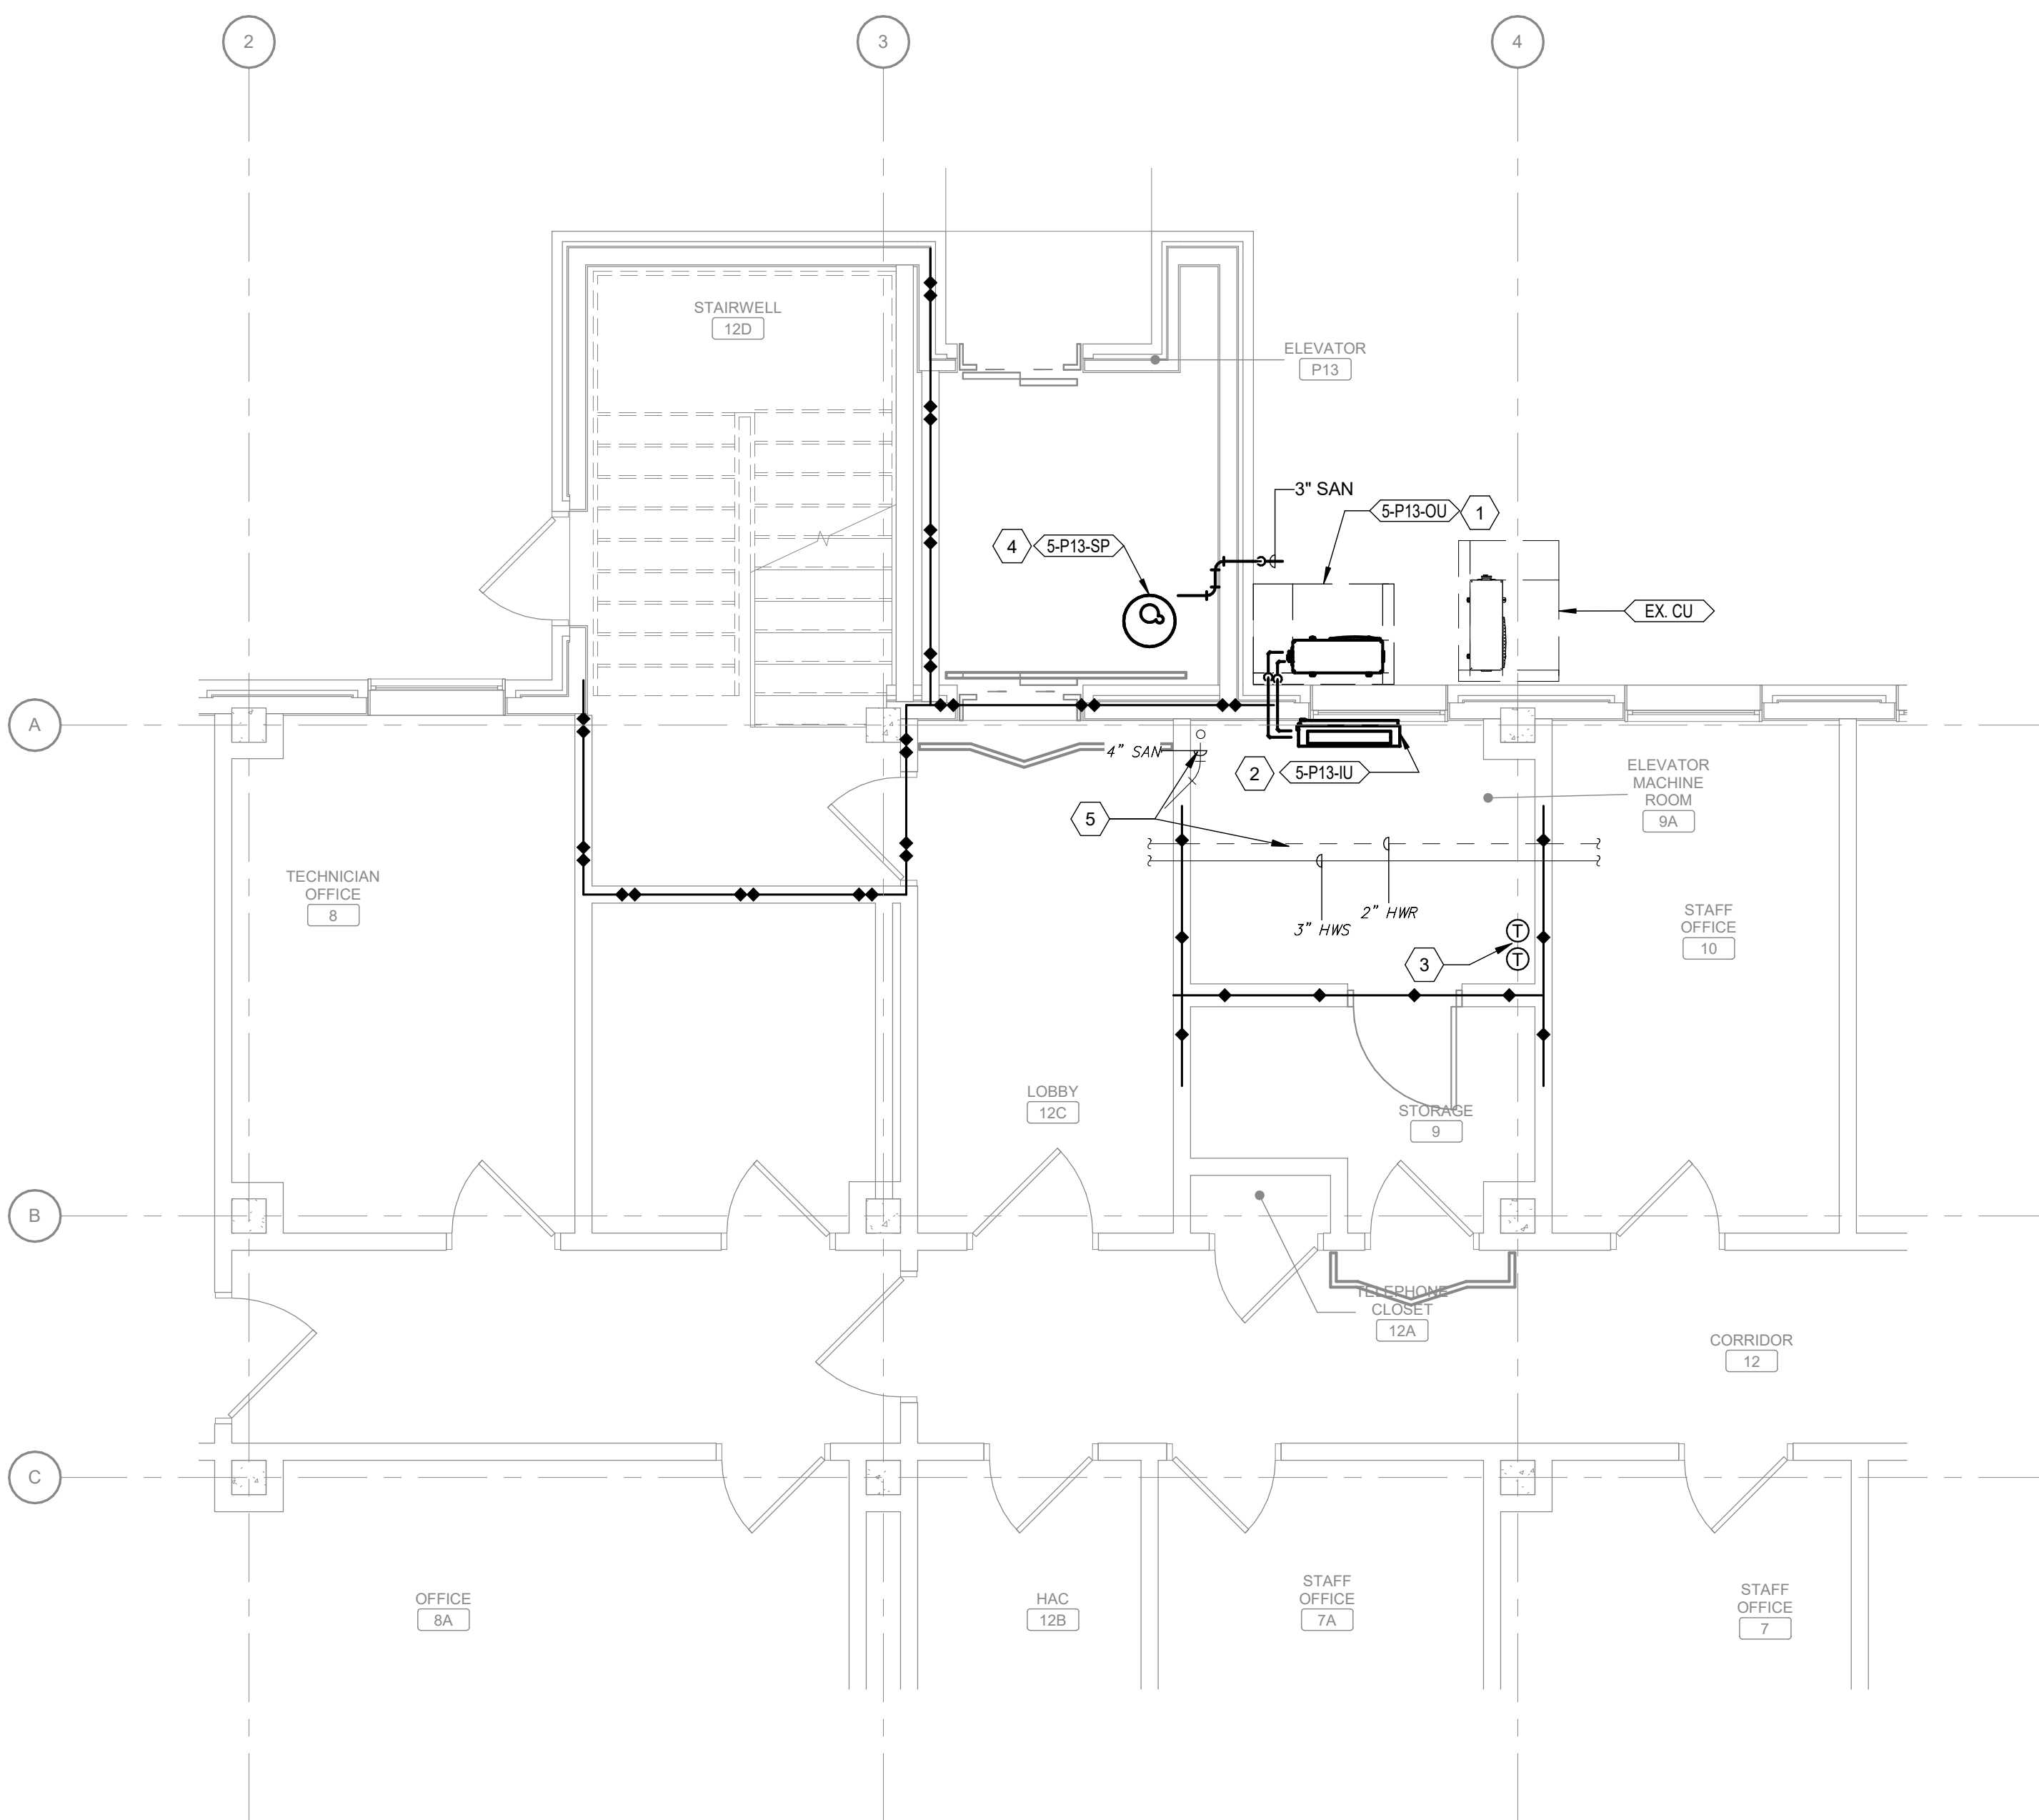

2 BUILDING 5 PARTIAL BASEMENT FLOOR MECHANICAL PLAN
Scale: 1/4" = 1'-0"

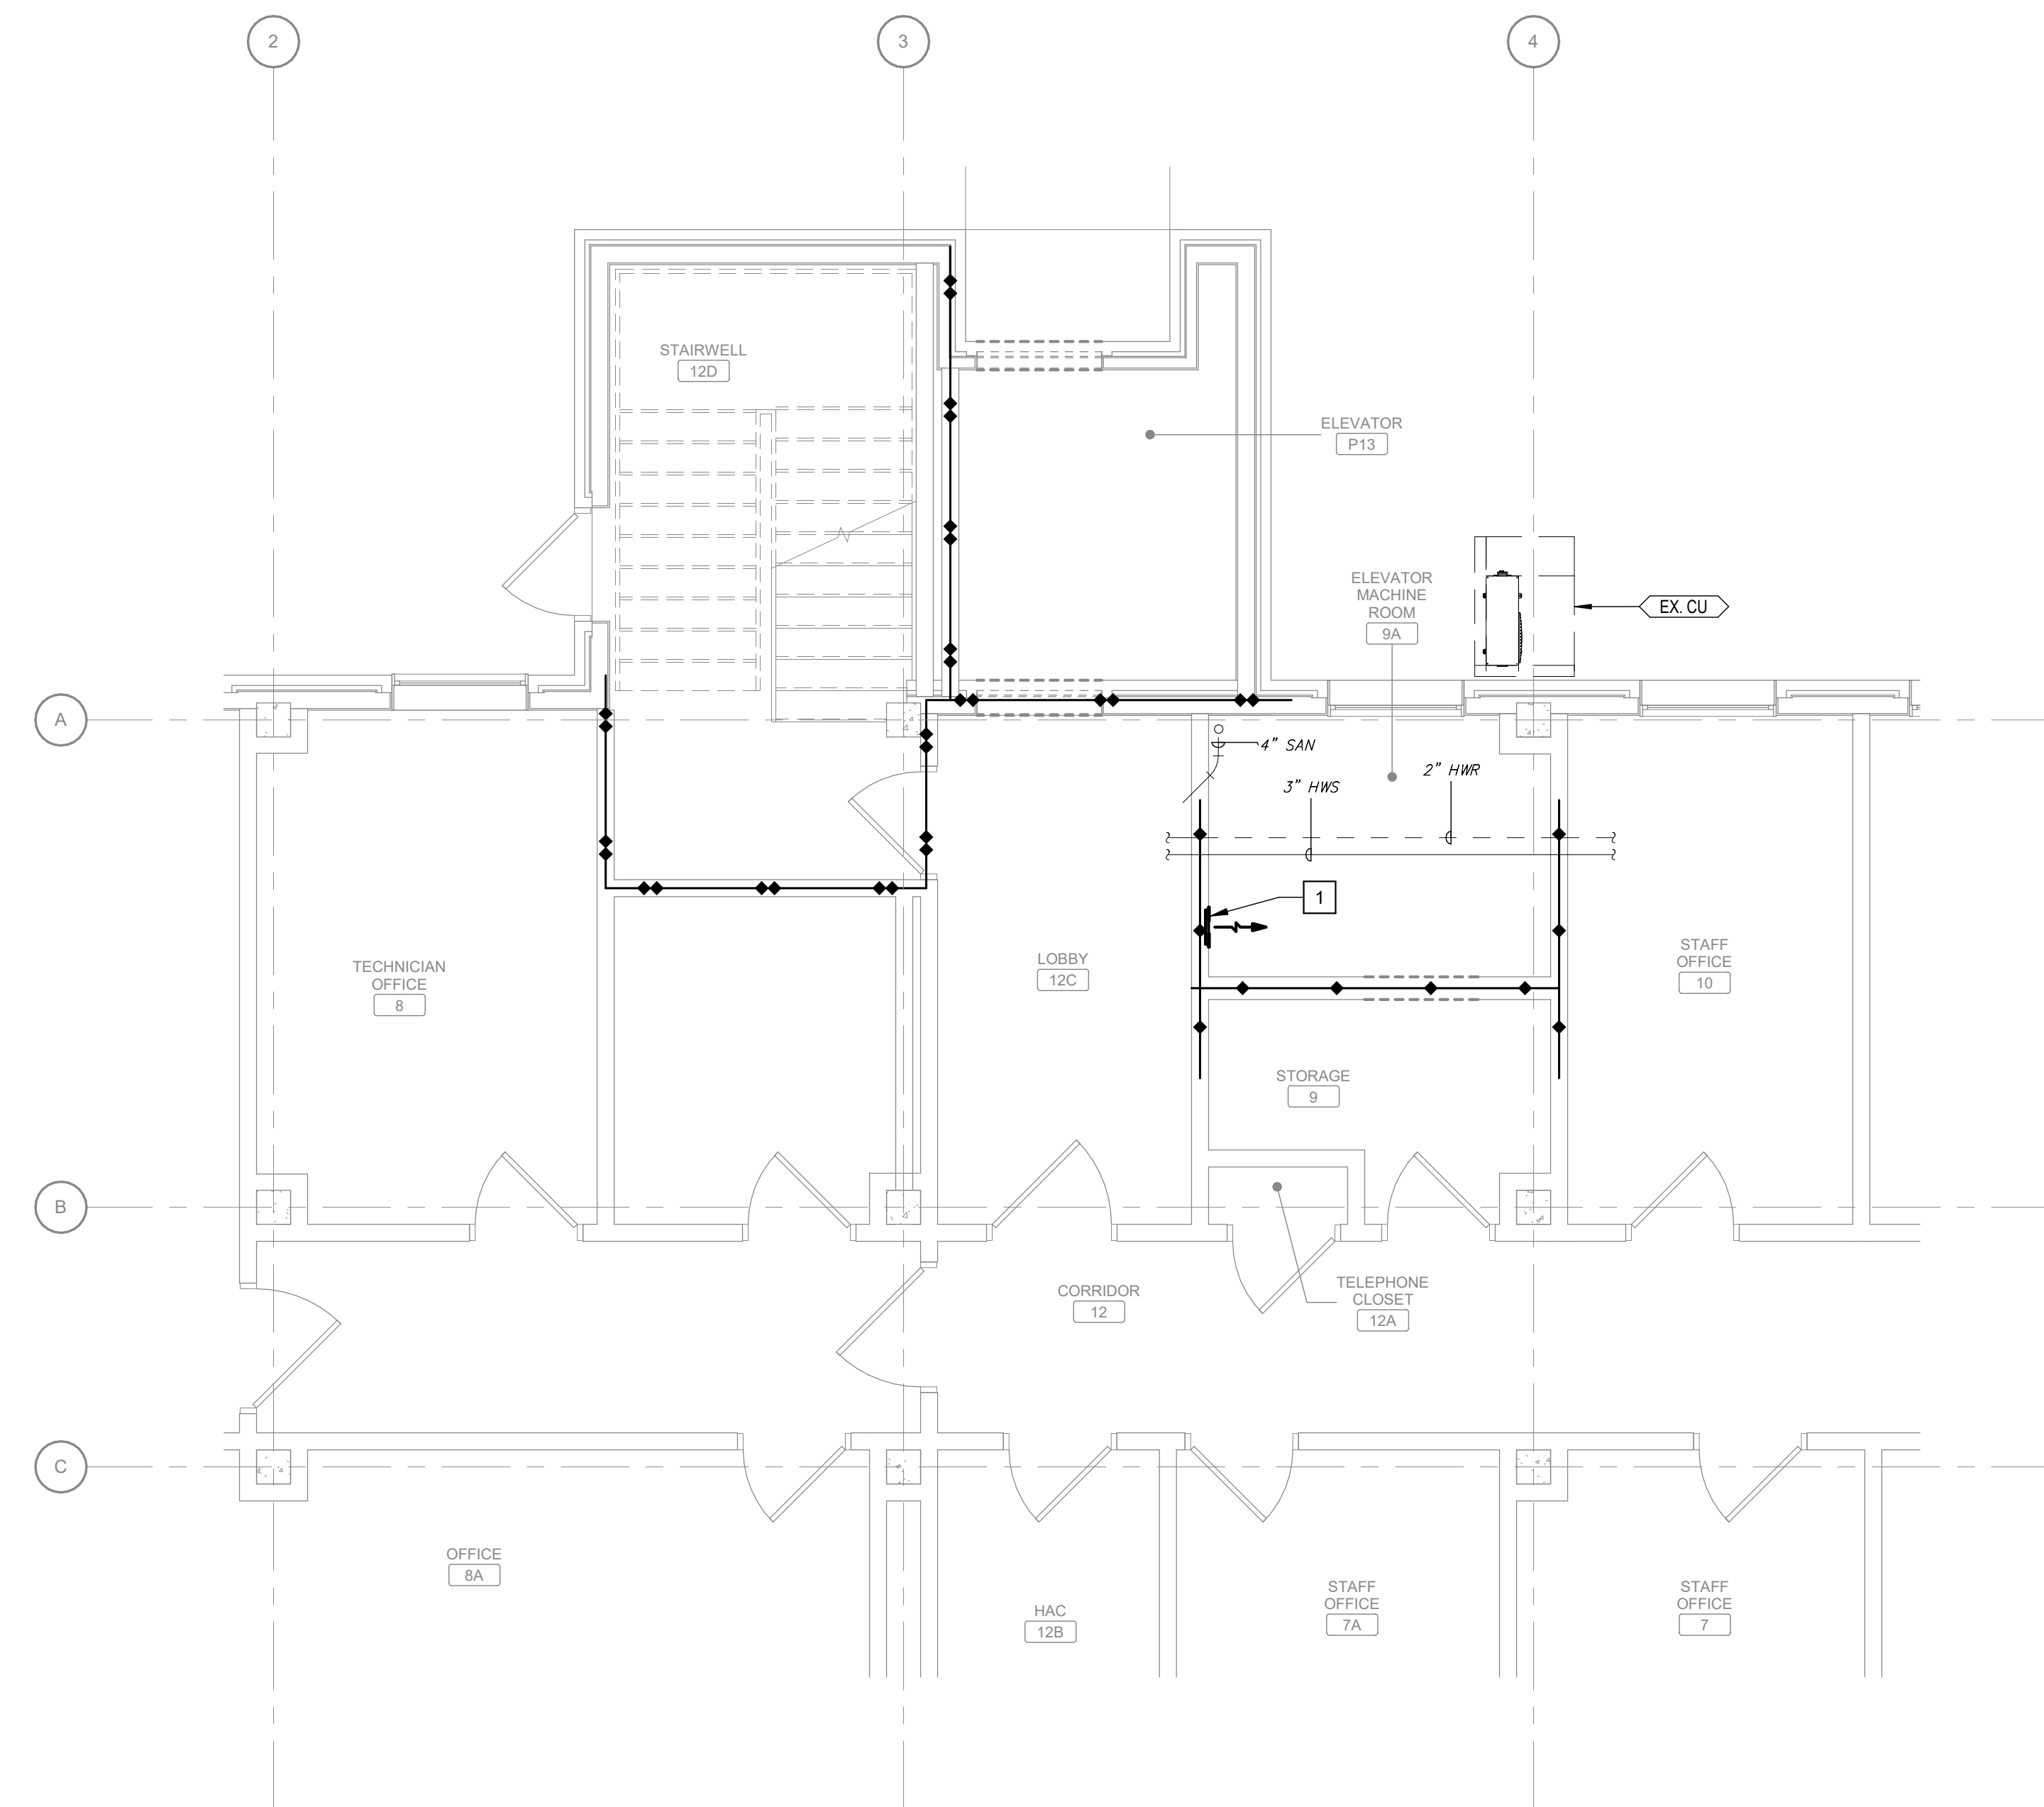

1 BUILDING 5 PARTIAL BASEMENT FLOOR MECHANICAL DEMOLITION PLAN
Scale: 1/4" = 1'-0"

SHEET NOTES:

1. REMOVE AND REPLACE ANY FIRE PROTECTION HEADS AFFECTED BY WORK.

KEY NOTES:

- 1 DEMOLISH SIDEWALL SUPPLY GRILLE AND CAP.

 KEY NOTES:

- | | |
|---|--|
| 1 | PROVIDE OUTDOOR SPLIT SYSTEM ON GRADE ON NEW EQUIPMENT PAD. |
| 2 | PROVIDE INDOOR SPLIT SYSTEM. |
| 3 | PROVIDE THERMOSTAT SERVING NEW SPLIT SYSTEM AND NEW DDC THERMOSTAT. MOUNT APPROX 48" AFF. |
| 4 | PROVIDE SUMP PUMP. ROUTE DISCHARGE TO EXTERIOR WITH SPLASH BLOCK AT DRAIN LOCATION. |
| 5 | PROVIDE DRAIN PAN UNDERNEATH CROSSING HYDRONIC / SANITARY PIPING. PROVIDE EMERGENCY WATER SENSOR IN DRAIN PAN. |

KEY PLAN

SCALE: NO SCALE



 AREA OF WORK




WALL RATING LEGEND

-
- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

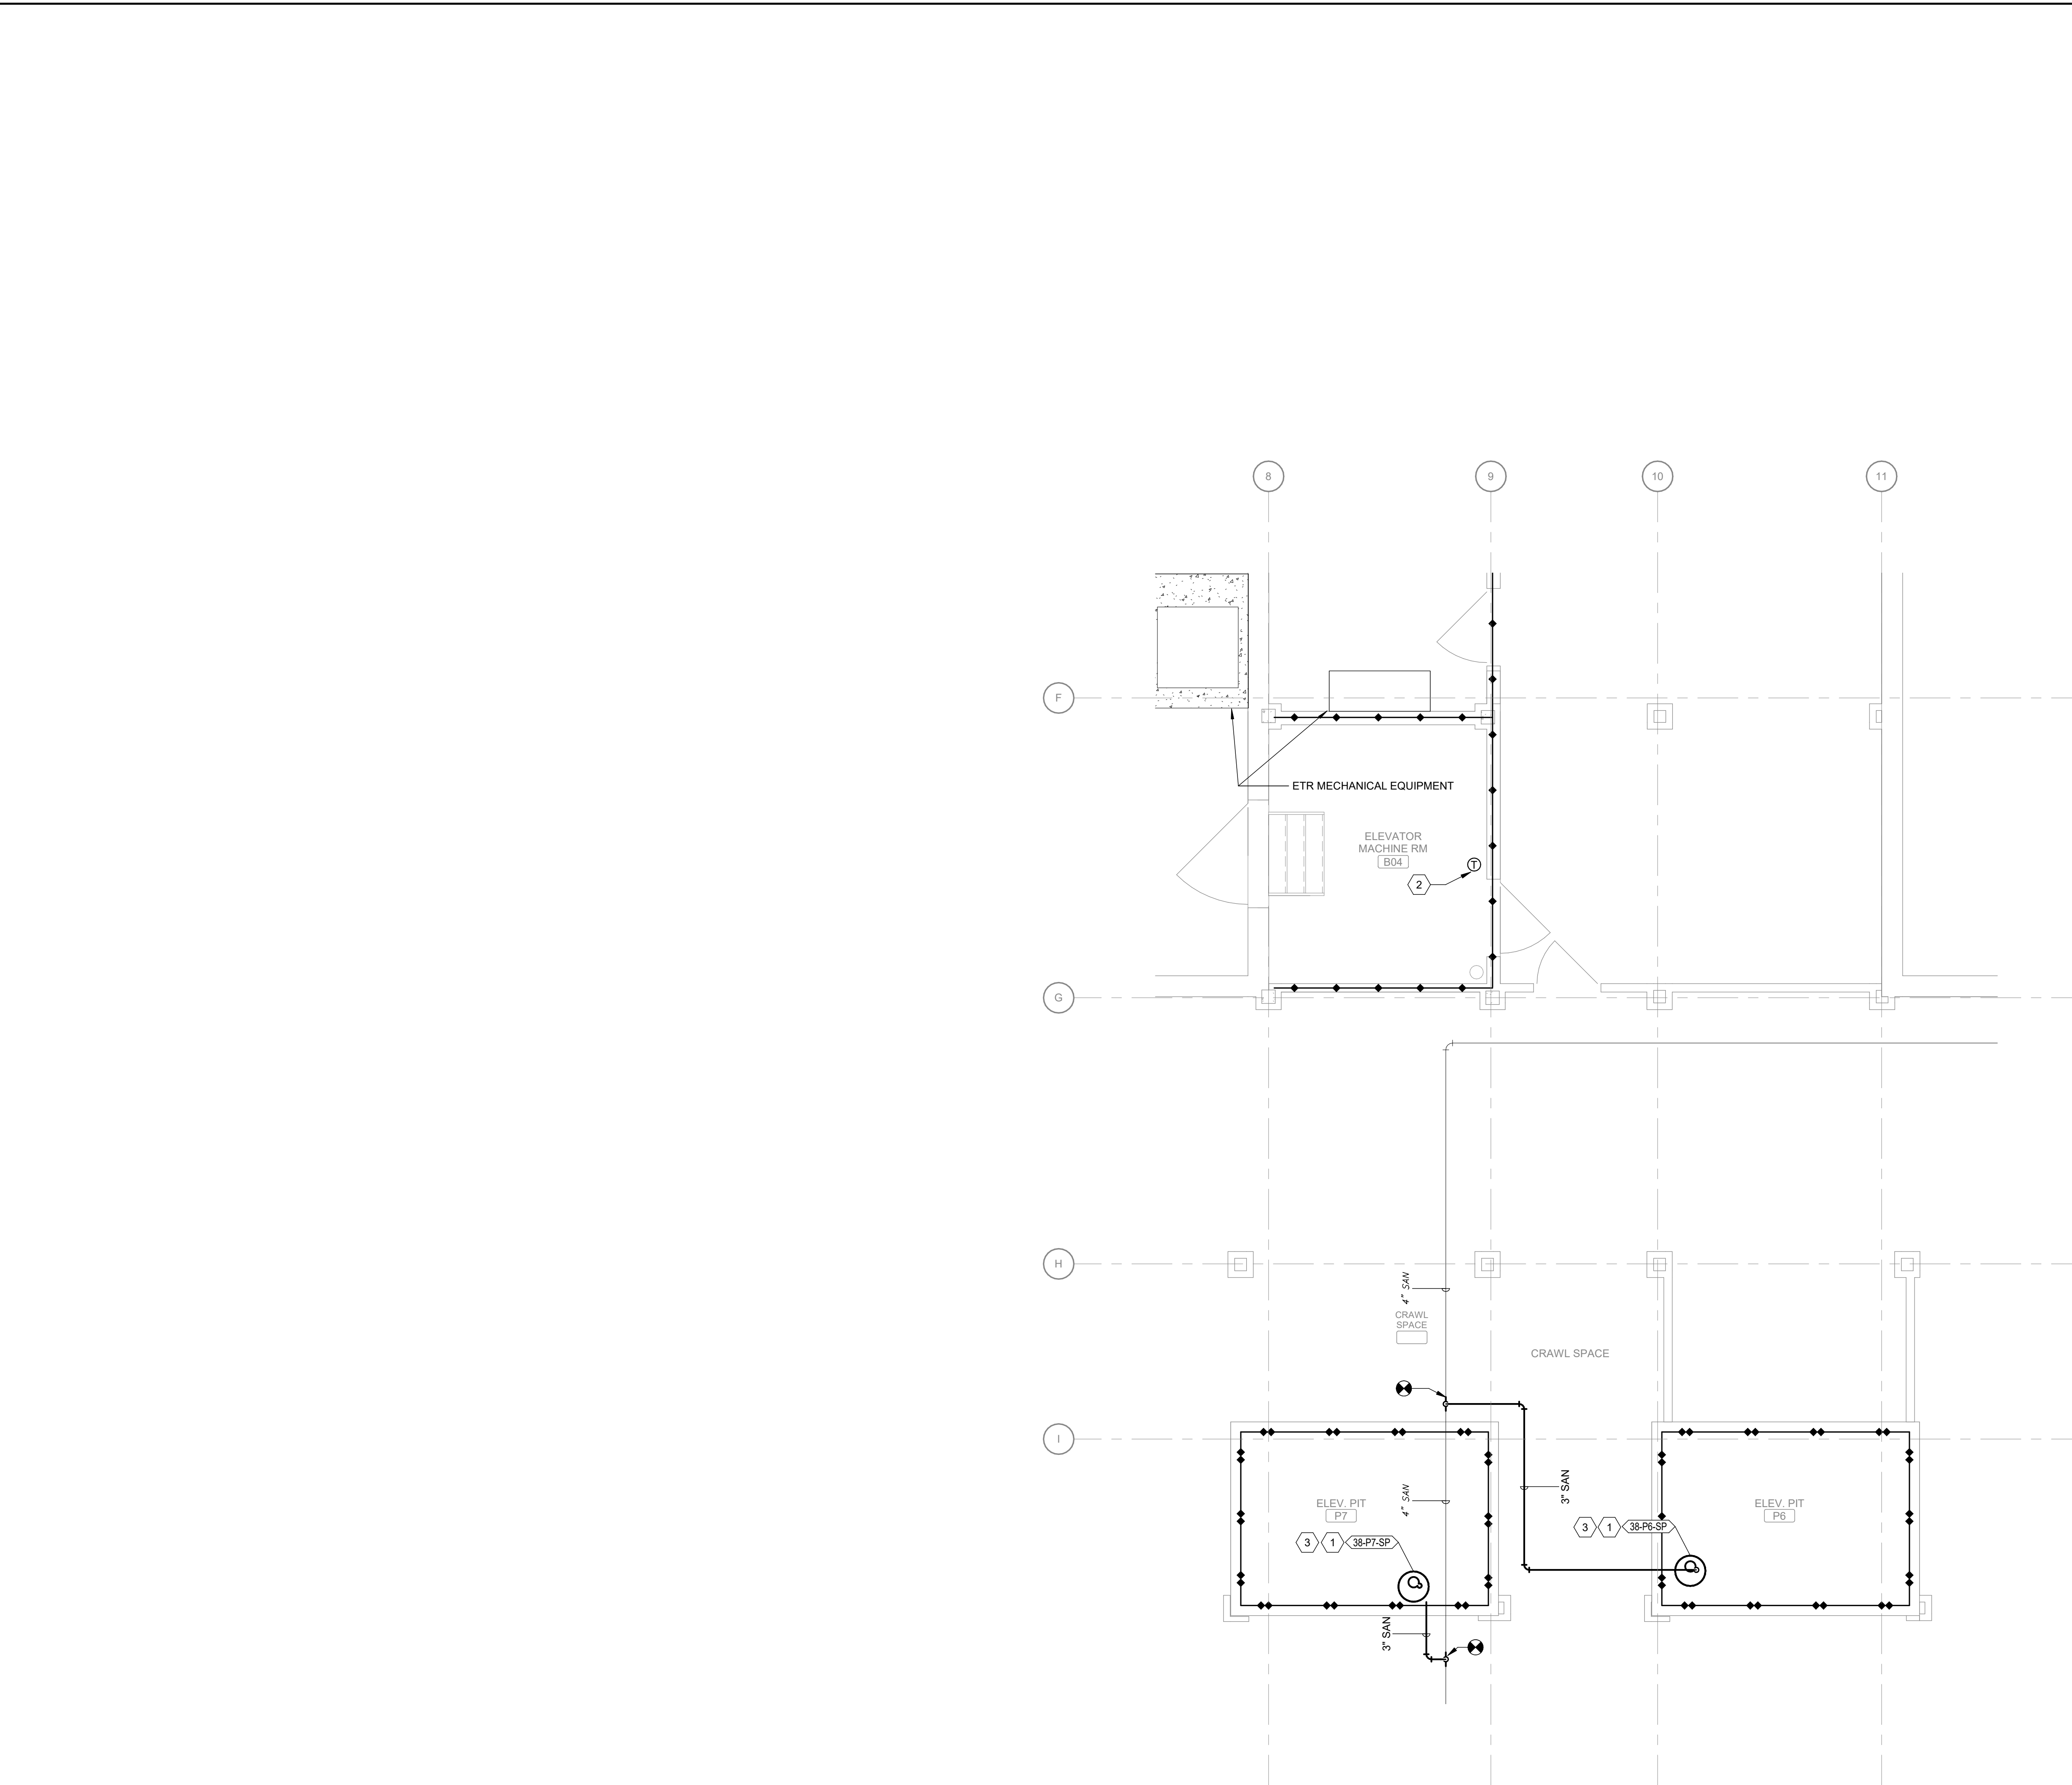

1 BUILDNG 38 PARTIAL BASEMENT FLOOR MECHANICAL PLAN - P6 & P7
Scale: 1/4" = 1'-0"

SHEET NOTES:


1. REMOVE AND REPLACE ANY FIRE PROTECTION HEADS AFFECTED BY WORK.

KEY NOTES:

1. PROVIDE SUMP PUMP. ROUTE DISCHARGE TO EXISTING 4" SANITARY PIPE IN CRAWLSPACE. CONNECT TO SANITARY PIPING WITH AN AIR GAP FITTING.
2. PROVIDE THERMOSTAT SERVING NEW DDC THERMOSTAT. MOUNT APPROX 48" AFF.
3. PROVIDE 24" X 24" BY 6" DEEP SHALLOW SUMP PIT.

KEY PLAN

SCALE: NO SCALE

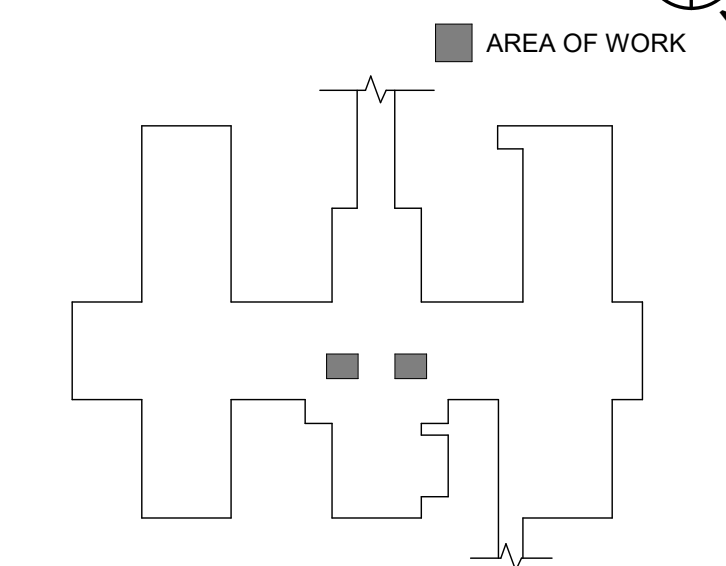


WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
2 HR - FIRE SEPARATION
SMOKE RESISTIVE HAZARDOUS AREA

**FULLY SPRINKLERED
100% BID DOCUMENTS**


CONSULTANTS:			PROJECT MANAGER		ACG Project Number 21-344		Office of Construction and Facilities Management		Drawing Title BUILDING 38 PARTIAL MECHANICAL FLOOR PLAN - P6 & P7		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
 Michael Blades & Associates, Ltd Elevator and Escalator Consulting			 SEAN WILLIAM REID Lic. No. 0402064126 PROFESSIONAL ENGINEER 2/5/2025		 APOGEE Engineers Architects © COPYRIGHT Apogee Consulting Group, P.A.		Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511 www.acg-pa.com 919-858-7420		Location TUSCALOOSA VAMC, VISN 7		Approved		Drawing Number 38.M-101	
# Revisions: Date							VA U.S. Department of Veterans Affairs		Date FEBRUARY 6, 2025		Checked SWR		Drawn AV	
													Dwg 6 of 10	

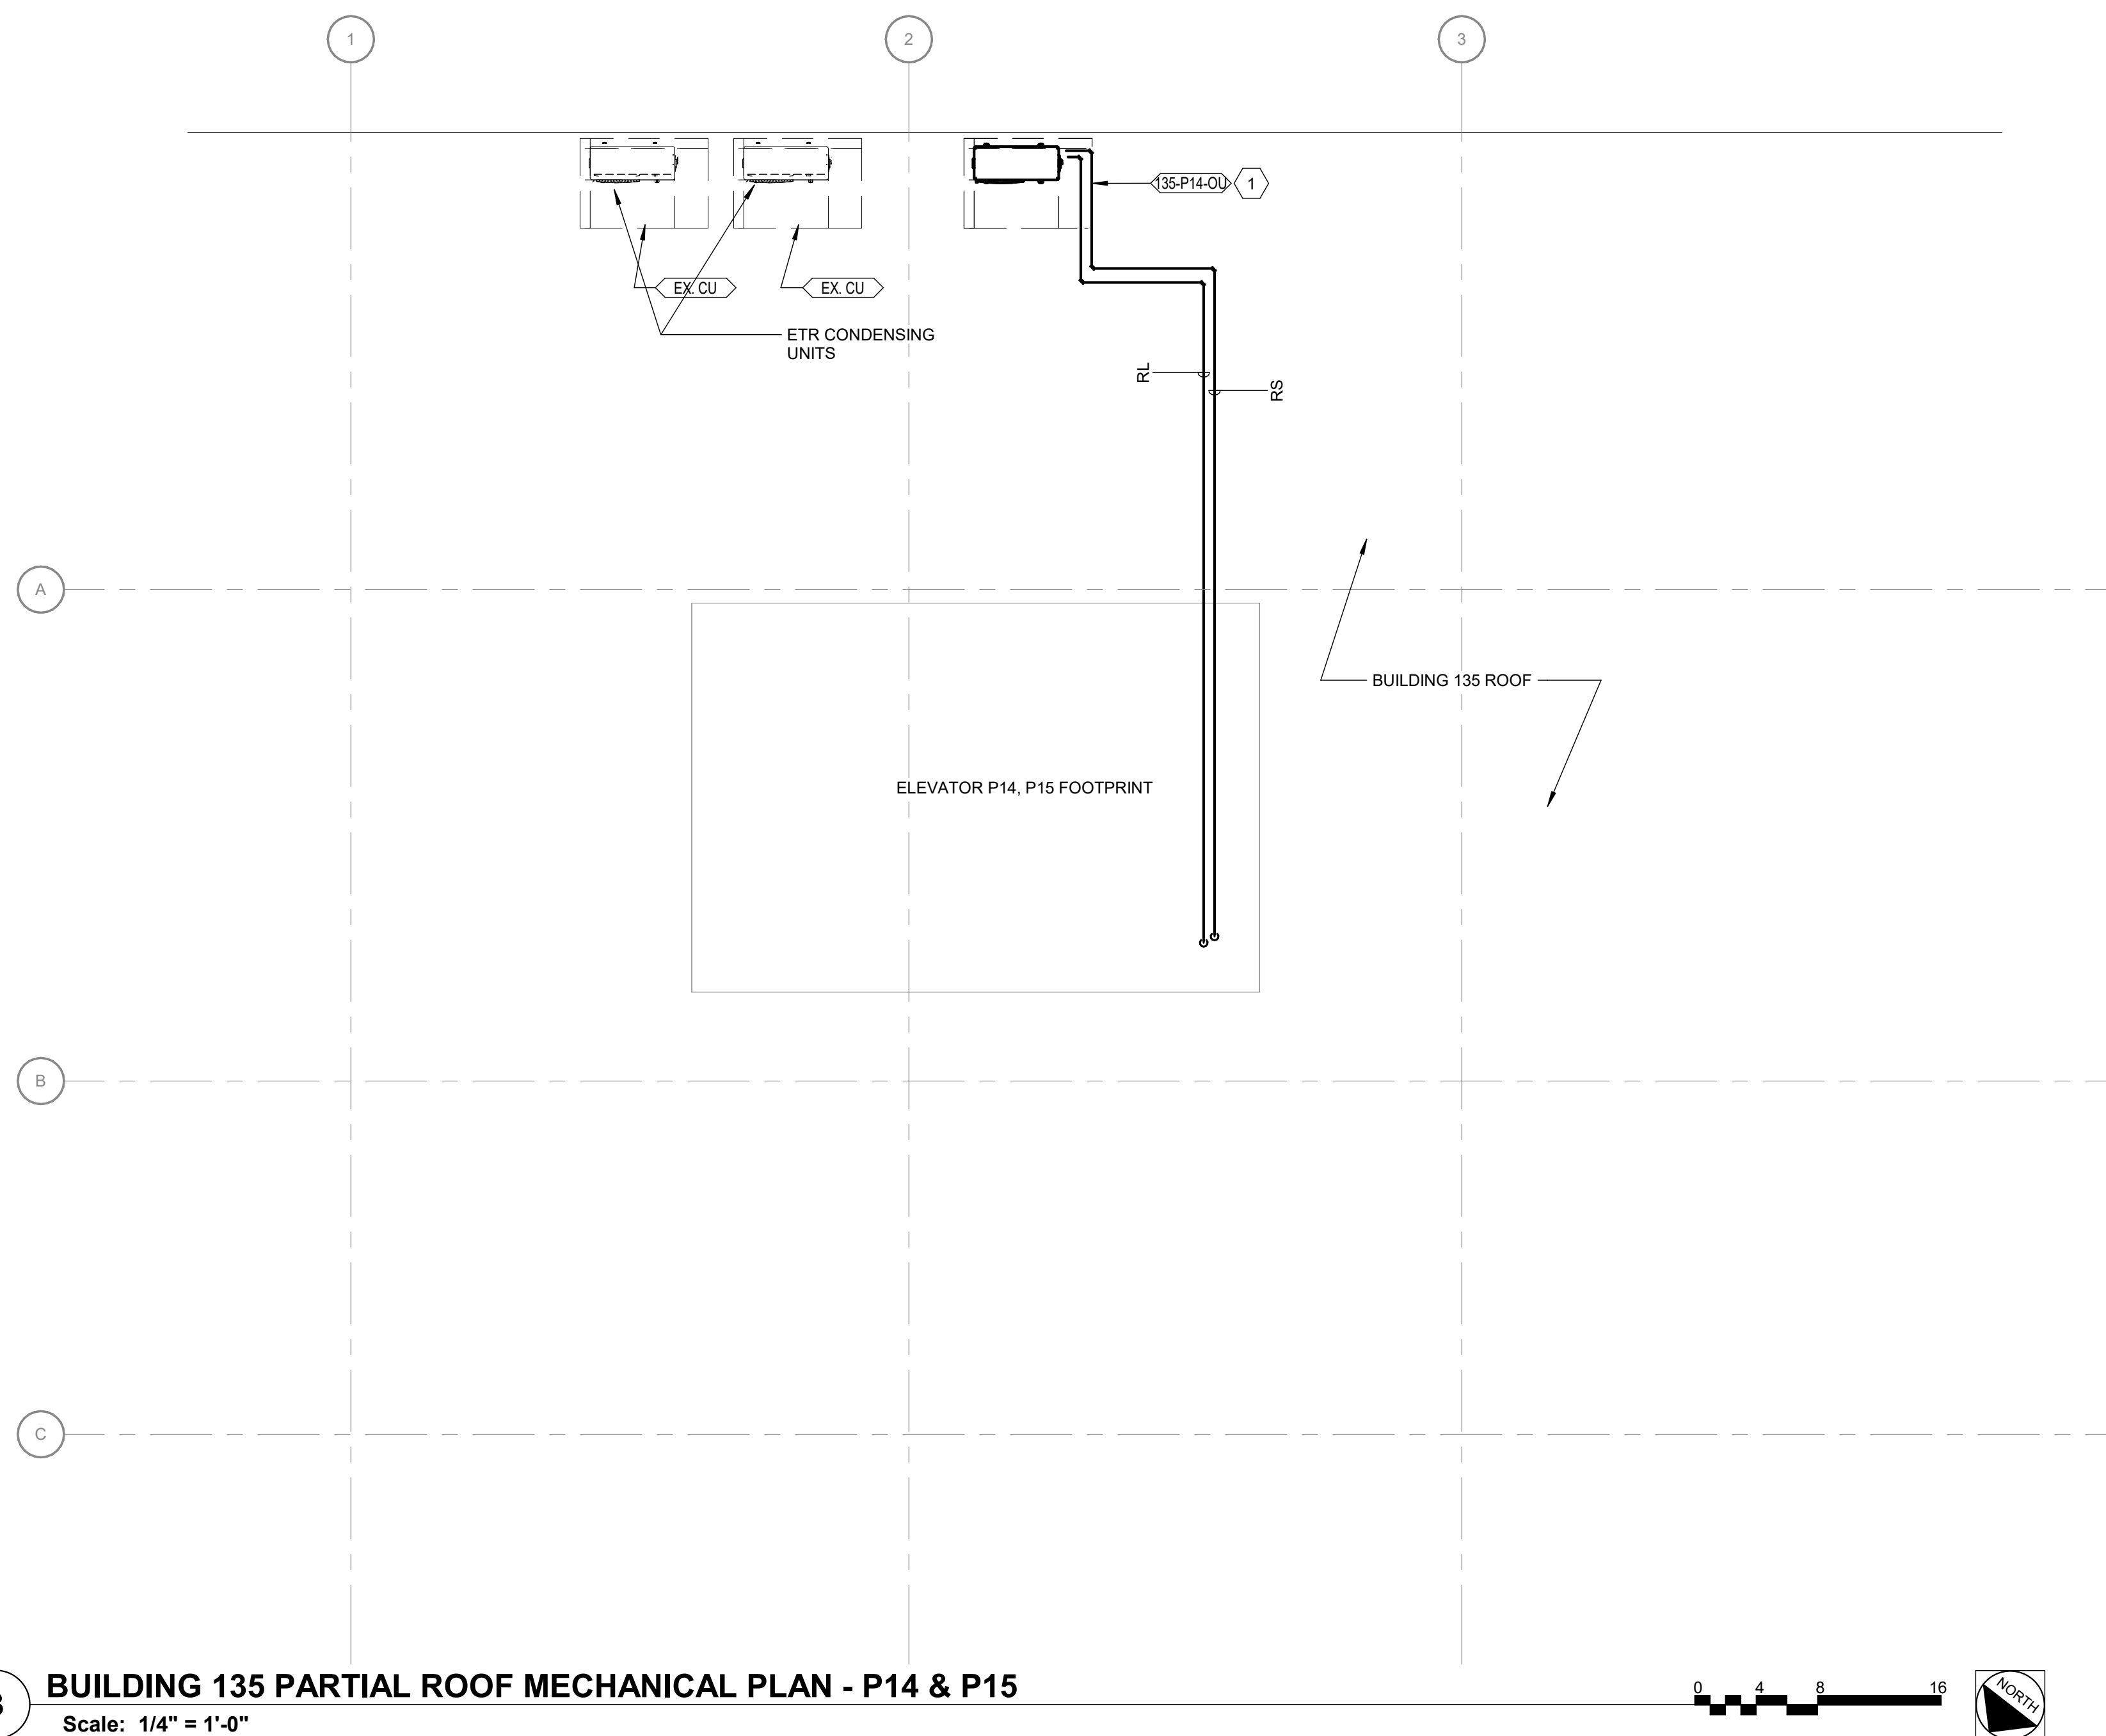

3 BUILDING 135 PARTIAL ROOF MECHANICAL PLAN - P14 & P15
Scale: 1/4" = 1'-0"

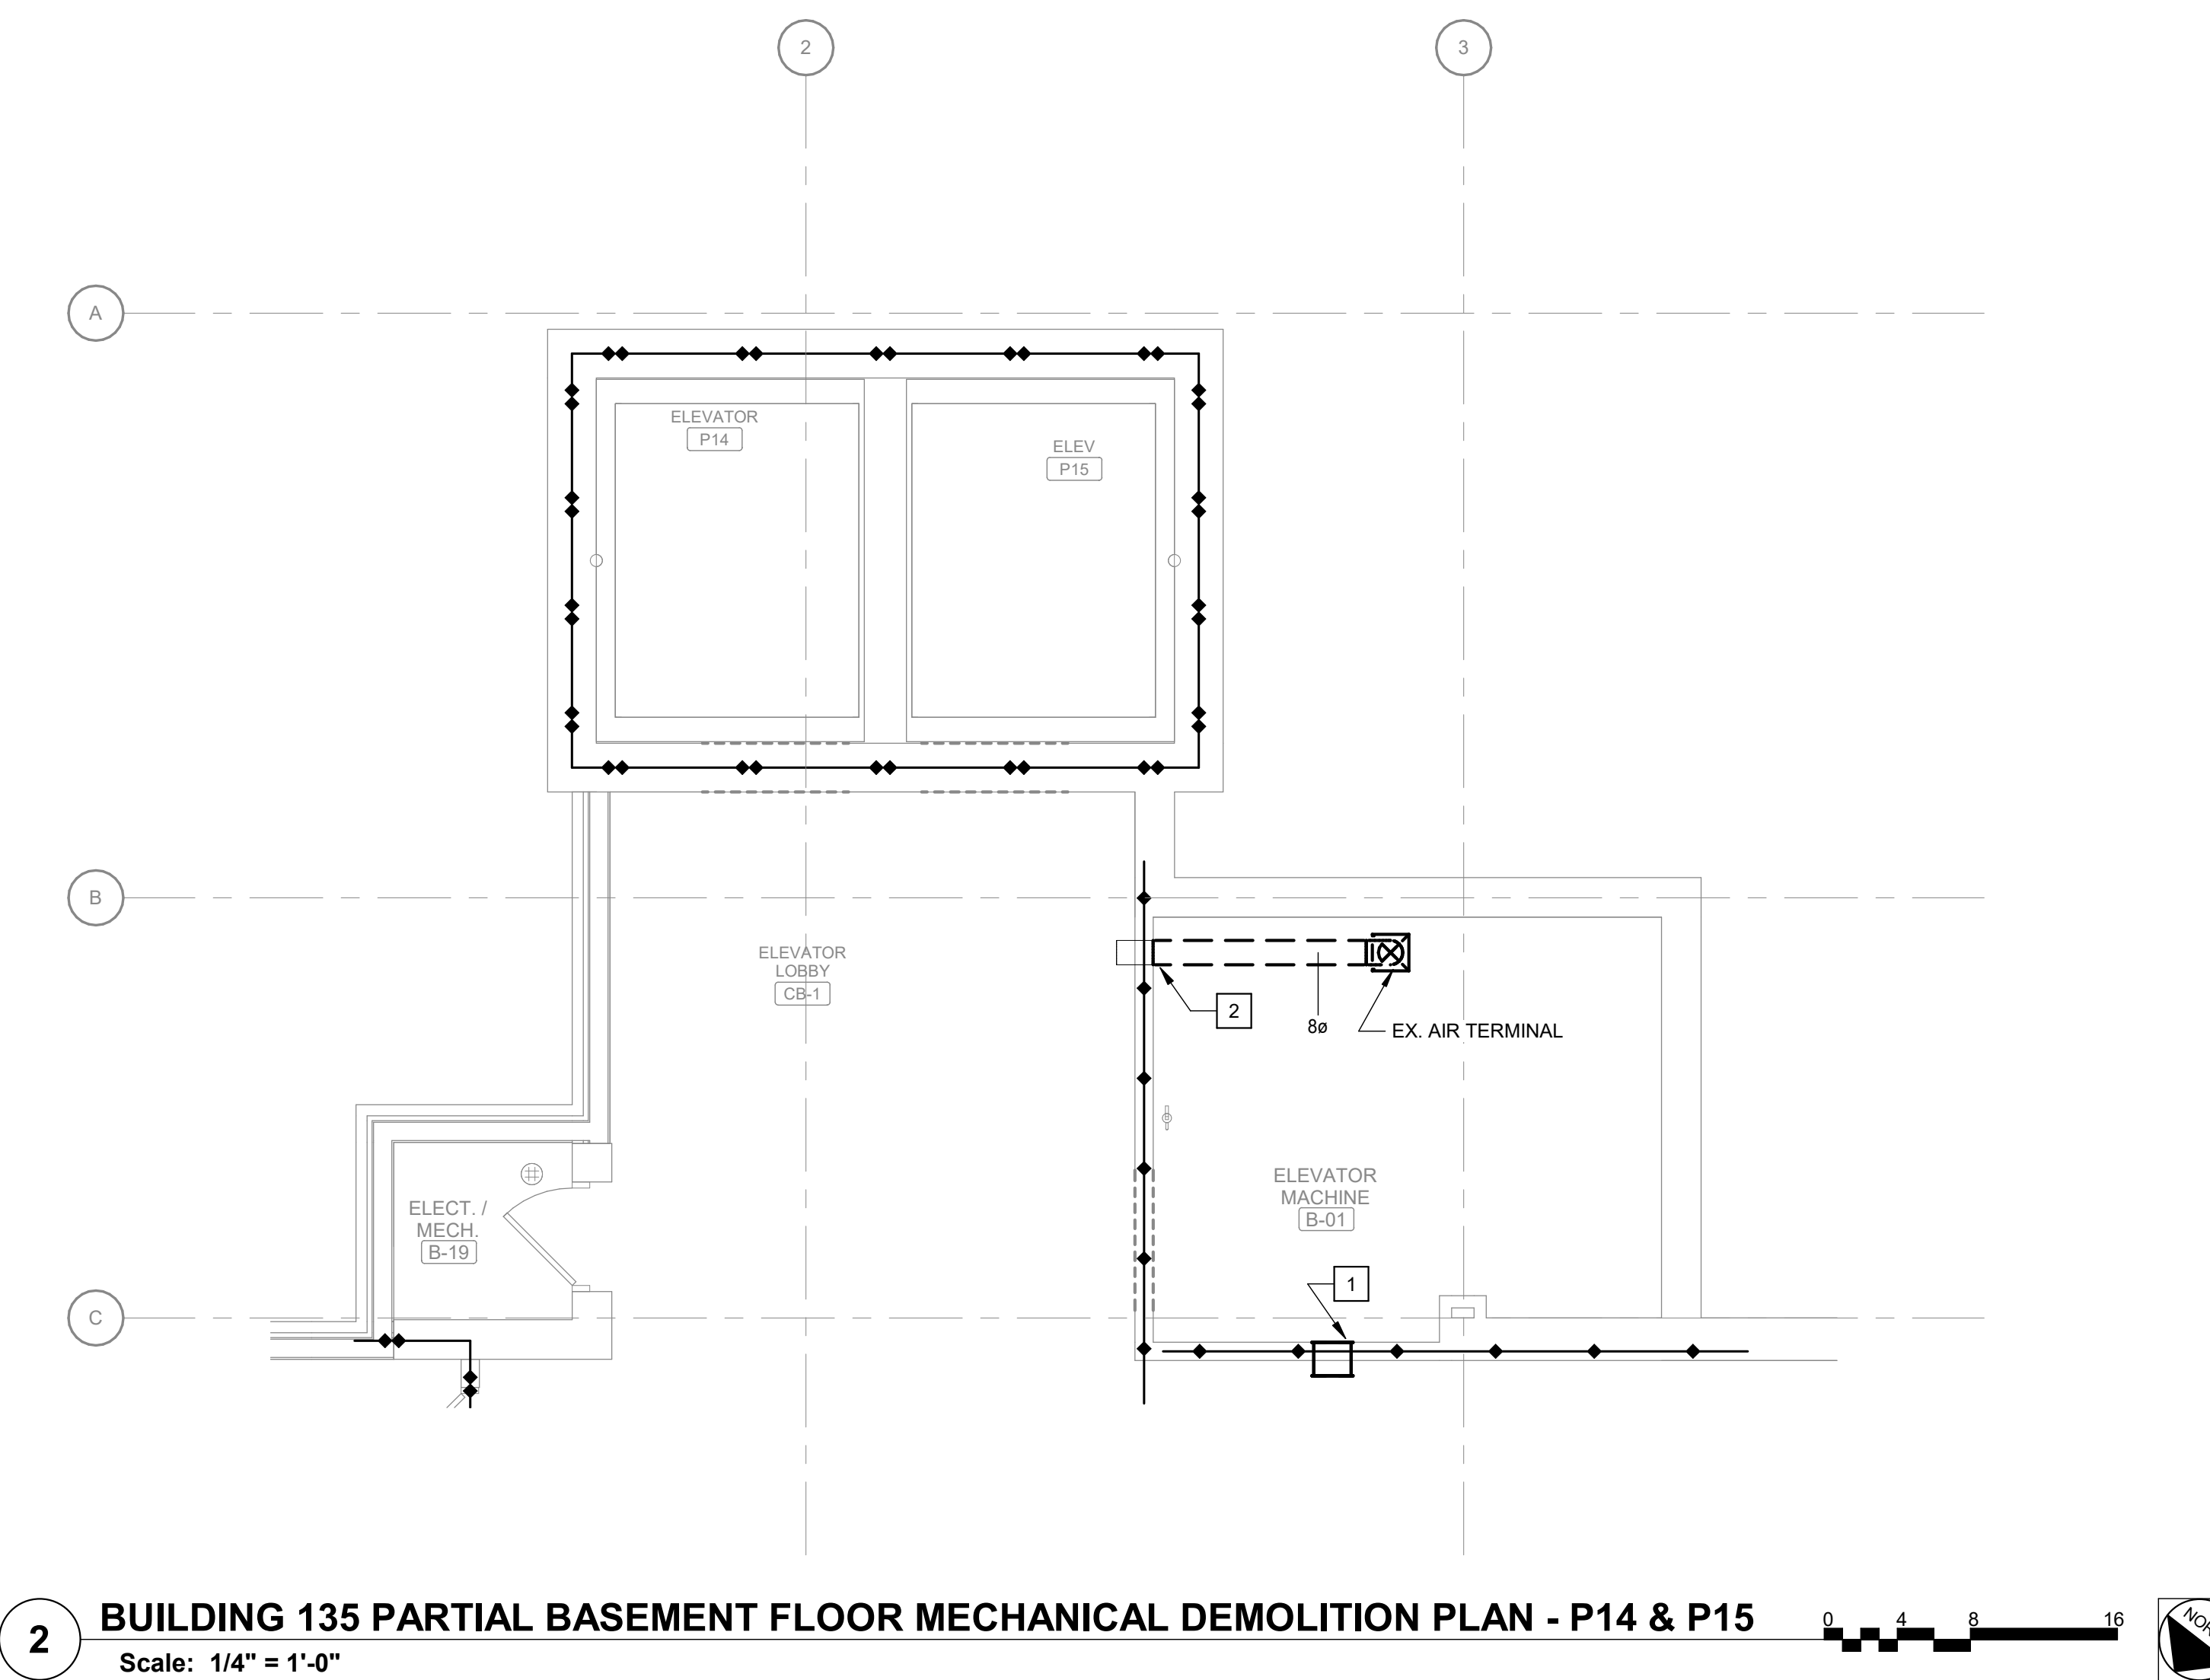

2 BUILDING 135 PARTIAL BASEMENT FLOOR MECHANICAL DEMOLITION PLAN - P14 & P15
Scale: 1/4" = 1'-0"

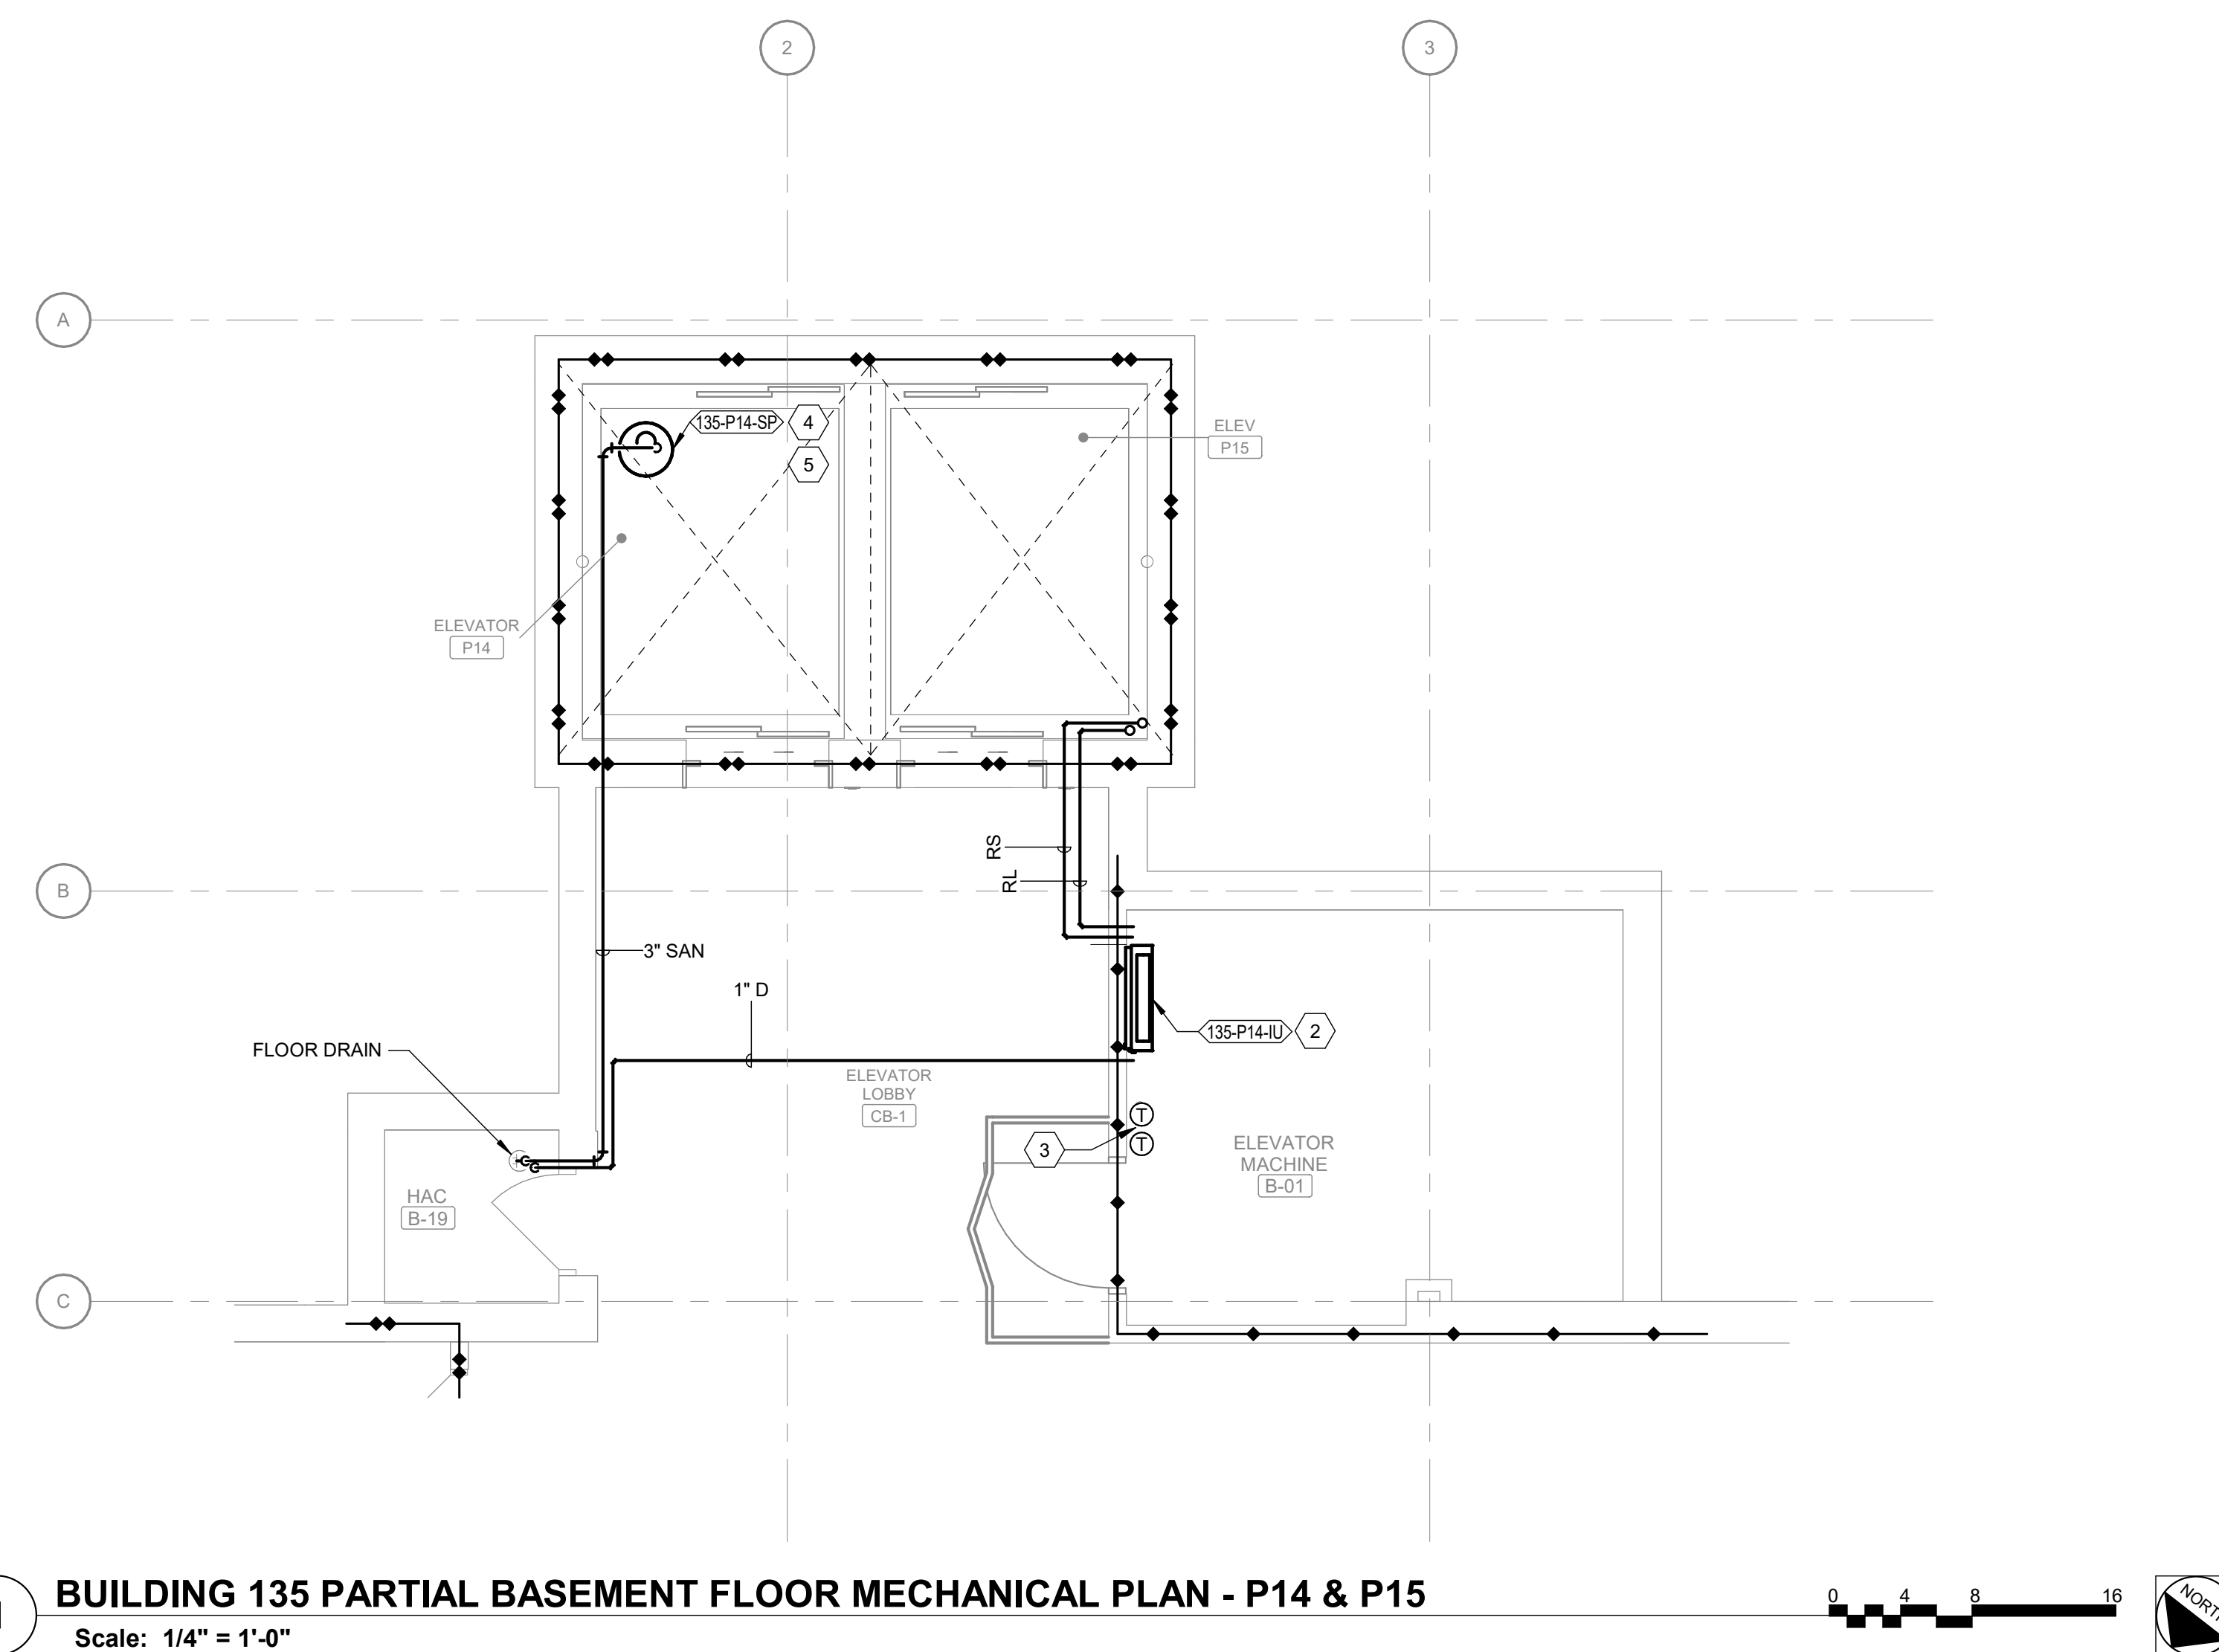

1 BUILDING 135 PARTIAL BASEMENT FLOOR MECHANICAL PLAN - P14 & P15
Scale: 1/4" = 1'-0"

SHEET NOTES:

1. REMOVE AND REPLACE ANY FIRE PROTECTION HEADS AFFECTED BY WORK.

 KEY NOTES:


- | | |
|---|---|
| 1 | DEMOLISH SIDEWALL TRANSFER GRILLE AND CAP. |
| 2 | DEMOLISH SUPPLY DUCTWORK AND AIR TERMINAL. CAP AT WALL. |

 KEY NOTES:

- 1 PROVIDE OUTDOOR SPLIT SYSTEM ON BUILDING 135 ROOF.
- 2 PROVIDE INDOOR SPLIT SYSTEM.
- 3 PROVIDE THERMOSTAT SERVING NEW SPLIT SYSTEM AND NEW DDC THERMOSTAT. MOUNT APPROX 48" AFF.
- 4 PROVIDE SUMP PUMP. ROUTE DISCHARGE TO FLOOR DRAIN.
- 5 PROVIDE 24" X 24" BY 6" DEEP SHALLOW SUMP PIT.

KEY PLAN

SCALE: NO SCALE

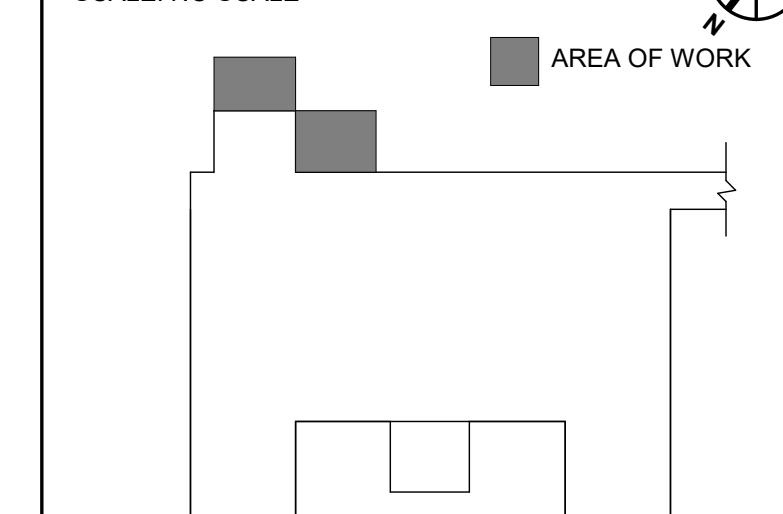


WALL RATING LEGEND


-  1 HR - FIRE SEPARATION
 2 HR - FIRE SEPARATION
 SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

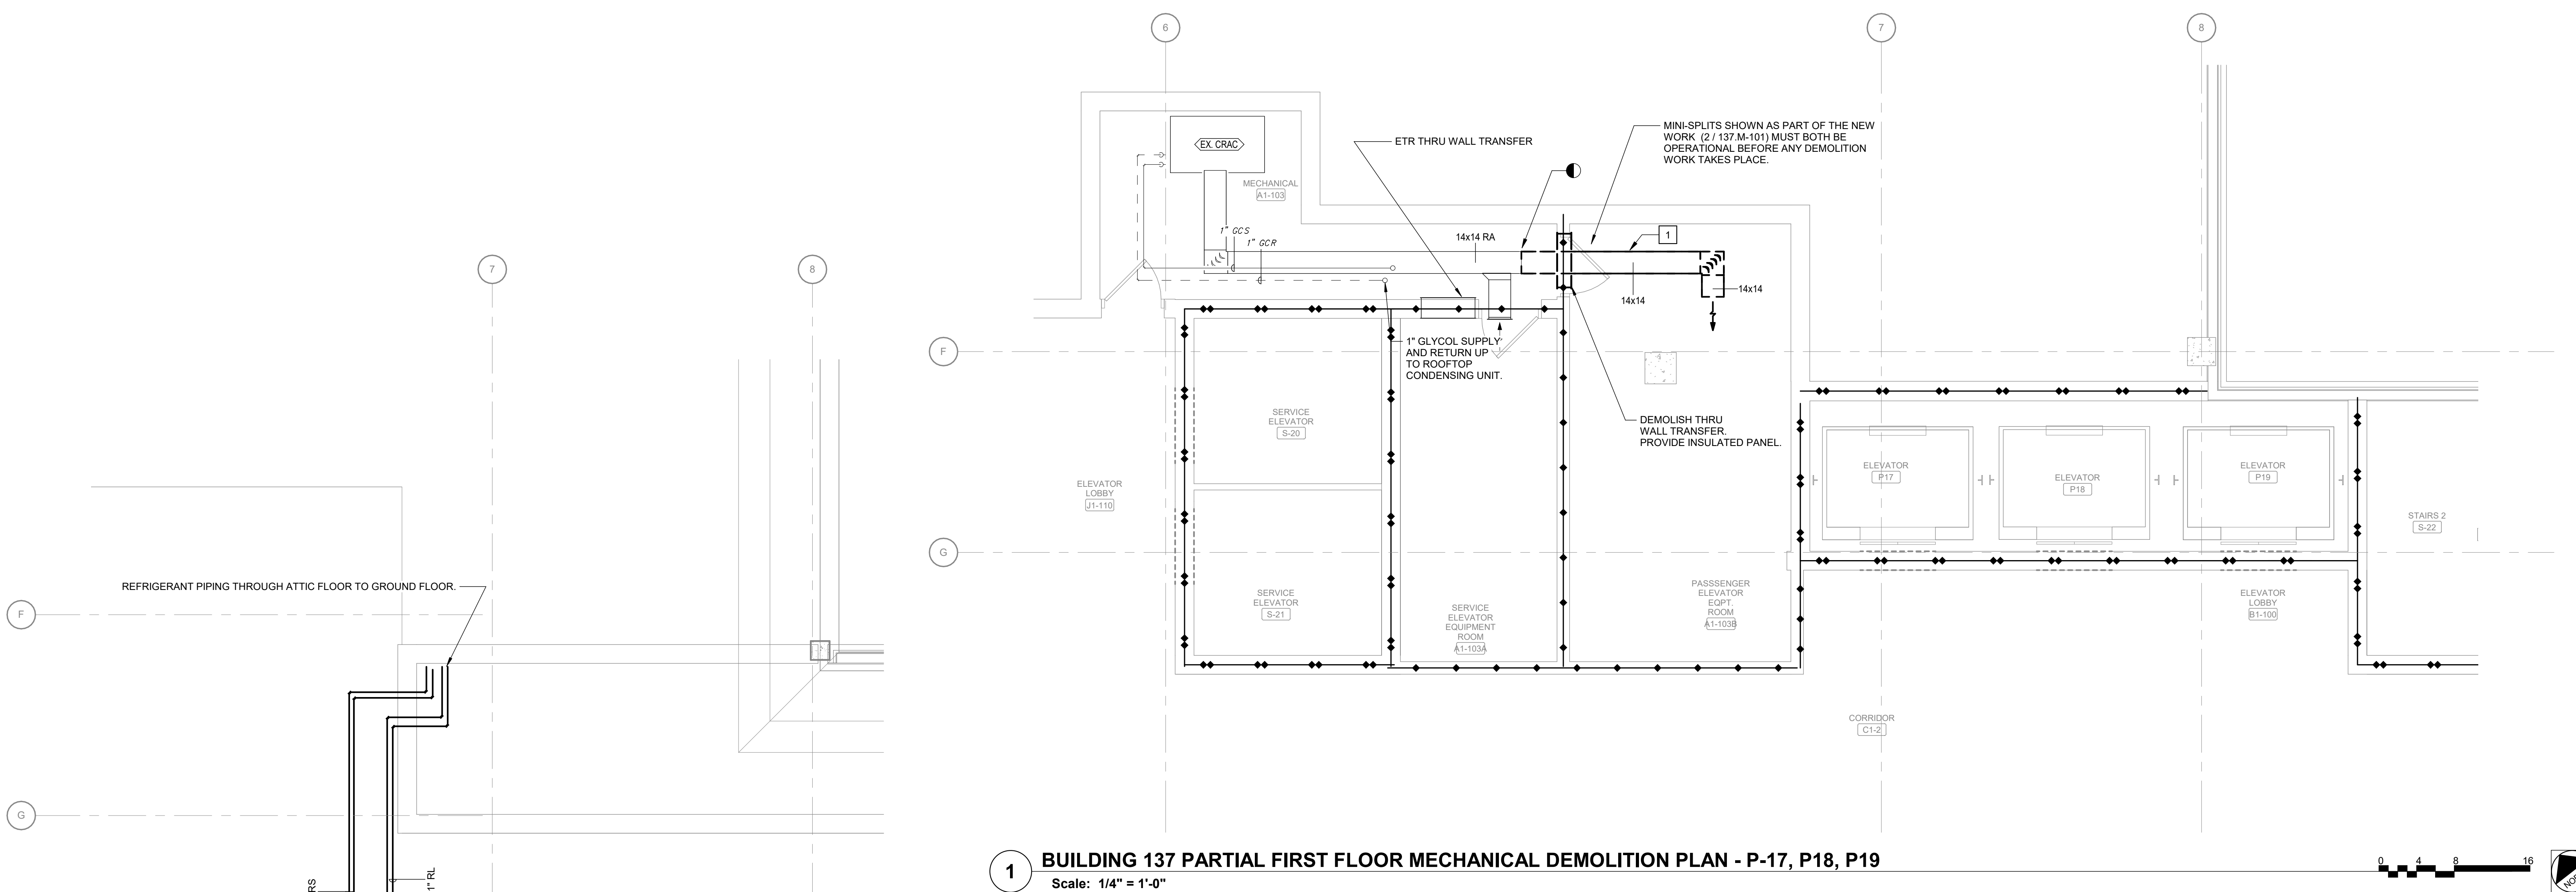

1 BUILDING 137 PARTIAL FIRST FLOOR MECHANICAL DEMOLITION PLAN - P-17, P18, P19
Scale: 1/4" = 1'-0"

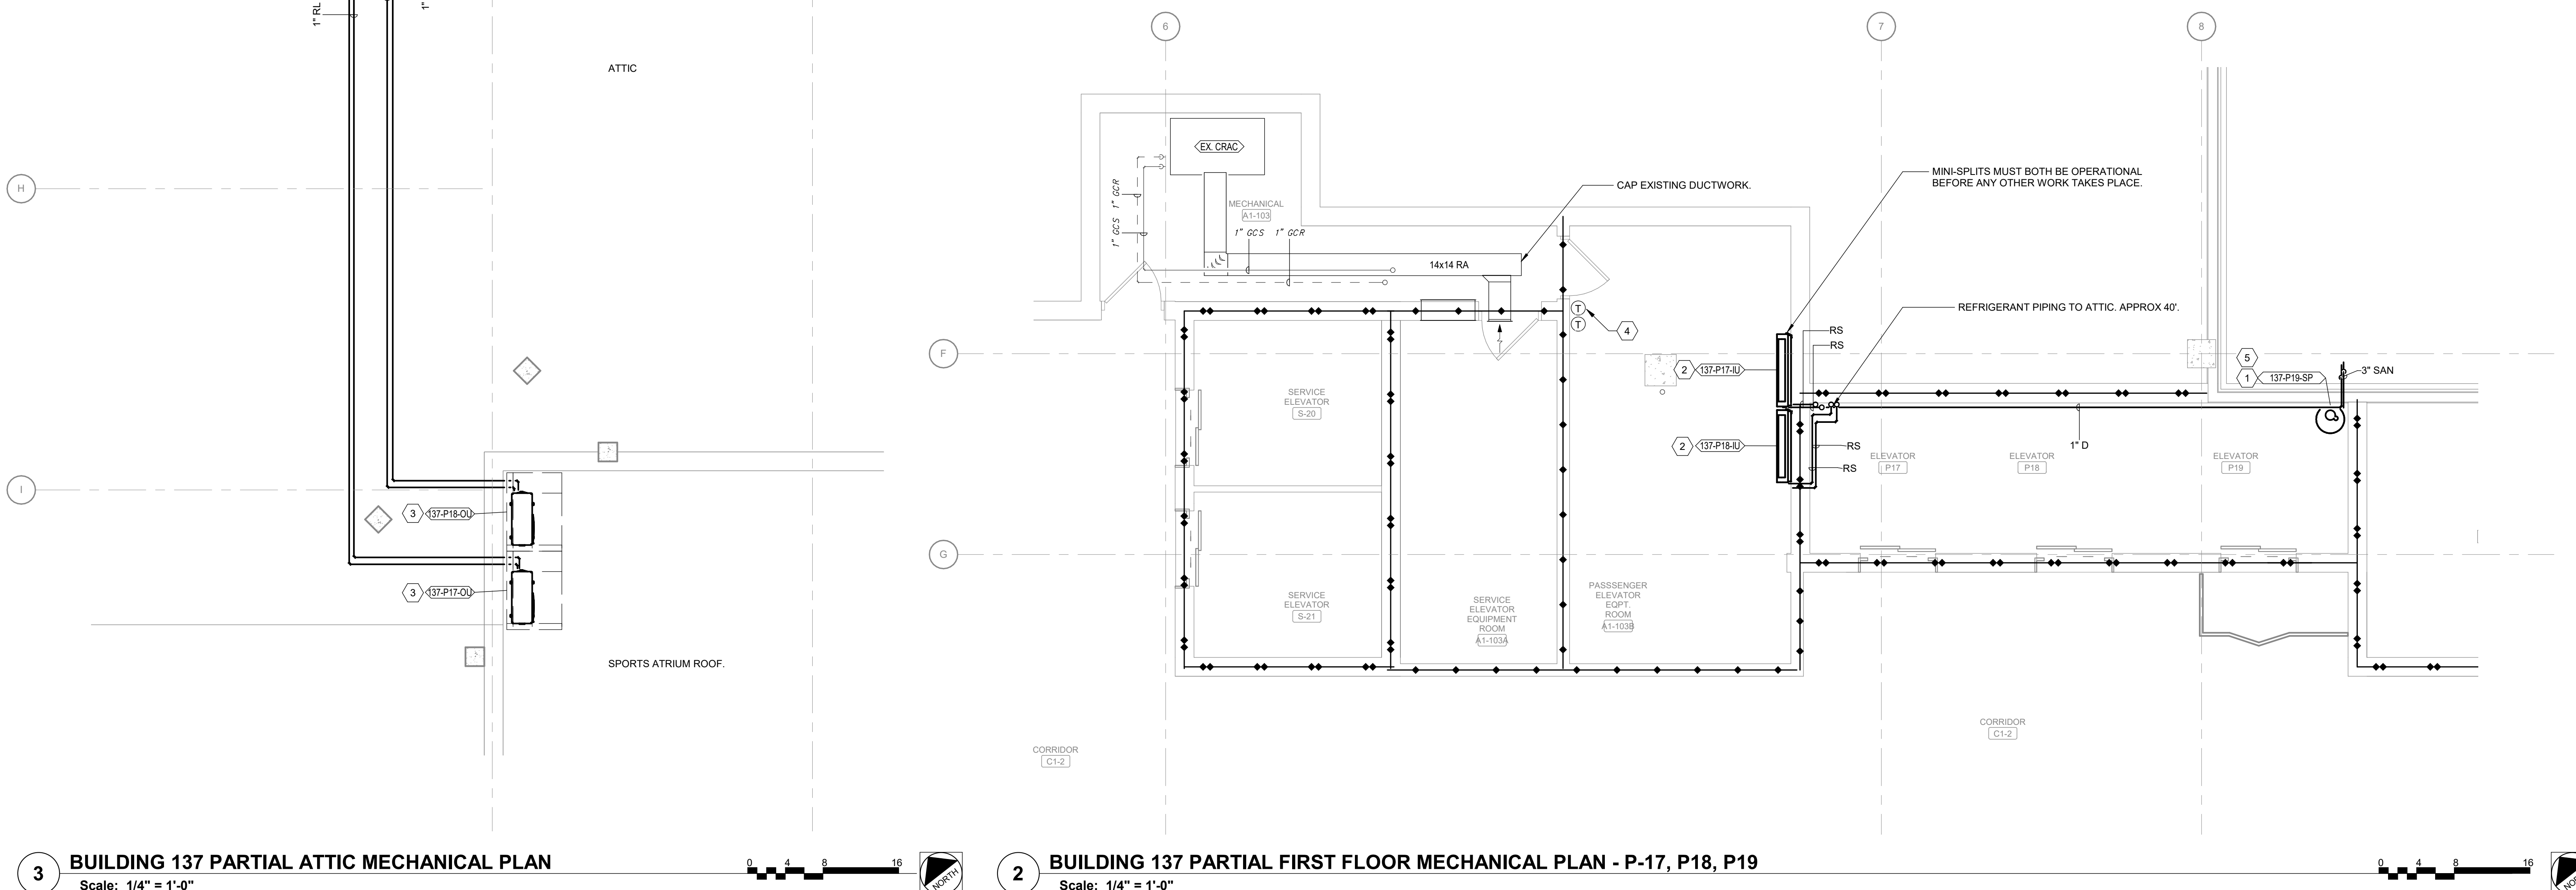

3 BUILDING 137 PARTIAL ATTIC MECHANICAL PLAN
Scale: 1/4" = 1'-0"

2 BUILDING 137 PARTIAL FIRST FLOOR MECHANICAL PLAN - P-17, P18, P19
Scale: 1/4" = 1'-0"

SHEET NOTES:

1. REMOVE AND REPLACE ANY FIRE PROTECTION HEADS AFFECTED BY WORK.

 KEY NOTES:


- 1 DEMOLISH SUPPLY DUCTWORK SERVING CRAC UNIT.

 KEY NOTES:

- 1 PROVIDE SUMP PUMP. ROUTE DISCHARGE TO EXTERIOR WITH SPLASH BLOCK AT DRAIN LOCATION. SUMP PUMP TO BE LOCATED IN EXISTING PIT.
- 2 PROVIDE WALL MOUNT SPLIT SYSTEM. HANG ON WALL AT LEAST 7' AFF.
- 3 PROVIDE SPLIT SYSTEM CONDENSING UNIT MOUNTED ON WALL 5' ABOVE ROOF. ROUTE CONDENSATE TO NEAREST ROOF DRAIN.
- 4 PROVIDE THERMOSTAT SERVING NEW SPLIT SYSTEM AND NEW DDC THERMOSTAT. MOUNT APPROX 48" AFF.
- 5 PROVIDE 24" X 24" BY 6" DEEP SHALLOW SUMP PIT.

KEY PLAN

SCALE: NO SCALE

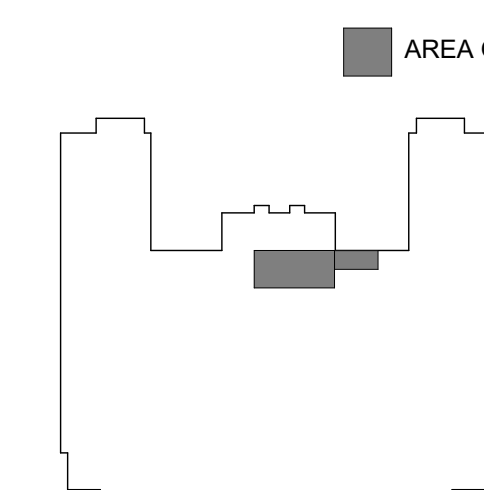


WALL RATING LEGEND


-  1 HR - FIRE SEPARATION
 2 HR - FIRE SEPARATION
 SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
00% BID DOCUMENTS


[illegible]

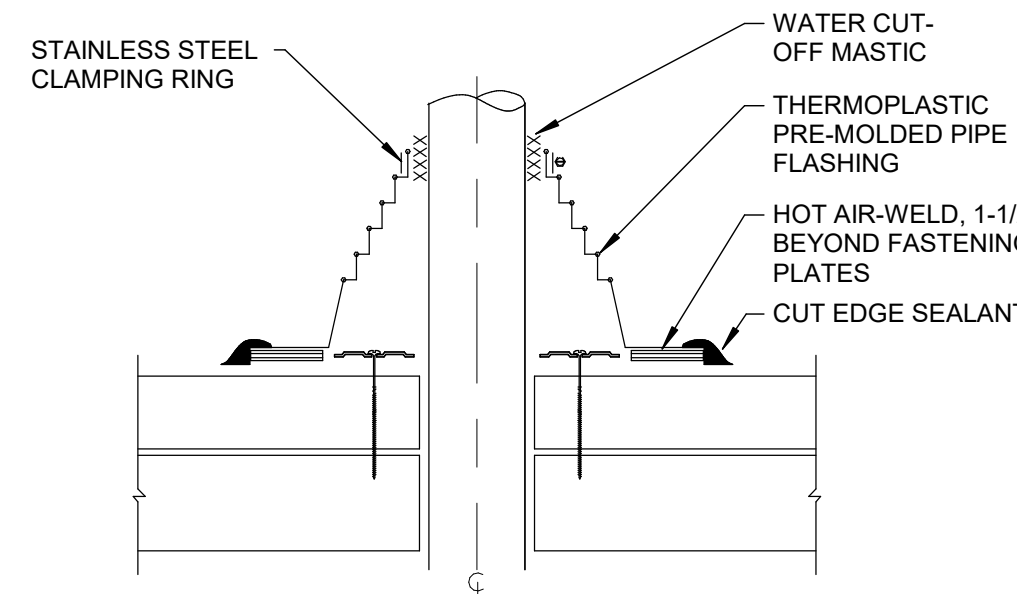


7 ROOF PIPE PENETRATION DETAIL
Scale: No Scale

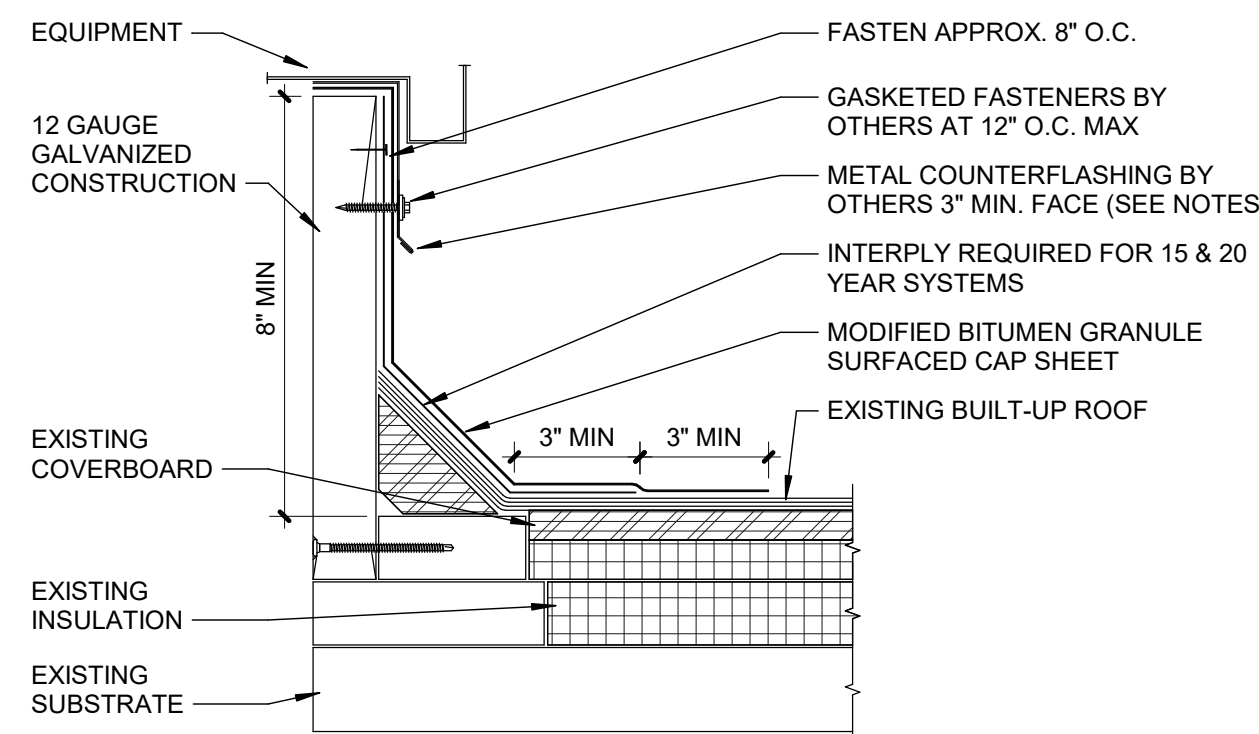


8 ROOFTOP EQUIPMENT CURB DETAIL
Scale: No Scale

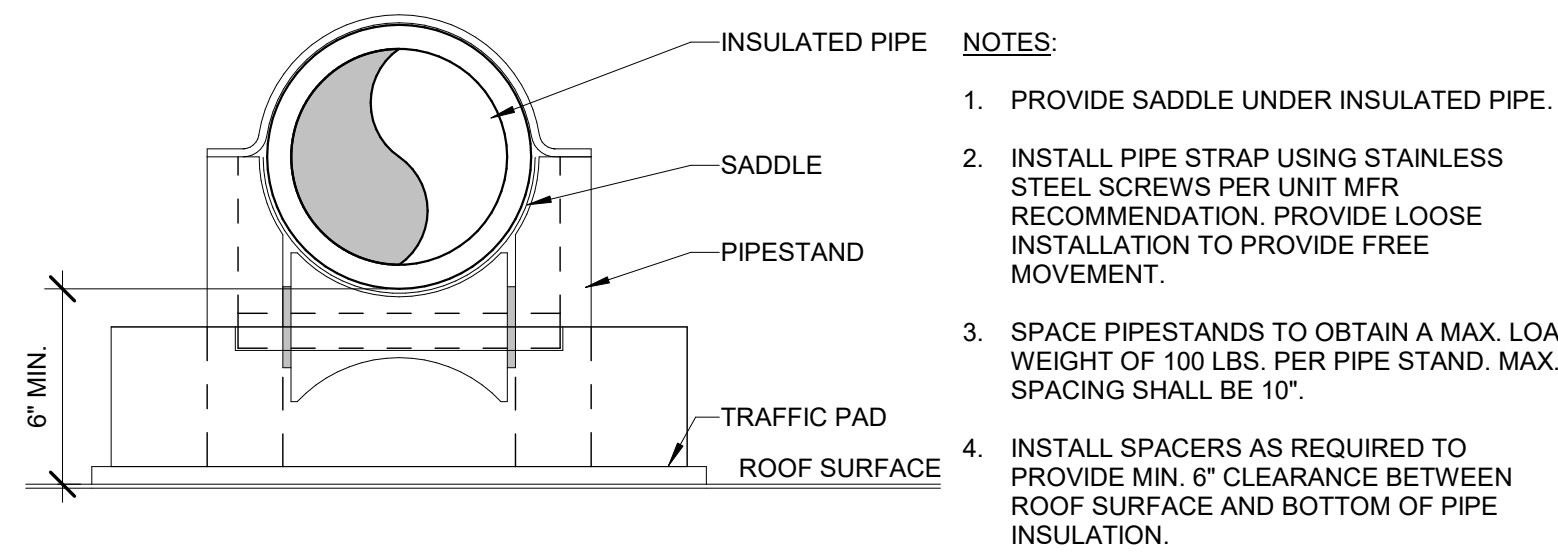


9 ROOFTOP PIPESTAND DETAIL
Scale: No Scale

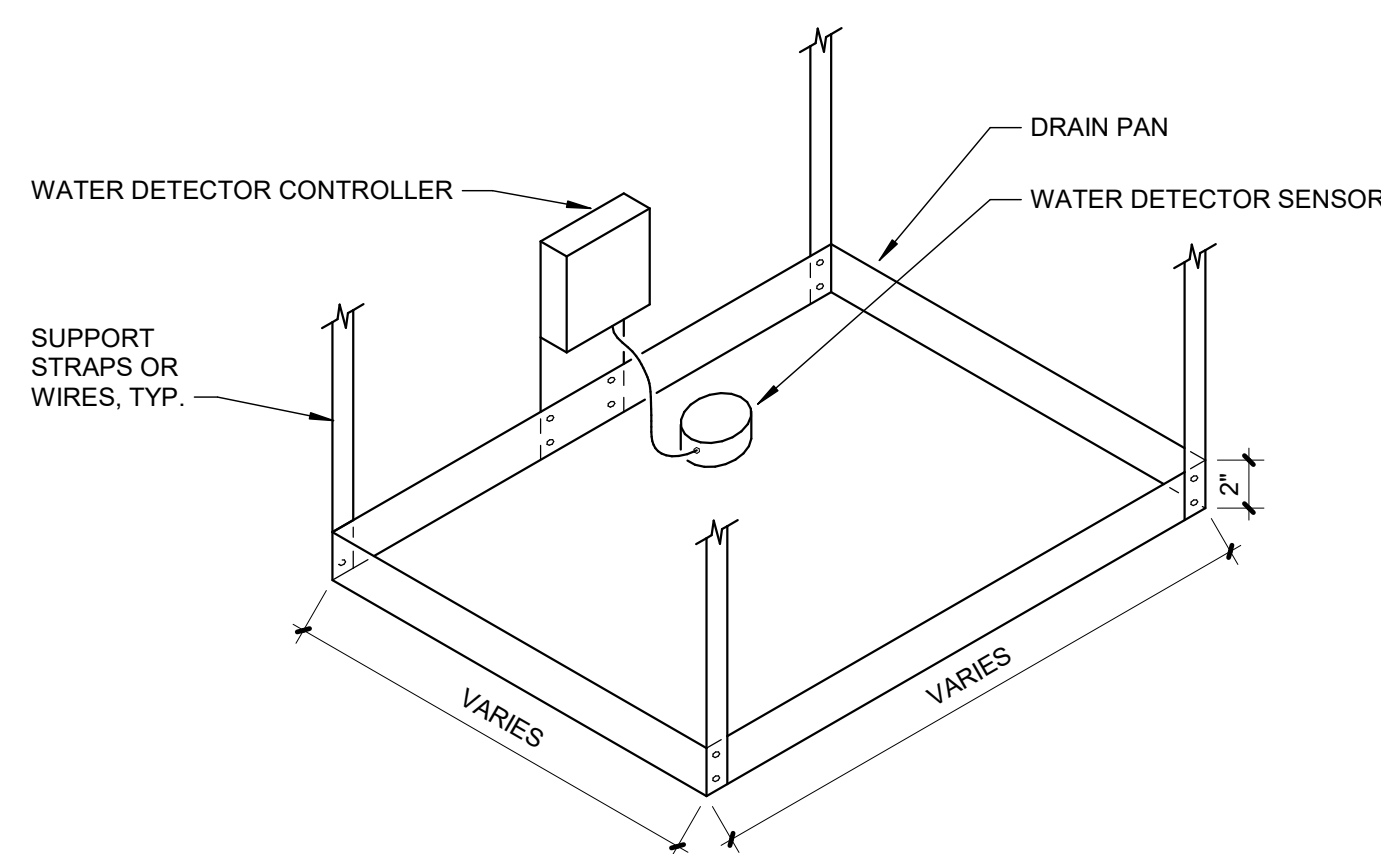


10 DRAIN PAN DETAIL
Scale: No Scale

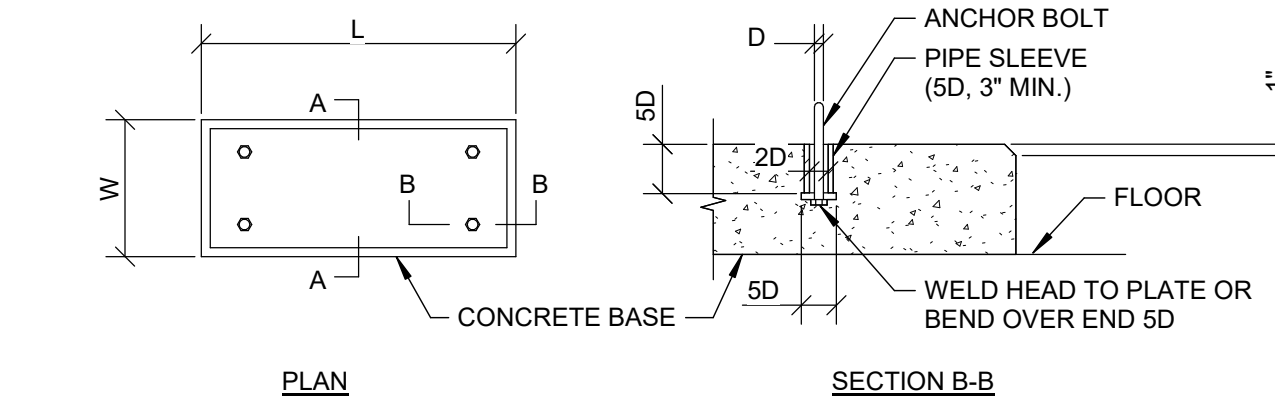


4 CONCRETE EQUIPMENT BASES DETAIL
Scale: No Scale

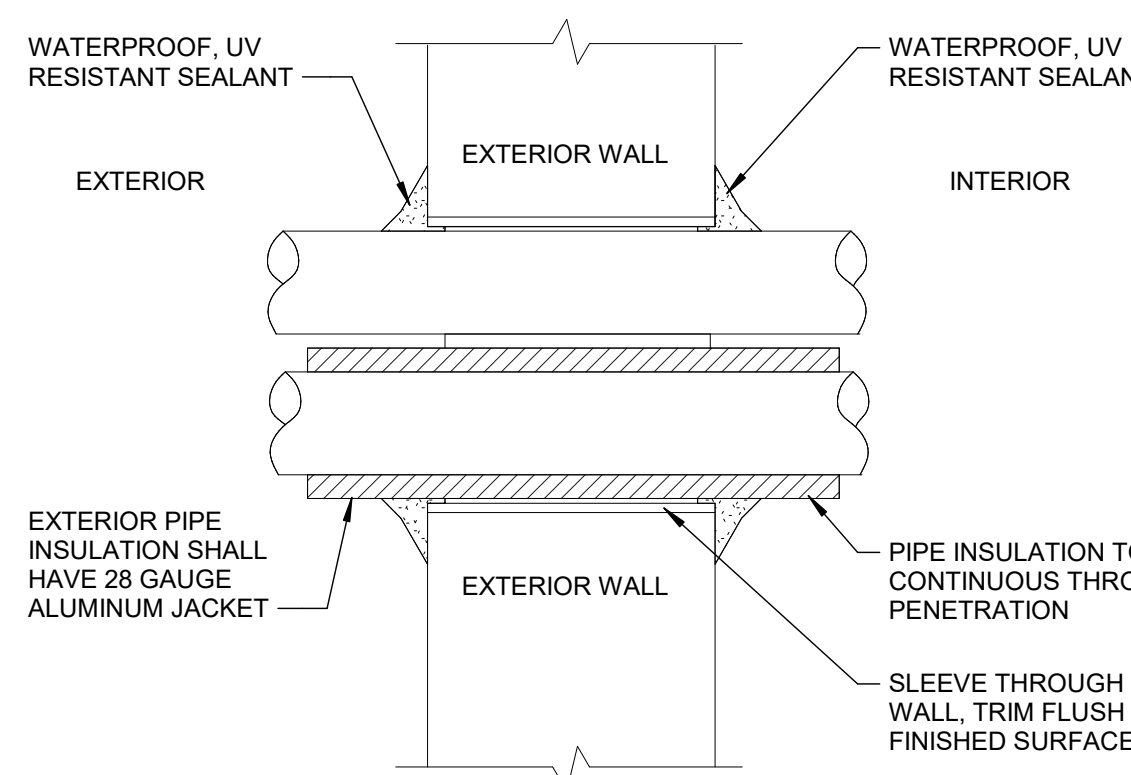


5 PIPE WALL PENETRATION
Scale: No Scale

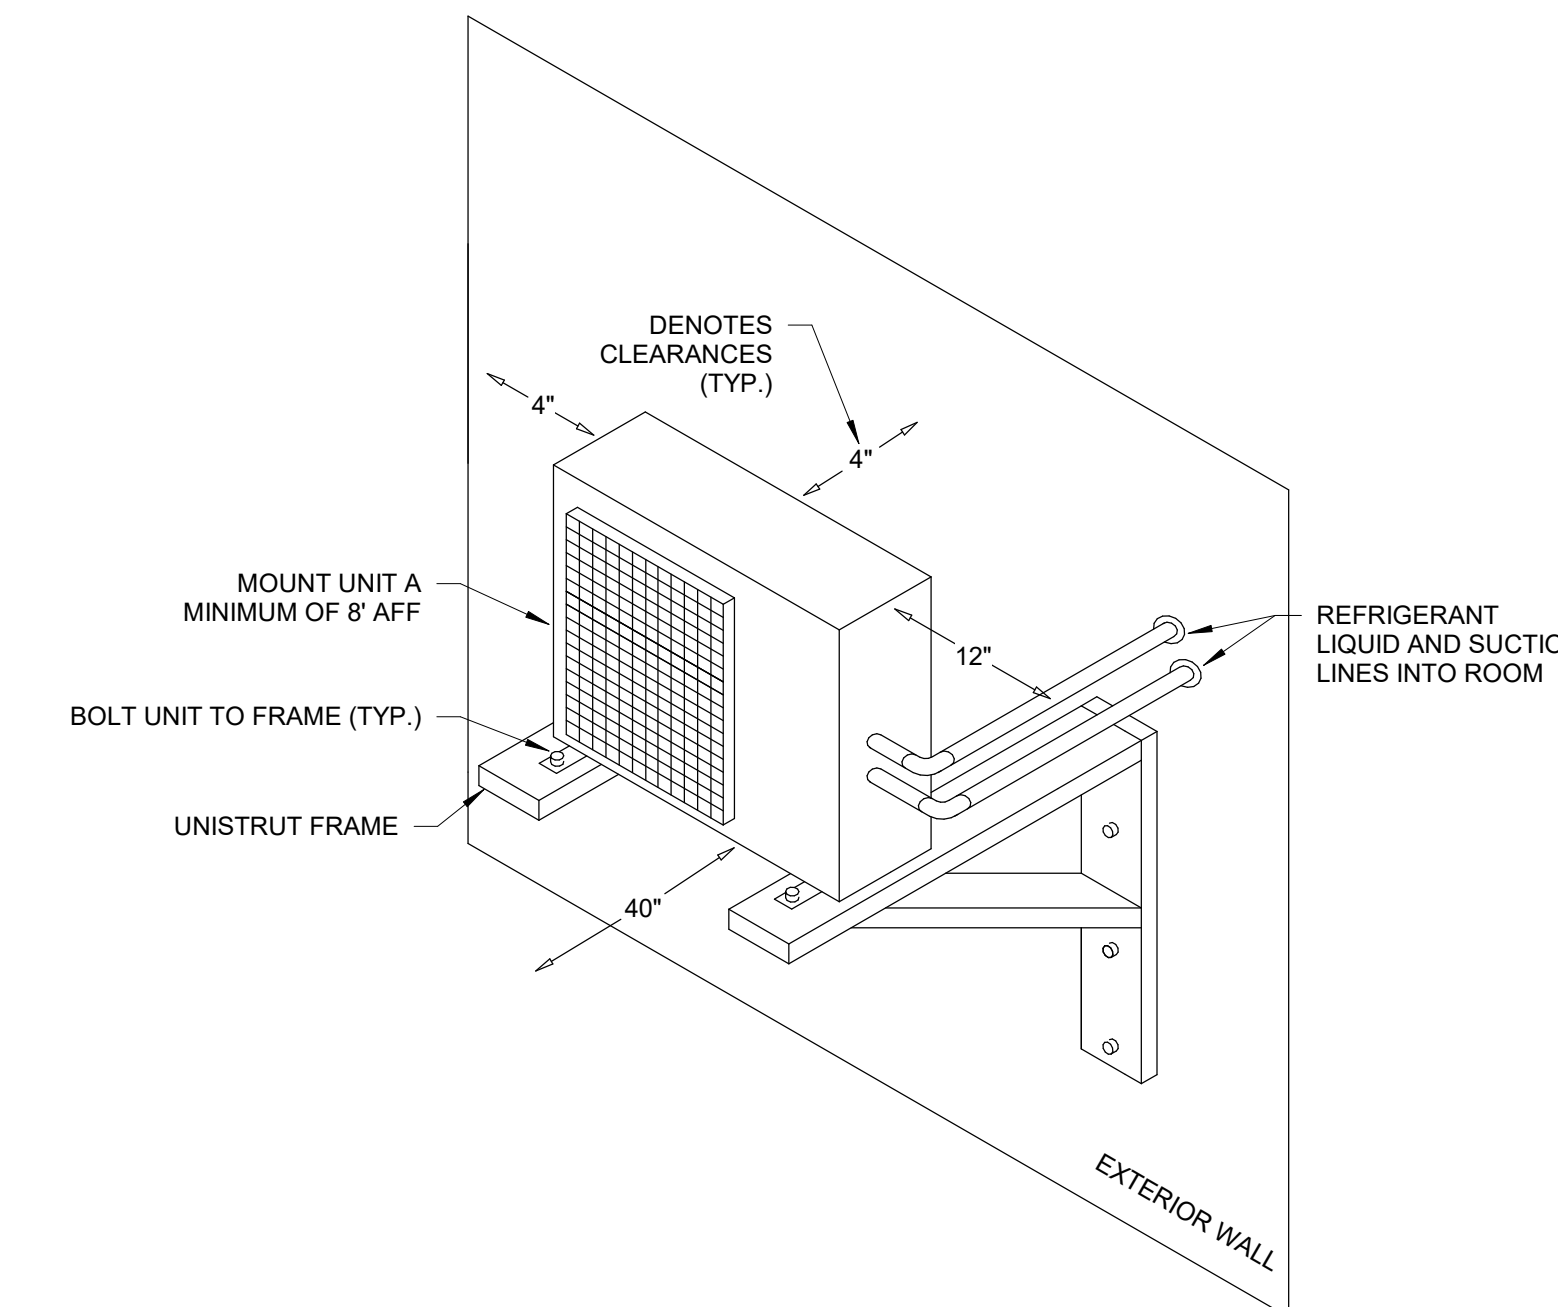


6 CONDENSING UNIT INSTALLATION DETAIL - ON WALL
Scale: No Scale

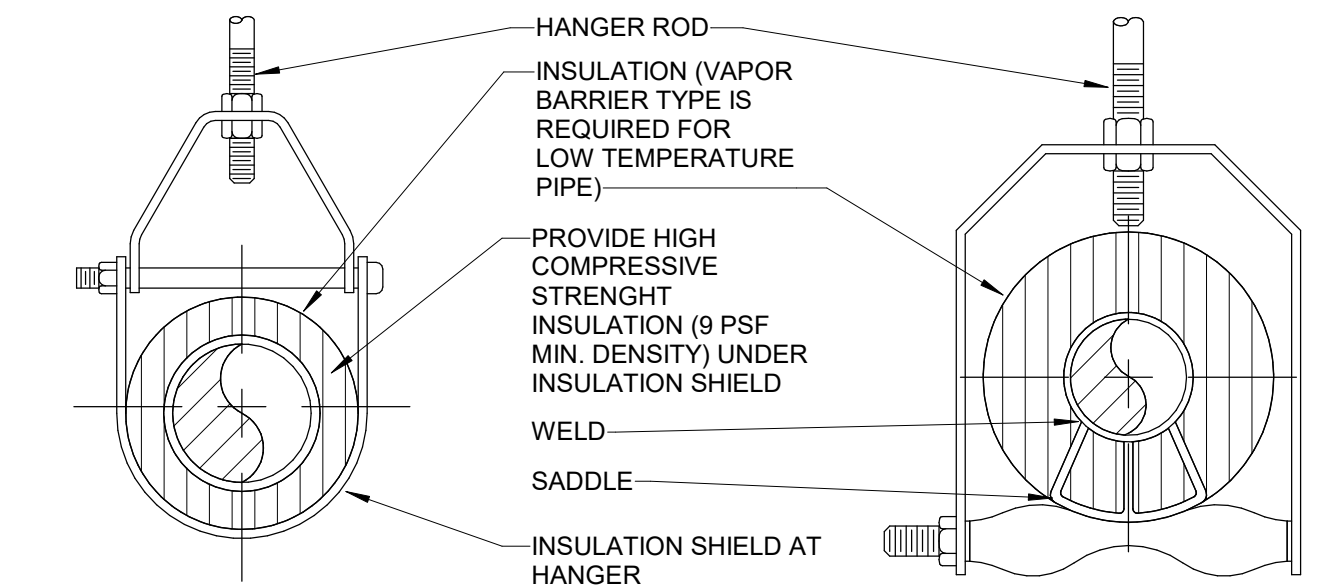

1 PIPE HANGER DETAIL
Scale: No Scale

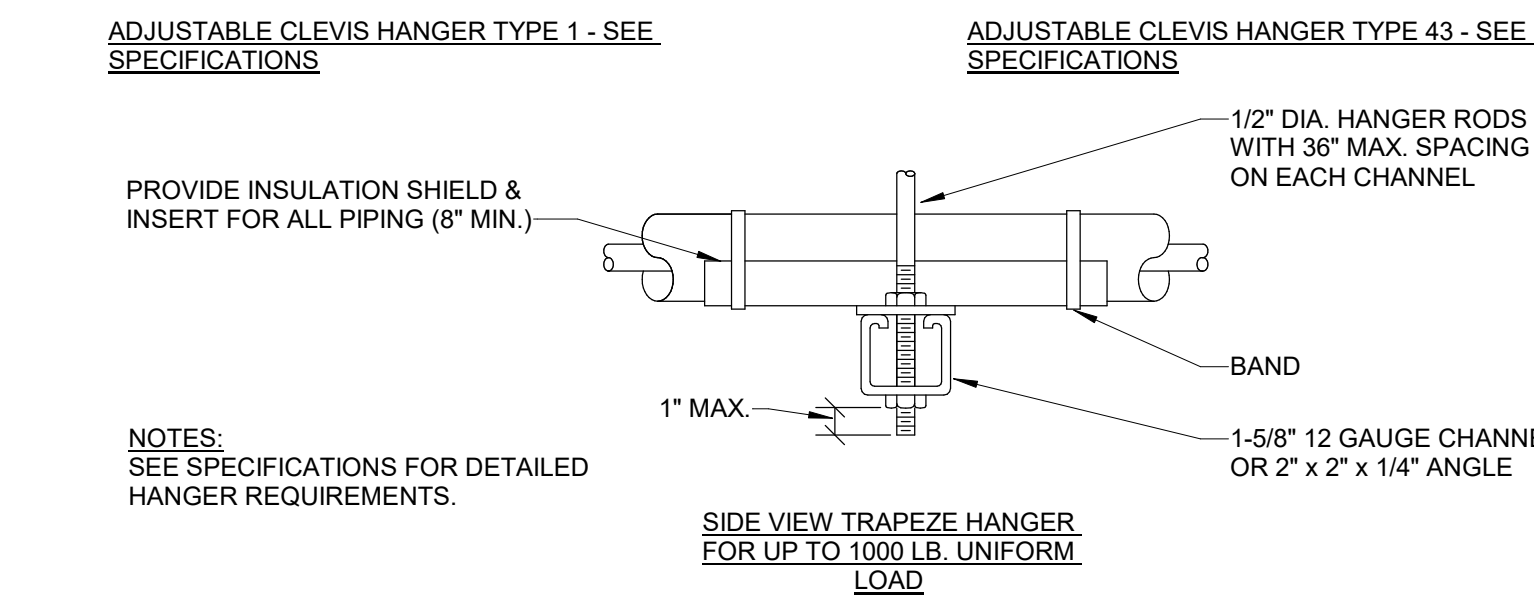

2 CONDENSING UNIT INSTALLATION DETAIL - ON ROOF CURB
Scale: No Scale

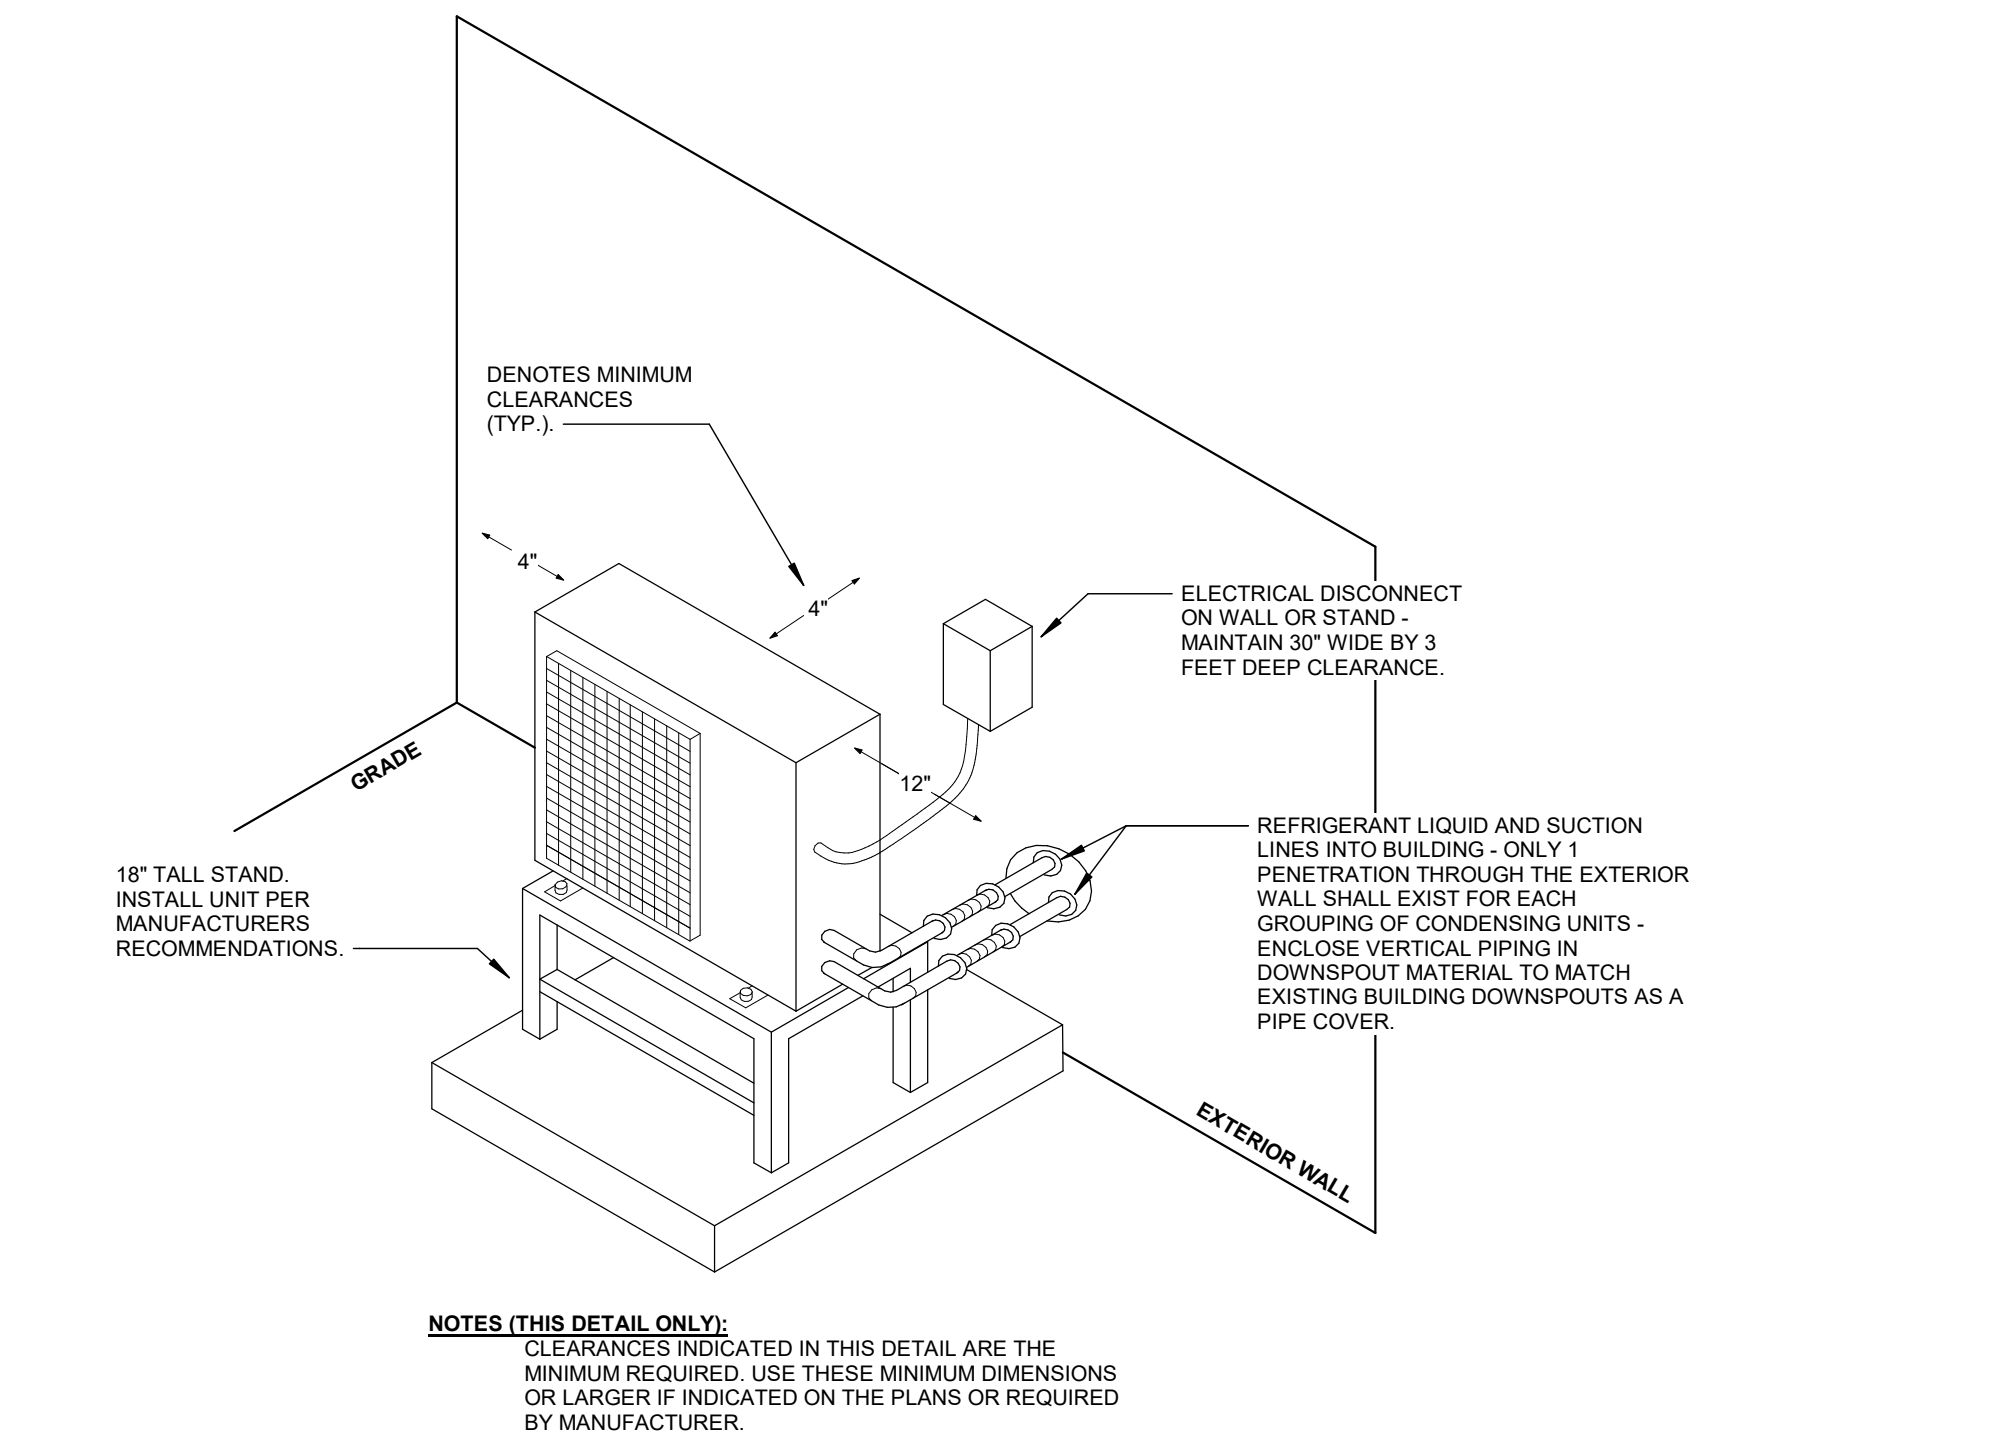

3 CONDENSING UNIT INSTALLATION DETAIL - ON GRADE
Scale: No Scale

FULLY SPRINKLERED
100% BID DOCUMENTS

CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title MECHANICAL DETAILS		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
Michael Blades & Associates, Ltd Elevator and Escalator Consulting			Headquarters: Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511		U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC, VISN 7		Approved		Building Number 1, 2, 5, 38, 135 & 137	
# Revisions: Date			SEAN WILLIAM REID Lic. No. 0402064126 PROFESSIONAL ENGINEER 2/5/2025		www.acg-pa.com 919-858-7420		Date FEBRUARY 6, 2025		Checked SWR		Drawing Number M-501	
							Drawn AV				Dwg 9 of 10	








Dwg 10 of 10








C:\Users\jmschwandt\Documents\E_21-344-VA_Tuscaloosa-Upgrade\Elevators-AL_Building_1_Administrative_jmschwandt.docx






2/4/2025 3:15:25 PM
VA FORM 08-6231

ELECTRICAL ABBREVIATIONS LIST									
1P	1 POLE (2P, 3P, 4P, ETC.)	CONST	CONSTRUCTION	GAL	GALLON	MTR	MOTOR, MOTORIZED	SPKR	SPEAKER
1PH	1 PHASE	CONT	CONTINUATION OR CONTINUOUS	GALV	GALVANIZED	MTS	MANUAL TRANSFER SWITCH	SP	SPIRE
2/C	TWO-CONDUCTOR (3/C, 4/C, ETC.)	CONTR	CONTRACTOR	GC	GENERAL CONTRACTOR	NA	NOT APPLICABLE	SR	SURFACE RACEWAY
ZW	TWO-WIRE (3W, 4W, ETC.)	COORD	COORDINATE	GEN	GENERATOR	NC	NORMALLY CLOSED	SS	STAINLESS STEEL
3PH	3 PHASE	COR	CONTRACTING OFFICER'S	GND	GROUND	NEC	NATIONAL ELECTRICAL CODE	SSW	SELECTOR SWITCH
A	AMPERE	CT	CONTROL POWER TRANSFORMER	GND	GROUND	NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION	STD	STANDARD
AAP	ALARM ANNUNCIATOR PANEL	CTV	CABLE TELEVISION	GRS	GALVANIZED RIGID STEEL (CONDUIT)	NFDS	NON-FUSED SAFETY DISCONNECT SWITCH	SURF	SURFACE MOUNTED
AC	AIR CONDITIONER	CTR	CENTER	GYB BD	GYPSUM BOARD	NIC	NOT IN CONTRACT	SW	SWITCH
ACC	ALTERNATING CURRENT	CU	COPPER	HID	HIGH-INTENSITY DISCHARGE	NL	NIGHT LIGHT	SWBD	SWITCHBOARD
ADG	AUTOMATIC DOOR OPENER	CU FT	CUBIC FEET	HQA	HAND-OFF-AUTOMATIC	NO	NORMALLY OPEN	SYM	SYMMETRICAL
A/E	ARCHITECT/ENGINEER	D	DEMOLITION	HP	HORSEPOWER	NTS	NOT TO SCALE	SY	SYSTEM
AF	AMP FRAME	DB	DIRECT BURIAL	HT	HEIGHT	ON	ON CENTER	TC	TIMECLOCK
AFC	AVAILABLE FAULT CURRENT (KILOAMPS)	DC	DIRECT CURRENT	HTR	HEATER	OD	OUTSIDE DIAMETER	TEL	TELEPHONE
AFF	ABOVE FINISHED FLOOR	DEG C	DEGREES CELSIUS	HV	HIGH VOLTAGE	OH	OVERHEAD	TEL/ATA	TELEPHONE/ATA
AFG	ABOVE FINISHED GRADE	DEG F	DEGREES FAHRENHEIT	HVC	HEATING, VENTILATING AND AIR CONDITIONING	OL	OVERLOAD	TERM	TERMINAL
AFI	ARC FAULT CIRCUIT INTERRUPTER	DEMO	DEMOLITION	IES	ILLUMINATION ENGINEERING SOCIETY	PA	PUBLIC ADDRESS	TP	TWISTED PAIR
AHJ	AUTHORITY HAVING JURISDICTION	DEPT	DEPARTMENT	IG	ISOLATED GROUND	PB	PULL BOX OR PUSHBUTTON	TPS	TWISTED PAIR SHIELDED
AHU	AIR HANDLING UNIT	DIA	DIAMETER	IMC	INTERMEDIATE METAL CONDUIT	PBPU	PREFABRICATED BEDSIDE PATIENT UNIT	TR	TAMPER RESISTANT
AIC	AMPERE INTERRUPTING CAPACITY	DISC	DISCONNECT	IR	INFRARED	PCB	POLYCHLORINATED BIPHENYL	TSTAT	THERMOSTAT
AL	ALUMINUM	DIST	DISTRIBUTION	IW	INTERLOCK WITH	PC	PHOTOELECTRIC CELL	TTB	TELEPHONE TERMINAL BOARD
ALT	ALTERNATE	DOWN	DOWN	IWH	INSTANTANEOUS WATER HEATER	PF	POWER FACTOR	TTC	TELEPHONE TERMINAL CABINET
AMP	AMPERE	DS	SAFETY DISCONNECT SWITCH	J-BOX	JUNCTION BOX	PH	PHASE	TYP	TYPICAL
APPROX	APPROXIMATELY	DWG	DRAWING	KV	KILOVOLT	PIR	PIR	UC	UNDER COUNTER
ARCH	ARCHITECT, ARCHITECTURAL	EC	ELECTRICAL CONTRACTOR	KVA	KILOVOLT-AMPERE	PED	PEDESTAL	UE	UNDERGROUND ELECTRICAL
ATS	AUTOMATIC TRANSFER SWITCH	EG	EQUIPMENT GROUND	KVAR	KILOVOLT-AMPERE REACTIVE	PEND	PENDANT	UG	UNDERGROUND
AUTO	AUTOMATIC	ELEC	ELECTRIC, ELECTRICAL	KW	KILOWATT	PF	POWER FACTOR	UH	UNIT HEATER
AUX	AUXILIARY	ELEV	ELEVATOR	KWH	KILOWATT HOUR	PH	POST INDICATING VALVE	UL	UNDERWRITER'S LABORATORY
AV	AUDIO VISUAL	EMERGENCY	EMERGENCY	LED	LIGHT-EMITTING DIODE	PV	PANEL	UT	UNDERGROUND TELEPHONE
AWG	AMERICAN WIRE GAUGE	EMI	ELECTROMAGNETIC INTERFERENCE	LF	LINEAR FEET/FOOT	POE	POWER-OVER-ETHERNET	UTP	UNSHIELDED TWISTED PAIR
BAS	BUILDING AUTOMATION SYSTEM	EMS	ENERGY MANAGEMENT SYSTEM	LM	LUMEN	PR	PAIR	UTIL	UTILITY
BATT	BATTERY	EMT	ELECTRICAL METALLIC TUBING	LRA	LOCKED ROTOR AMPS	PR	PRIMARY	UV	UNIT VENTILATOR OR ULTRAVIOLET
BC	BARE COPPER	EPO	EMERGENCY POWER OFF	LTG	LIGHTING	PROJ	PROJECTION	V	VOLT
BD	BOARD	EQUIP	EQUIPMENT	LTNG	LIGHTNING	PRV	POWER ROOF VENTILATOR	VA	VOLT-AMPERES
BFF	BELOW FINISHED FLOOR	ESEM	EQUIPMENT	LV	LOW VOLTAGE	PVC	POLYVINYL CHLORIDE (CONDUIT)	VERT	VERTICAL
BLDG	BUILDING	ETR	EXISTING TO REMAIN	MATV	MASTER ANTENNA TELEVISION SYSTEM	PWR	POWER	VFD	VARIABLE FREQUENCY DRIVE
BMS	BUILDING MANAGEMENT SYSTEM	EW	ELECTRIC WATER COOLER	MAX	MAXIMUM	QTY	QUANTITY	VOL	VOLUME
BYP	BYPASS	EX	EXISTING	MC	MECHANICAL CONTRACTOR	R	RELOCATED/RELOCATED	W	WATT
C	CONDUIT	EXP	EXPLOSION PROOF	MCA	MINIMUM CIRCUIT AMPACITY	RC	RECEIPT	W	WITH
CAB	CABINET	FA	FIRE ALARM	MCB	MAIN CIRCUIT BREAKER	RCPT	RECEPTACLE	WH	WATER HEATER
CALC	CALCULATED	FACP	FIRE ALARM CONTROL PANEL	MCC	MOTOR CONTROL CENTER	REQD	REQUIRED	W/O	WITHOUT
CAP	CAPACITY	FC	FOOTCANDLE	MCP	MECHANICAL CONTRACTOR	RGS	RIGID GALVANIZED STEEL	WP	WEATHERPROOF
CAT	CATALOG, CATEGORY	FCL	FAN COIL UNIT	MFR	MANUFACTURER	RM	ROOM	XFMR	TRANSFORMER
CATV	COMMUNITY ANTENNA TELEVISION	FLR	FLOOR	MFS	MAIN FUSED DISCONNECT SWITCH	RTU	ROOF TOP UNIT	XFR	TRANSFER
CB	CIRCUIT BREAKER	FU	FUSE	MH	MANHOLE	SC	SURFACE CONDUIT	∠	ANGLE
CCR	CONTROL CONTRACTOR	FUS	FUSED SAFETY DISCONNECT	MIC	MICROPHONE	SEC	SECONDARY	@	AT
CCT	CORRELATED COLOR TEMPERATURE	FVRS	FULL VOLTAGE REVERSING	MIN	MINIMUM	SF	SQUARE FEET/FOOT	Δ	DELTA
CCTV	CLOSED CIRCUIT TELEVISION	FVNR	FULL VOLTAGE NON-REVERSING	MISC	MISCELLANEOUS	SHT	SHEET	*	INCHES
cd	CANDELA	MT	MOUNT	MLO	MAIN LUGS ONLY	SI	INTERNATIONAL SYSTEM OF UNITS	#	NUMBER
CD	CONSTRUCTION DOCUMENTS			MOA	MULTI-OUTLET ASSEMBLY	SN	SOLID NEUTRAL	φ	CENTER LINE
CF	CONTRACTOR-FURNISHED			MSBD	MAIN SWITCHBOARD	SPEC	SPECIFICATION	⊕	PLATE
CKT	CIRCUIT			MT					
CLG	CEILING								
COAX	COAXIAL CABLE								
COMM	COMMUNICATION								
CONN	CONNECTION								

ELECTRICAL GENERAL NOTES	
1.	ALL ELECTRICAL DEVICES, FIXTURES, EQUIPMENT AND FEEDERS SHALL BE INSTALLED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS, THE MANUFACTURER'S RECOMMENDED PROCEDURES, ALL APPLICABLE LOCAL AND STATE CODES, AMERICANS WITH DISABILITIES ACT AND WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE AND VA STANDARDS.
2.	PROVIDE ADDITIONAL SUPPORT FOR DEVICES, FIXTURES, EQUIPMENT AND FEEDERS WHERE THE BUILDING CONSTRUCTION IS NOT SUITABLE FOR DIRECT MOUNTING.
3.	FIRESTOP, DRAFTSTOP, SMOKESTOP AND/OR PROTECT THE ANNULAR SPACE AROUND ALL PENETRATIONS THROUGH WALLS, PARTITIONS, FLOORS, CEILING, AND ROOFS IN ACCORDANCE WITH THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE, UL LISTING REQUIREMENT AND THE APPLICABLE BUILDING CODES.
4.	VERIFY CEILING SYSTEMS AND PROVIDE MOUNTING ACCESSORIES, TRIMS AND ALL REQUIRED MOUNTING HARDWARE TO SUIT THE PARTICULAR INSTALLATION.
5.	PROTECT EXISTING UNDERGROUND AND BUILDING INTERIOR UTILITIES DURING CONSTRUCTION.
6.	BRANCH CIRCUIT CONDUCTORS SHALL BE 12 AWG COPPER MINIMUM.
7.	COORDINATE ANY AND ALL WORK WITH ALL OTHER TRADES PRIOR TO INSTALLATION SO AS TO AVOID CONFLICT DURING CONSTRUCTION.
8.	ALL PANELS SHALL HAVE TYPED, COMPLETED DIRECTORIES INDICATING EQUIPMENT SERVED AND ROOM NUMBER (AS INDICATED ON FINAL BUILDING ROOM SIGNAGE) OF EQUIPMENT LOCATION, OR SPARE, OR SPACE.
9.	MANUFACTURER'S NAME AND MODEL NUMBER ARE GIVEN FOR DESCRIPTIVE PURPOSES, TO INDICATE A QUALITY STANDARD, AND ARE NOT INTENDED TO LIMIT PRODUCTS TO A PARTICULAR MANUFACTURER. PRODUCTS DEEMED EQUAL AND APPROVED BY THE DESIGNER WILL BE ACCEPTED. ALL PRODUCTS MUST COMPLY WITH 'BUY AMERICAN ACT'.
10.	ALL FEEDERS AND CIRCUITRY SHALL BE TORQUED PER THE PANEL, BREAKER, AND/OR PARTICULAR EQUIPMENT MANUFACTURER'S SPECIFICATIONS.
11.	CIRCUITRY TO SWITCHES, RECEPTACLES, AND ALL OTHER DEVICES SHALL BE TERMINATED ON THE DEVICE'S SCREW TERMINALS.
12.	MOUNTING HEIGHTS INDICATED ARE TO CENTER OF DEVICE, OUTLET, FIXTURE, OR EQUIPMENT UNLESS NOTED OTHERWISE.
13.	ALL WIRE TERMINATIONS SHALL BE RATED FOR 75 DEGREES C.
14.	ALL CONDUCTORS SHALL HAVE THHN/THWN INSULATION, UNLESS OTHERWISE NOTED.
15.	ALL CONDUIT SHALL BE RGS OR EMT UNLESS OTHERWISE NOTED. FMC CONDUIT SHALL BE USED ON VIBRATING EQUIPMENT (MAXIMUM LENGTH OF 6 FEET). PVC SHALL BE USED FOR UNDERGROUND CONDUIT OR WHERE CONCRETE-ENCASED, WHERE VIBRATING EQUIPMENT IS LOCATED OUTSIDE. LFMC CONDUIT SHALL BE USED (MAXIMUM SIX FEET) FOR FINAL CONNECTIONS.
16.	ALL ELECTRICAL MATERIALS, DEVICES, APPLIANCES AND EQUIPMENT SHALL BE LABEL LISTED BY AN APPROVED THIRD PARTY TESTING AGENCY.
17.	FOR ALL LED FIXTURES, THE FIXTURE MUST BE CAPABLE OF SELF-RESETTING TO THE SWITCHED/CONTROLLED STATE DURING ANY FLUCTUATION IN POWER SUPPLY WHERE AUTOMATIC PROTECTIVE MEASURES DISABLE THE LED LAMPS. PROVIDE A LETTER OR STATEMENT FROM THE MANUFACTURER, OR OTHER ACCEPTABLE PROOF, THAT ALL LED FIXTURES, WITH OR WITHOUT BROWNOUT PROTECTION, WILL RETURN TO THE SWITCHED/CONTROLLED STATE AUTOMATICALLY. PROVIDE STATEMENT WITH THE FIXTURE SUBMITTALS.
18.	IN CASE OF CONFLICTS OR DISCREPANCIES WITHIN OR AMONG THE CONTRACT DRAWINGS, THE BETTER QUALITY, MORE STRINGENT REQUIREMENTS OR GREATER QUANTITY OF WORK, AS DETERMINED BY THE GOVERNMENT, SHALL BE PROVIDED.
19.	COMPRESSION COUPLINGS SHALL BE USED. NO SET SCREW FITTINGS ARE ALLOWED.
20.	MINIMUM CONDUIT SIZE TO BE USED IS 3/4".
21.	FEEDER TAGS APPENDED WITH 'VD' ARE UPSIZED IN AMPACITY DUE TO VOLTAGE DROP.
22.	IN PATIENT CARE BUILDINGS, ALL RECEPTACLES SHALL BE UL LISTED AS HOSPITAL GRADE, IN THE SIZE, TYPE AND CONFIGURATION REQUIRED BY CODES, PROJECT SCOPE AND REQUIREMENTS.

ELECTRICAL SYMBOL NOTES	
	THE LIGHTING FIXTURE TYPE IS INDICATED BY AN UPPER CASE LETTER OR AN UPPER CASE LETTER AND NUMBER. THE SWITCH DESIGNATION (IF NEEDED) IS INDICATED BY A LOWER CASE LETTER.
EXAMPLE: LIGHTING FIXTURE TYPE 'A1' IS CONTROLLED BY SWITCH 'b'.	
EXIT SIGNS: STEM INDICATES WALL MOUNTING. NO STEM INDICATES CEILING MOUNTING. SHADED AREA INDICATES ILLUMINATED FACE(S). ARROW INDICATES DIRECTIONAL ARROW ON ILLUMINATED FACE(S).	
	EXAMPLE 1: WALL MOUNTED EXIT SIGN TYPE 'E1' WITH SINGLE FACE AND DIRECTIONAL ARROW.
	EXAMPLE 2: CEILING MOUNTED EXIT SIGN TYPE 'E2' WITH DOUBLE FACE AND DIRECTIONAL ARROWS.
	DEVICES: THE SWITCH DESIGNATION IS INDICATED BY A LOWER CASE LETTER. EXAMPLE: SPLIT DUPLEX RECEPTACLE; ONE RECEPTACLE OUTLET IS CONTROLLED BY SWITCH 'c'.
	THE CONTROL DEVICE DESIGNATION IS INDICATED BY A LOWER CASE LETTER. EXAMPLE: SINGLE POLE SWITCH 'd' TO CONTROL LIGHTING FIXTURES INDICATED BY 'q'.
	TRANSFORMERS: THE TRANSFORMER TYPE IS INDICATED BY A NUMBER FOLLOWING THE UPPER CASE LETTER 'T'. SEE THE TRANSFORMER SCHEDULE OR THE SINGLE LINE DIAGRAM FOR THE TRANSFORMER DESCRIPTION AND REQUIREMENTS. EXAMPLE: TRANSFORMER TYPE 'T1'.
	PANELBOARDS: PANELBOARD DOORS MAY BE SHOWN TO INDICATE OPENING SIZE OF RECESSED PANELBOARDS. SEE PANELBOARD IDENTIFICATION FOR DESIGNATION CODES.
	SHEET KEY NOTE: SEE THE SHEET KEY NOTES ON THAT SHEET FOR THE NOTE NUMBER INDICATED IN THE HEXAGON.
	DEMOLITION KEY NOTE: SEE THE SHEET KEY NOTES ON THAT SHEET FOR THE NOTE NUMBER INDICATED IN THE SQUARE.
	HOME RUN TO BRANCH CIRCUIT PANEL: THE PANEL DESIGNATION AND CIRCUIT DESIGNATION ARE SHOWN ADJACENT TO THE HOME RUN ARROW. CIRCUIT BREAKER SIZES (AMPS/NUMBER OF POLES) ARE SHOWN IN THE PANEL SCHEDULE WITH THE CORRESPONDING PANEL AND CIRCUIT DESIGNATION. EXAMPLE: HOME RUN TO PANELBOARD 'LPN'; CIRCUITS 1, 3, 5.
	SYMBOL NOTATIONS: UPPER CASE LETTERS ADJACENT TO SYMBOLS INDICATE A UNIT TYPE. SEE APPROPRIATE SCHEDULE OR SPECIFICATIONS.

LIGHTING SYMBOL LEGEND		
SYMBOL	HEIGHT AFF *	DESCRIPTION
	---	2' X 2' RECESSED ARCHITECTURAL TROFFER
	---	2' X 4' RECESSED ARCHITECTURAL TROFFER
	---	2' X 4' RECESSED FLAT LENS TROFFER
	7'-0" CENTER	2' LINEAR - WALL MOUNTED
	7'-0" CENTER	4' LINEAR - WALL MOUNTED
	---	4' LINEAR STRIP - SUSPENDED
	---	6" DIAMETER RECESSED DOWNLIGHT
	7'-5" BOTTOM	EXIT SIGN - WALL MOUNTED
	---	EXIT SIGN - CEILING MOUNTED
	7'-6" CENTER	EMERGENCY LIGHT BATTERY OPERATED - WALL MOUNTED
	6'-0" CENTER	WALL SCONCE
	48" CENTER	SINGLE POLE WALL SWITCH
	---	SWITCH MODIFIERS: OS: OCCUPANCY SENSOR, LOW VOLTAGE, DUAL TECHNOLOGY VS: VACANCY SENSOR, LOW VOLTAGE, DUAL TECHNOLOGY DR: DUAL RELAY VSD: VACANCY SENSOR, LINE VOLTAGE, DIMMER OSD: OCCUPANCY SENSOR, LINE VOLTAGE, DIMMER LV: LOW VOLTAGE LVD: LOW VOLTAGE DIMMER D: LINE VOLTAGE DIMMER T: DIGITAL TIMER K: KEYPAD 3: 3 WAY 4: 4 WAY
	---	OCCUPANCY SENSOR, LOW VOLTAGE, DUAL TECHNOLOGY - CEILING MOUNTED
	---	OCCUPANCY SENSOR, LOW VOLTAGE, DUAL TECHNOLOGY - WALL/CORNER MOUNTED
	---	LOW VOLTAGE LIGHTING CONTROL DEVICE
	---	LOW VOLTAGE LIGHTING CONTROL DEVICE WITH 0-10V DIMMING
	---	LIGHT LEVEL SENSOR, SINGLE ZONE DIMMING CLOSED LOOP - CEILING MOUNTED
* - ANY HEIGHTS INDICATED IN PLANS SHALL SUPERSEDE THOSE LISTED HERE.		


ELECTRICAL SYMBOL LEGEND		
SYMBOL	HEIGHT	DESCRIPTION
	18"	120V SIMPLEX RECEPTACLE
	18"	120V DUPLEX RECEPTACLE
	18"	120V DUPLEX RECEPTACLE EMERGENCY OUTLET AND COVER PLATE SHALL BE RED IN COLOR
	18"	120V QUADRUPLX RECEPTACLE
	18"	120V QUADRUPLX RECEPTACLE EMERGENCY OUTLET AND COVER PLATE SHALL BE RED IN COLOR
	18"	208V DUPLEX RECEPTACLE
	18"	SPECIAL RECEPTACLE
	---	120V DUPLEX RECEPTACLE FLOOR BOX
	---	120V DUPLEX RECEPTACLE EMERGENCY FLOOR BOX OUTLET AND COVER PLATE SHALL BE RED IN COLOR
	---	120V QUADRUPLX RECEPTACLE FLOOR BOX
	---	120V QUADRUPLX RECEPTACLE EMERGENCY FLOOR BOX OUTLET AND COVER PLATE SHALL BE RED IN COLOR
	---	RECEPTACLE MODIFIERS: AC: 3" ABOVE COUNTERTOP/BACKSPLASH GFI: GROUND FAULT CURRENT INTERRUPTER WP: WEATHERPROOF ENCLOSURE DED: DEDICATED CIRCUIT
	AS NOTED	JUNCTION BOX, WALL MOUNTED, PURPOSE AS NOTED
	AS NOTED	JUNCTION BOX, CEILING MOUNTED, PURPOSE AS NOTED
	AS NOTED	JUNCTION BOX, FLOOR MOUNTED, PURPOSE AS NOTED
	---	EQUIPMENT CONNECTION
	72" TOP	DISCONNECT SWITCH NON-FUSED
	72" TOP	DISCONNECT SWITCH FUSED
	48"	SINGLE POLE WALL SWITCH: 48" AFF STANDARD UNO
SWITCH MODIFIERS: M: MOTOR-RATED		
ALL HEIGHTS ARE TO CENTER OF DEVICE UNLESS NOTED OTHERWISE. TOP: HEIGHT TO TOP OF DEVICE ANY HEIGHTS INDICATED IN PLANS SHALL SUPERSEDE THOSE LISTED HERE.		

LUMINAIRE SCHEDULE							
GENERAL NOTES							
A. MANUFACTURER AND CATALOG NUMBERS SHOWN ARE FOR BASIS OF DESIGN, DESCRIPTIVE AND QUALITY STANDARDS ONLY. NOT TO BE USED FOR ORDERING WITHOUT VERIFICATION AND APPROVAL. CONTRACTOR TO PROVIDE PRODUCT OR EQUAL FOR APPROVAL BY OWNER, ARCHITECT AND ENGINEER. ENGINEER SHALL NOT BE RESPONSIBLE FOR MISMATCHED OR INACCURATE PART NUMBERS.							
B. FOR ALL LED FIXTURES, THE FIXTURE SHALL BE CAPABLE OF SELF-RESETTING TO THE SWITCHED/CONTROLLED STATE DURING ANY FLUCTUATION IN POWER SUPPLY WHERE AUTOMATIC PROTECTIVE MEASURES DISABLE THE LED LAMPS. PROVIDE A LETTER OR STATEMENT FROM THE MANUFACTURER, OR OTHER ACCEPTABLE PROOF, THAT ALL LED FIXTURES, WITH OR WITHOUT BROWNOUT PROTECTION, SHALL RETURN TO THE SWITCHED/CONTROLLED STATE AUTOMATICALLY. PROVIDE STATEMENT WITH THE FIXTURE SUBMITTALS.							
C. LIGHTING CONTROLS, INCLUDING CONTROL SCHEMATICS, DEVICES, SWITCHES, SENSORS AND GRAPHIC DISPLAYS/CONTROLLERS. THIS INFORMATION MUST BE SUBMITTED WITH THE LIGHT FIXTURE SHOP DRAWINGS, FOR A COMPLETE REVIEW.							
D. ALL LIGHTING FIXTURES ARE TO BE MULTI-VOLT.							
TYPE	DESCRIPTION	MOUNTING	LAMP	DRIVER	VOLTAGE	WATTS	MANUFACTURER
A	4' LINEAR LED STRIPLIGHT WITH FROSTED LENS	CHAIN SUSPEND	LED, 4,900 LUMENS, 80 CRI, 4000K	ELECTRONIC LED DRIVER	MULTI-VOLT	38 W	METALUX
B	4' LINEAR SURFACE MOUNTED EXTREME ENVIRONMENT LED ELEVATOR PIT LIGHT; WITH RIBBED FROSTED ACRYLIC LENS; ENCLOSED AND GASKETED; WET LOCATION	SURFACE WALL	LED, 4,250 LUMENS, 80 CRI, 4000K	ELECTRONIC LED DRIVER	120.00 V	33 W	COLUMBIA LIGHTING

CONSULTANTS:



Michael Blades & Associates, Ltd
Elevator and Escalator Consulting

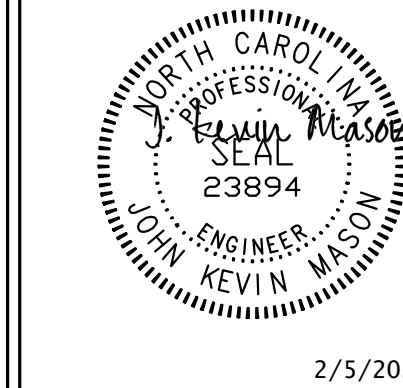

PROJECT MANAGER

ACG Project Number
21-344



Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511

Engineers | Architects

www.acg-pa.com

919-858-7420

© COPYRIGHT Apogee Consulting Group, P.A.

Office of
Construction
and Facilities
Management

 U.S. Department
of Veterans Affairs

Drawing Title
ELECTRICAL GENERAL NOTES,
SYMBOL LEGENDS, AND
ABBREVIATIONS

Location
TUSCALOOSA VAMC, VISN 7

Project Title
ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137

Approved

Date
FEBRUARY 6, 2025

Checked
JKM

Drawn
PDN

VA PROJECT NUMBER
679-22-100

Building Number
1, 2, 5, 38, 135, & 137

Drawing Number
E-001

Dwg 1 of 16

FULLY SPRINKLERED
100% BID DOCUMENTS

C:\Users\jmuenschwand\Documents\E_21-344-VA_Tuscaloosa-Upgrade\Elevators-AL_Building_1_Administrative_prepress\cswand\enr.t

2/4/2025 3:15:26 PM

VA FORM 08-6231

CABLES AND CONNECTORS COLOR LEGEND					
DESCRIPTION ITEM	JACK	CABLE	PATCH CABLES	I.D.	NOTES
TELEPHONE	IVORY	IVORY	IVORY	T	4 PAIR CABLE
DATA/COMPUTER	BLUE	BLUE	BLUE	C	4 PAIR CABLE
DATA/COMPUTER	YELLOW	YELLOW	YELLOW	C	4 PAIR CABLE
WIRELESS ACCESS POINT	GREEN	GREEN	GREEN	WAP	4 PAIR CABLE
FIBER - MULTI-MODE	BLACK	AQUA	AQUA	FO	6/12/24/36
FIBER - SINGLE-MODE	IVORY	YELLOW	YELLOW	FO	6/12
SOUND SYSTEM	N/A	GREEN	N/A	SS	MULTI COLOR CONDUCTORS
NURSE CALL	N/A	YELLOW	N/A	NC	4 PAIR UTP
MATV	N/A	BLACK	N/A	MATV	COAX RG6
CCTV - IP	WHITE	WHITE	WHITE	CCTV	CCTV
PACS	N/A	GRAY	N/A	PACS	MULTI COLOR CONDUCTORS

TECHNOLOGY SYMBOL LEGEND		
SYMBOL	HEIGHT	DESCRIPTION
▼N	18"	DATA OUTLET - N-4 PR UTP (N - QUANTITY)
▼N	48"	TELCO OUTLET - N-4 PR UTP (N - QUANTITY)
W	48"	WALL PHONE
⌵N	CEILING	WIRELESS ACCESS POINT - N-4 PR UTP (N - QUANTITY)
S⌵N	CEILING	SECURE WIRELESS ACCESS POINT - N-4 PR UTP (N - QUANTITY)
⌵	AS NOTED	TV OUTLET WALL MOUNTED
PACS	6" TO TOP	PHYSICAL ACCESS CONTROL SYSTEM
⌵	48"	CARD READER (K - KEYPAD)
⌵	DOOR	ELECTRONIC LOCKING MECHANISM
⌵	DOOR	ELECTRONIC PANIC HARDWARE
⌵	DOOR	DOOR CONTACT
⌵	ABOVE DOOR	REQUEST FOR EXIT SENSOR
⌵	DOOR	DOOR OPERATOR
⌵	48"	HANDWAVE
⌵	48"	EMERGENCY EXIT BUTTON TO RELEASE DOOR (EEB)
⌵	88"	MOTION DETECTOR
⌵	54"	INTERCOM WITH CAMERA
⌵M	DESK	INTERCOM MASTER WITH PUSH TO RELEASE DOOR
NCE	6" TO TOP	NURSE CALL EQUIPMENT CABINET
⌵	18"	NURSE CALL MASTER STATION/CONSOLE
⌵	HEADWALL	NURSE CALL PATIENT STATION WITH PILLOW SPEAKER 2 ADDITIONAL PUSHBUTTONS, 1/4 RECEPTACLE AND COVER (1 - SINGLE, 2 - DUAL, V - VANDAL RESISTANT)
⌵	HEADWALL	NURSE CALL PATIENT STATION WITH CALL CORD. (1 - SINGLE, 2 - DUAL, V - VANDAL RESISTANT)
⌵	40", 72"	NURSE CALL EMERGENCY STATION WITH PULL CORD AND AUDIO +40" AFF IN RESTROOM, +72" AFF IN SHOWER (V - VANDAL RESISTANT, PB - PUSH BUTTON)
⌵	HEADWALL /40"	NURSE CALL CODE BLUE STATION WITH COVER
⌵	CEILING	NURSE CALL DOME LIGHT (Z - ZONE LIGHT, V - VANDAL RESISTANT)
⌵	ABOVE DOOR	NURSE CALL DOME LIGHT
⌵	18"	NURSE CALL PATIENT BED INTERFACE RECEPTACLE
⌵	60"	NURSE CALL DUTY STATION
⌵	60"	NURSE CALL STAFF TERMINAL
⌵	CEILING	NURSE CALL WIRELESS ANTENNAS
⌵	CEILING	WIRELESS PENDANT
⌵M	48"	PATIENT STATION (PB - PUSH BUTTON, M - MICROPHONE, K - KEYED)
⌵	CEILING	CCTV DOME CAMERA FIXED
⌵	CEILING	CCTV DOME CAMERA PAN/TILT/ZOOM
⌵	FLOOR	FOUR POST OIT EQUIPMENT RACK
⌵	FLOOR	TWO POST OIT EQUIPMENT RACK
⌵	FLOOR	OIT EQUIPMENT CABINET
MATV	6" TO TOP	MATV EQUIPMENT CABINET
CCTV	FLOOR	CCTV EQUIPMENT CABINET
⌵	ABOVE CEILING	LADDER CABLE TARY
⌵	18"	GROUND BUS
⌵	8"	4x8x3/4" FIRE RATED TTb
⌵	FLOOR	FLOOR BOX FOR DATA
⌵	48"	PATIENT ROAM ALERT ACCESS CONTROL KEYPAD
⌵	CEILING	PATIENT ROAM ALERT ANTENNA
⌵	CEILING	CEILING MOUNTED SPEAKERS
⌵	96"	WALL MOUNTED SPEAKERS
⌵	6" TO TOP	AREA OF REFUGE PANEL
⌵	6" TO TOP	AREA OF REFUGE ANNUNCIATION PANEL
⌵	48"	AREA OF REFUGE INTERCOM
⌵	CEILING	AREA OF REFUGE STROBE LIGHT
⌵	48"	DURESS PANIC ALARM PUSH BUTTON
DPP	6" TO TOP	DURESS PANIC ALARM PANEL
⌵	CEILING	TELEMETRY ANTENNA - 2-4 PR
⌵	CEILING	ROBOT PHARMACY ANTENNA - 1-4 PR
⌵	CEILING	CEILING MOUNTED MICROPHONE
⌵	48"	WALL CONNECTION POINT FOR MICROPHONE - SEE PLAN KEYNOTES
⌵	FLOOR	FLOOR MOUNTED MICROPHONE
⌵	AS NOTED	MICROPHONE - SEE PLAN KEYNOTES
ALL HEIGHTS ARE TO CENTER OF DEVICE UNLESS NOTED OTHERWISE. ANY HEIGHTS INDICATED IN PLANS SHALL SUPERSEDE THOSE LISTED HERE. SEE DRAWINGS FOR MORE INFORMATION. NOTE: NOT ALL SYMBOLS ARE USED.		

TECHNOLOGY GENERAL NOTES	
1.	PROVIDE COMMUNICATIONS DEVICES AND EQUIPMENT IN ACCORDANCE WITH THE CONTRACT DOCUMENTS, MANUFACTURER'S RECOMMENDED PROCEDURES, ALL APPLICABLE LOCAL AND STATE CODES, AMERICANS WITH DISABILITIES ACT, LATEST EDITION OF THE NATIONAL ELECTRICAL CODE, BICSI STANDARDS, AND VA STANDARDS.
2.	PROVIDE ADDITIONAL SUPPORT FOR DEVICES AND EQUIPMENT WHERE BUILDING CONSTRUCTION IS NOT SUITABLE FOR DIRECT MOUNTING.
3.	FIRESTOP, DRAFTSTOP, SMOKESTOP OR PROTECT ANNULAR SPACE AROUND PENETRATIONS THROUGH WALLS, PARTITIONS, FLOORS, CEILINGS, AND ROOF IN ACCORDANCE WITH REQUIREMENTS OF NFPA 70, UL LISTING REQUIREMENT AND APPLICABLE BUILDING CODES.
4.	PROVIDE CABLING THAT COMPLIES WITH THE LATEST EDITION OF TELECOMMUNICATIONS DISTRIBUTION METHOD MANUAL AND ANSITIAIEIA PUBLICATIONS.
5.	COMPLY WITH THE LATEST ANSITIAIEIA 758 AND 607B OR 607A - GROUNDING AND BONDING REQUIREMENTS FOR TELECOMMUNICATIONS IN COMMERCIAL BUILDING.
6.	COMPLY WITH THE LATEST ANSITIAIEIA 568B - COMMERCIAL BUILDING TELECOMMUNICATIONS WIRING STANDARD.
7.	COMPLY WITH THE LATEST ANSITIAIEIA 569B - COMMERCIAL BUILDING STANDARD FOR TELECOMMUNICATIONS PATHWAYS AND SPACES.
8.	COMPLY WITH THE LATEST NFPA 70 NATIONAL ELECTRICAL CODE.
9.	COMPLY WITH THE LATEST NFPA 99 HEALTHCARE FACILITIES CODE.
10.	COMPLY WITH THE LATEST NFPA 101 LIFE SAFETY CODE.
11.	COORDINATE WORK WITH ALL OTHER TRADES PRIOR TO INSTALLATION.
12.	MANUFACTURER'S NAME AND MODEL NUMBER ARE GIVEN FOR DESCRIPTIVE PURPOSES TO INDICATE A QUALITY STANDARD AND ARE NOT INTENDED TO LIMIT PRODUCTS TO A PARTICULAR MANUFACTURER. PRODUCTS DEEMED EQUAL AND APPROVED BY THE COR WILL BE ACCEPTABLE. COMPLY WITH "BUY AMERICAN ACT".
13.	MOUNTING HEIGHTS INDICATED ARE TO CENTER OF DEVICE, BOXES, OUTLET, OR EQUIPMENT UNLESS NOTED OTHERWISE.
14.	PROVIDE RGS OR EMT CONDUIT UNLESS OTHERWISE NOTED.
15.	PROVIDE MATERIALS, DEVICES, APPLIANCES AND EQUIPMENT LABEL LISTED BY APPROVED THIRD PARTY TESTING AGENCY.
16.	NOTIFY COR REGARDING DISCREPANCY BETWEEN PLANS AND SPECIFICATIONS FOR CLARIFICATION. THE MORE STRINGENT OF THE THEM SHALL TAKE PRECEDENCE.
17.	PROVIDE TIAIEIA CAT 6 COPPER OUTLETS AND CONNECTORS.
18.	ALL WORK AREA OUTLETS SHALL BE 8 PIN, CAT 6 KEYSTONE JACK WIRED PER T568A OR T568B AS DIRECTED BY THE VA COR.
19.	LABEL DEVICES IN ACCORDANCE WITH LATEST ANSITIA 606A OR 606B EDITION AS WELL AS THE STANDARDS SET FORTH BY THE VA HOSPITAL OIT.
20.	PROVIDE A MINIMUM OF 12" CLEARANCE ABOVE THE CABLE TRAY PER TIAIEIA 569.B PARAGRAPH 4.5.6.2.
21.	VA WILL CONDUCT A WAP SURVEY AND PROVIDE THE SURVEY TO THE CONTRACTOR. INSTALL CABLING AND EQUIPMENT IN ACCORDANCE WITH THE SURVEY. COORDINATE WITH COR/OIT.
22.	ALL CABLING INSTALLED ABOVE CEILING SHALL BE PLENUM RATED.
23.	MINIMUM CONDUIT SIZE TO BE USED IS 3/4".
24.	DEVICES PLACED IN INTERCOMMUNICATION ROOM TO BE MOUNTED ON FIRE RETARDANT PLYWOOD.
25.	ALL CAMERAS SHALL BE IN COMPLIANCE WITH THE NATIONAL DEFENSE AUTHORIZATION ACT.

TECHNOLOGY ABBREVIATIONS LIST			
ADO	AUTOMATIC DOOR OPERATOR	OC	ON CENTER
AFF	ABOVE FINISH FLOOR	OIT	OFFICE OF INFORMATION TECHNOLOGY
BOD	BASIS OF DESIGN	PACS	PHYSICAL ACCESS CONTROL SYSTEM
CCTV	CLOSED CIRCUIT TELEVISION	PAMN	PUBLIC ADDRESS AND MASS NOTIFICATION SYSTEM
COAX	COAXIAL CABLE	PB	PUSH BUTTON
COMM	COMMUNICATION	PBB	PRIMARY BONDING BUSBAR
COR	CONTRACTING OFFICER REPRESENTATIVE	PDU	RACK POWER DISTRIBUTION UNITS
		POE	POWER OVER ETHERNET
		PR	PAIR
DC	DOOR CONTACT SWITCH	RBB	RACK BONDING BUSBAR
DN	DOWN	RX	REQUEST TO EXIT
DO	DOOR OPERATOR		
DVC	DIGITAL VOICE COMMAND	SBB	SECONDARY BONDING BUSBAR
DVR	DIGITAL VIDEO RECORDER	SEP	SERVICE ENTRANCE PROTECTION
E	EXISTING DEVICES	SLC	SIGNALING LINE CIRCUIT
EEB	EMERGENCY EXIT BUTTON	SM	SINGLE MODE FIBER
EL	ELECTRICAL STRIKE		
ETR	EXISTING TO REMAIN	TBB	TELECOM BONDING CONDUCTOR
FA	FIRE ALARM	TEL	TELEPHONE
FACP	FIRE ALARM CONTROL PANEL	TGB	TELECOM GROUND BUS BAR
FAAP	FIRE ALARM ANNUNCIATOR PANEL	TM	TELEMONITORING
FO	FIBER OPTIC	TMCB	TELECOM MAIN GROUND BUS BAR
FAGAP	FIRE ALARM GRAPHIC ANNUNCIATOR PANEL	TP	TWISTED PAIR
IT	INTERCOMMUNICATION ROOM	TR	TELECOM ROOM
		TTB	TELEPHONE TERMINAL BOARD
		TV	TELEVISION
MATV	MASTER ANTENNA TELEVISION	WM	WIRE MANAGEMENT
MM	MULTI MODE FIBER	WAP	WIRELESS ACCESS POINT
NAC	NETWORK APPLIANCE CIRCUIT PANEL	UL	UNDERWRITERS LABORATORY
N	NEW DEVICES	UPS	UNINTERRUPTIBLE POWER SUPPLY
NCA	NETWORK CONTROL ANNUNCIATOR	UTP	UNSHIELDED TWISTED PAIR
NS	NO SCALE		
NTS	NOT TO SCALE		
NVR	NETWORK VIDEO RECORDER		

FULLY SPRINKLERED
100% BID DOCUMENTS

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

C:\Users\jreuschwand\Documents\E_21-344-VA_Tuscaloosa-Upgrade-Elevators-AL_Building_1_Administrative_jreuschwand.rvt
2/4/2025 3:15:21 PM
VA FORM 08-6231


SHEET NOTES:

- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO DEMOLITION, THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED, UNLESS NOTED OTHERWISE.
- E. ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.

#

KEY NOTES:

1. EXISTING DISCONNECT NOT IN USE, TO BE REMOVED.
2. EXISTING ELECTRICAL PANEL TO REMAIN.
3. EXISTING DISCONNECTS TO BE REPLACED WITH NEW FUSIBLE DISCONNECT SWITCH. MAINTAIN EXISTING CIRCUIT FOR RECONNECTION TO NEW FUSIBLE DISCONNECT.
4. ALL EXISTING LIGHT FIXTURES AND SWITCHES ARE TO BE DEMOLISHED AND REPLACED. MAINTAIN EXISTING CIRCUITING FOR NEW LIGHT FIXTURES AND SWITCHES.
5. DEMOLISH EXISTING EQUIPMENT AND REPLACE.
6. ALL EXISTING RECEPTACLES ARE TO BE DEMOLISHED AND REPLACED WITH NEW GFI RECEPTACLES OF THE SAME TYPE. MAINTAIN EXISTING CIRCUITRY FOR NEW REPLACEMENT RECEPTACLES.

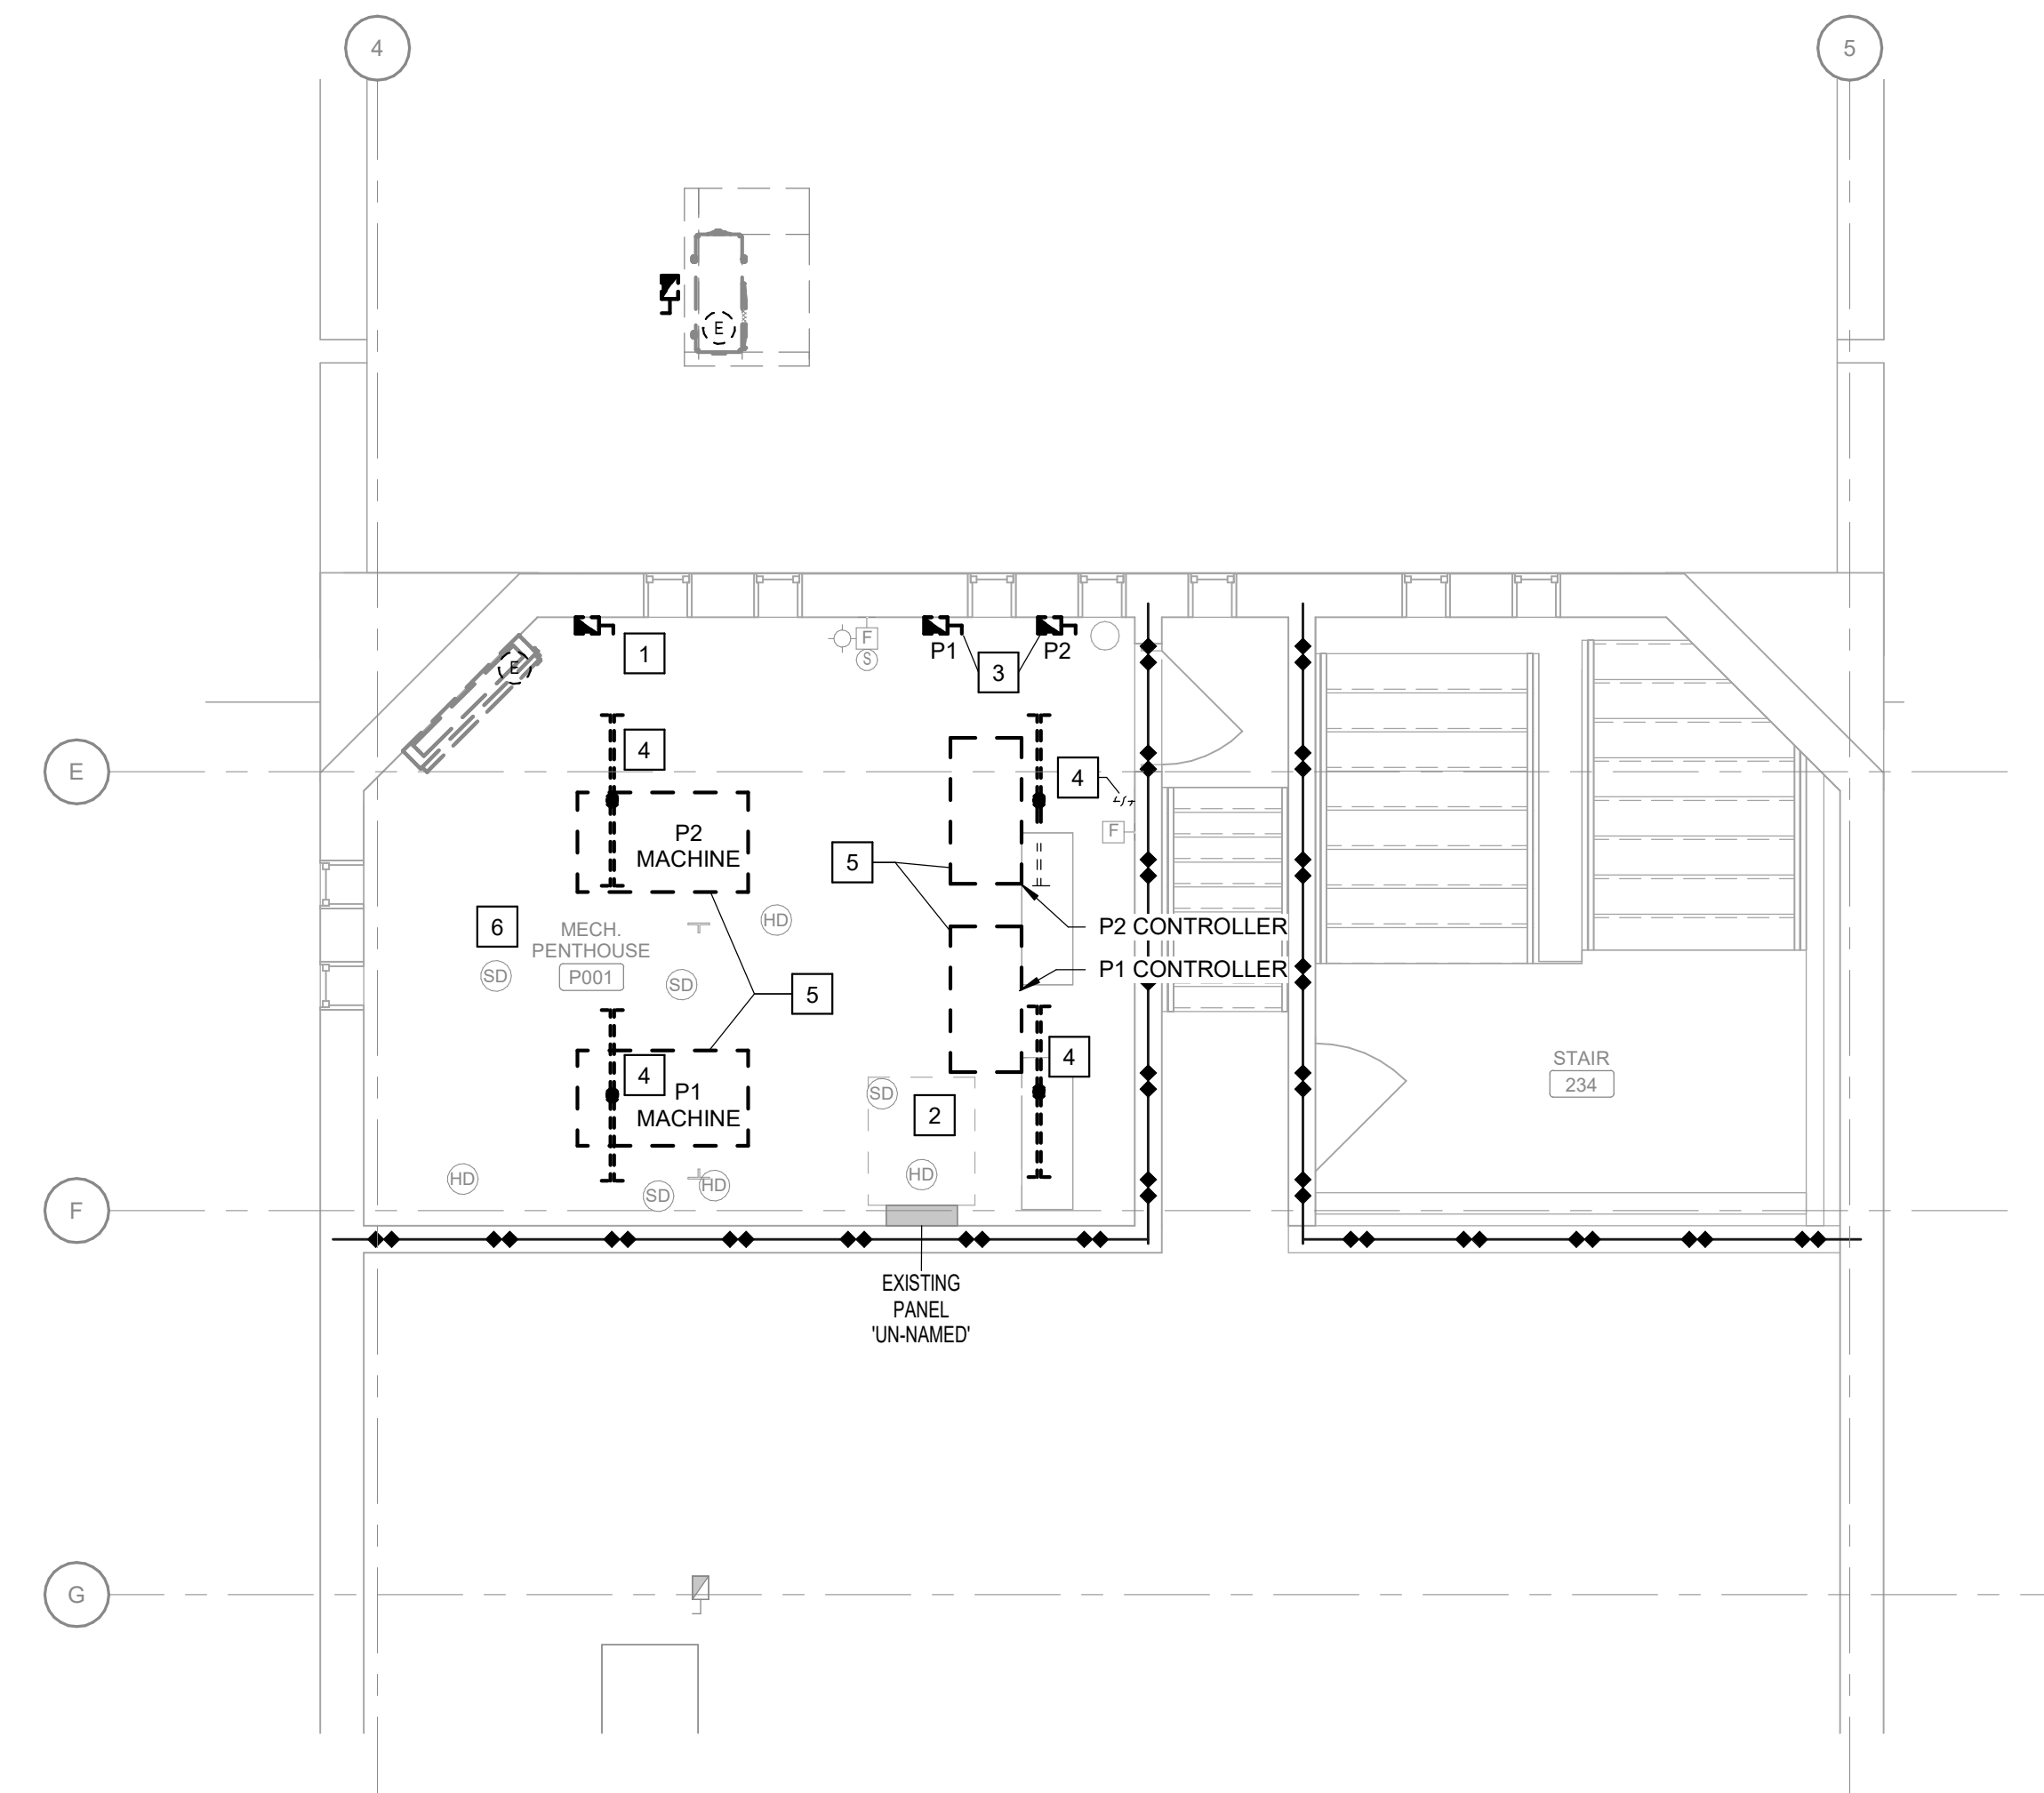

**BUILDING 1 PARTIAL MECHANICAL PENTHOUSE
ELECTRICAL DEMOLITION PLANS - P1 & P2**

Scale: 1/4" = 1'-0"


ALTERNATE NOTES

1. DELETE ALL WORK IN BUILDING NUMBER 1

KEY PLAN

SCALE: NO SCALE

AREA OF WORK

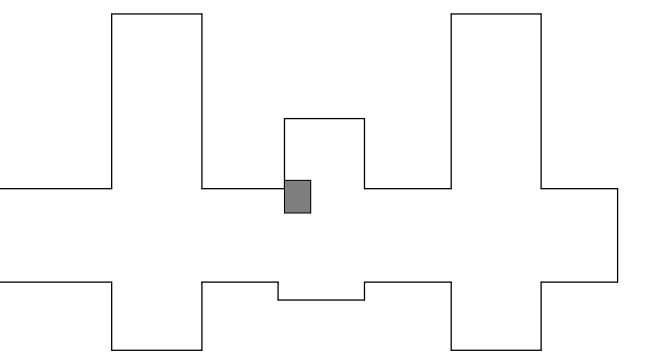


WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% BID DOCUMENTS

CONSULTANTS:

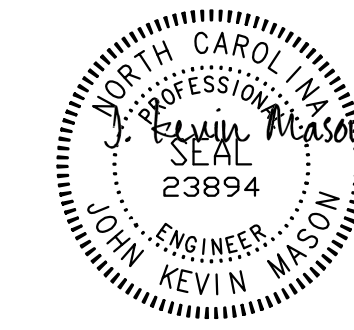

PROJECT MANAGER

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of
Construction
and Facilities
Management



Drawing Title
**BUILDING 1 PARTIAL MECHANICAL
PENTHOUSE ELECTRICAL DEMOLITION
PLANS - P1 & P2**

Location
TUSCALOOSA VAMC, VISN 7

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**

Approved
Date
FEBRUARY 6, 2025

Checked
JKM

Drawn
PDN

VA PROJECT NUMBER
679-22-100

Building Number
1

Drawing Number
1.ED101

Dwg 3 of 16

Revisions: Date

PANEL: 1-RP-EQ-5CB2									
VOLTAGE: 120/208V, 3PH, 4W				MAINS: 100 A MAIN CB			AIC: 10,000 AMPS SYMMETRICAL		
MOUNTING: SURFACE				FED FROM:			LOCATION:		
ENCLOSURE: NEMA 1				BRANCH:			EXISTING/NEW: New Construction		
LOAD NAME	BKR	P	CKT	A (kVA)	B (kVA)	C (kVA)	CKT	P	BKR
RGPT MECH CONV	20 A	1	1	0.18	2.03		2		
P1 & P2 PIT LIGHTS	20 A	1	3		0.07	2.03		2	30 A
P1 & P2 PIT RECPT	20 A	1	5			0.36	1.14	6	1
SPACE	--	1	7	--	--			8	1
SPACE	--	1	9	--	--			10	1
SPACE	20 A	1	11			0	0	12	1
SPACE	20 A	1	13	0	0			14	1
SPACE	20 A	1	15		0	0		16	1
SPACE	20 A	1	17			0	0	18	1
SPACE	20 A	1	19	0	0			20	1
SPACE	20 A	1	21		0	0		22	1
SPACE	20 A	1	23			0	0	24	1
SPACE	20 A	1	25	0	0			26	1
SPACE	20 A	1	27		0	0		28	1
SPACE	20 A	1	29			0	0	30	1
SPACE	20 A	1	31	0	0			32	1
SPACE	20 A	1	33		0	0		34	1
SPACE	20 A	1	35			0	0	36	1
SPACE	20 A	1	37	0	0			38	1
SPACE	20 A	1	39		0	0		40	1
SPACE	20 A	1	41			0	0	42	1
PER PHASE CONNECTED LOAD:				2.21 kVA	2.09 kVA	1.50 kVA			
LOAD SUMMARY	CONNECTED LOAD		DEMAND FACTOR		DEMAND LOAD		TOTALS		
MOTOR/HVAC	5.02 kVA		120.22%		6.03 kVA				
RECEPTACLES (GENERAL)	0.72 kVA		100.00%		0.72 kVA				
LIGHTING (GENERAL)	0.07 kVA		125.00%		0.08 kVA				

SHEET NOTES:


- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO DEMOLITION, THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED, UNLESS NOTED OTHERWISE.
- E. ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.

KEY NOTES:

- 1 ALL EXISTING RECEPTACLES ARE TO BE DEMOLISHED AND REPLACED WITH NEW GFI RECEPTACLES OF THE SAME TYPE. MAINTAIN EXISTING CIRCUITRY FOR NEW REPLACEMENT RECEPTACLES.
- 2 ALL DISCONNECTS ARE EXISTING TO REMAIN.
- 3 ALL EXISTING LIGHT FIXTURES AND SWITCHES ARE TO BE DEMOLISHED AND REPLACED. MAINTAIN EXISTING CIRCUITING FOR NEW LIGHT FIXTURES AND SWITCHES.

KEY PLAN

SCALE: NO SCALE

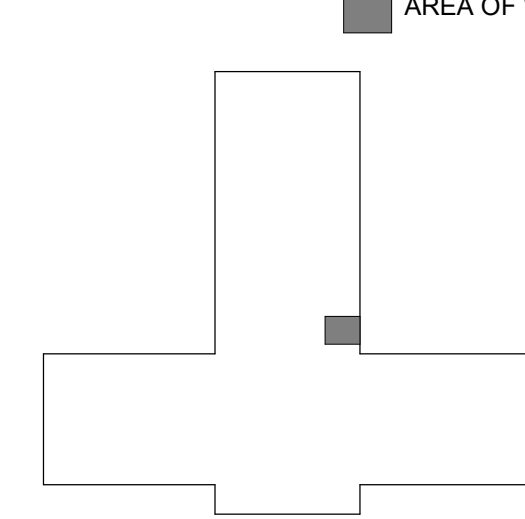


WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS


1 BUILDING 2 ELEVATOR PIT ELECTRICAL DEMOLITION PLAN - P3

Scale: 1/2" = 1'-0"


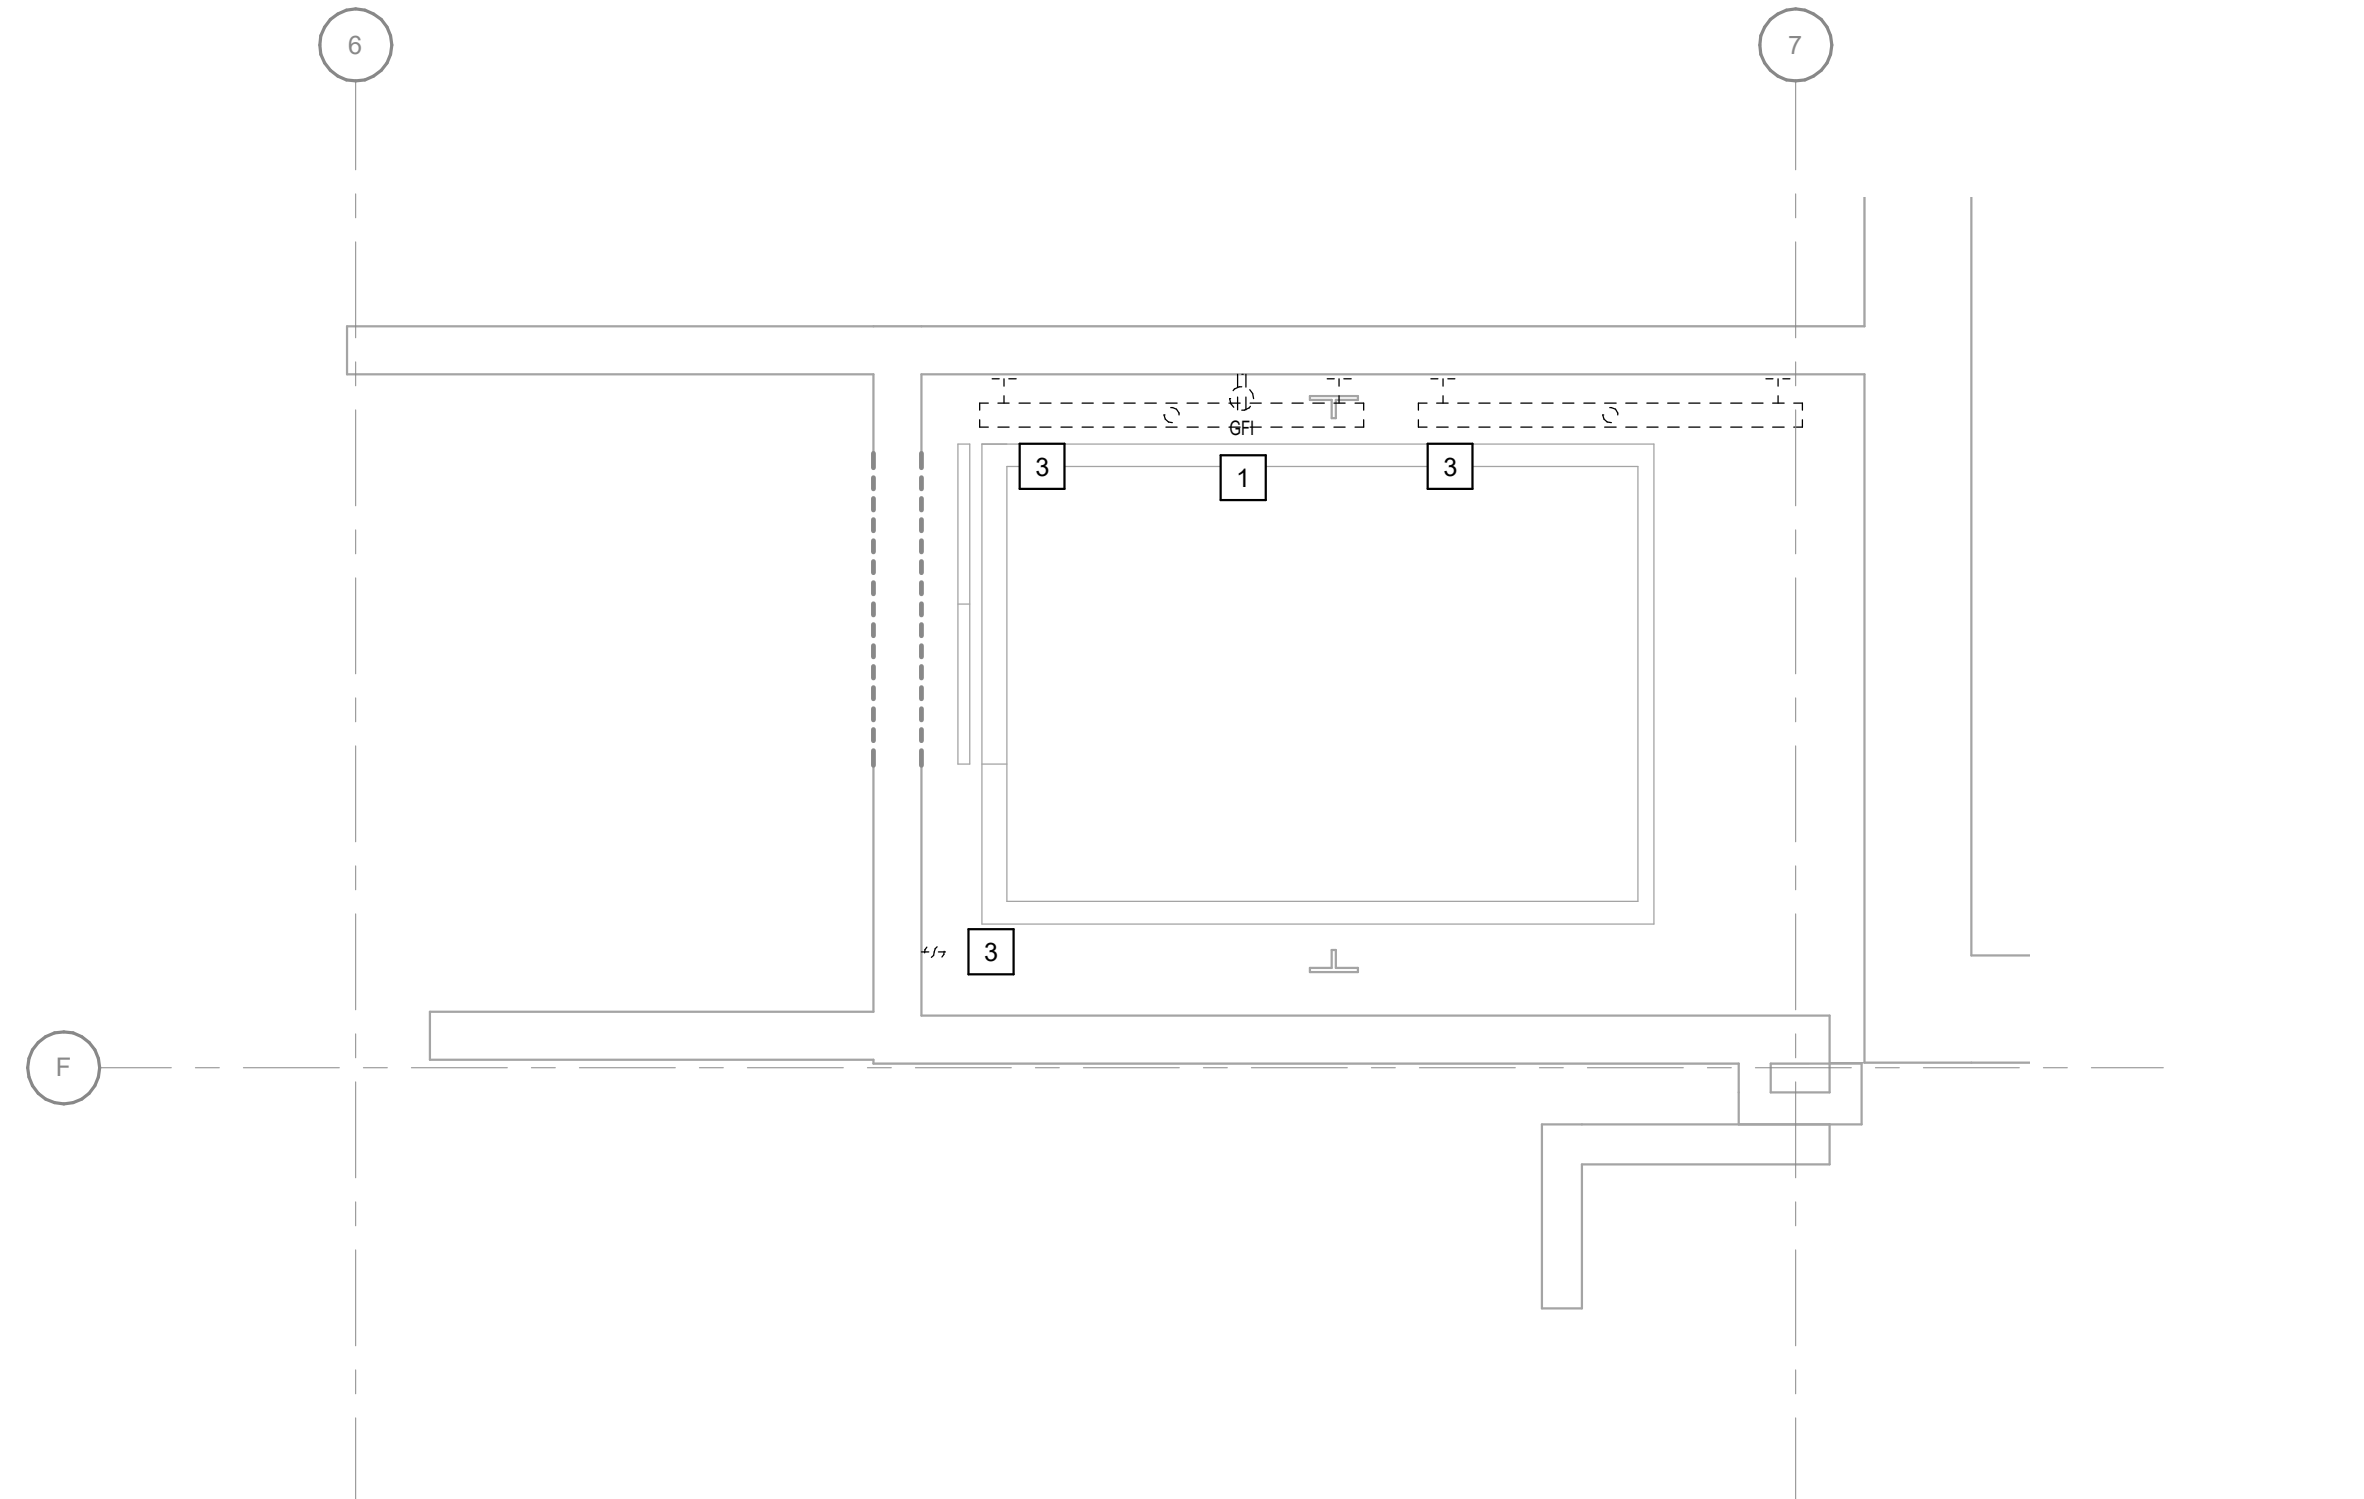


2 BUILDING 2 PARTIAL ATTIC ELECTRICAL DEMOLITION PLAN - P3

Scale: 1/2" = 1'-0"

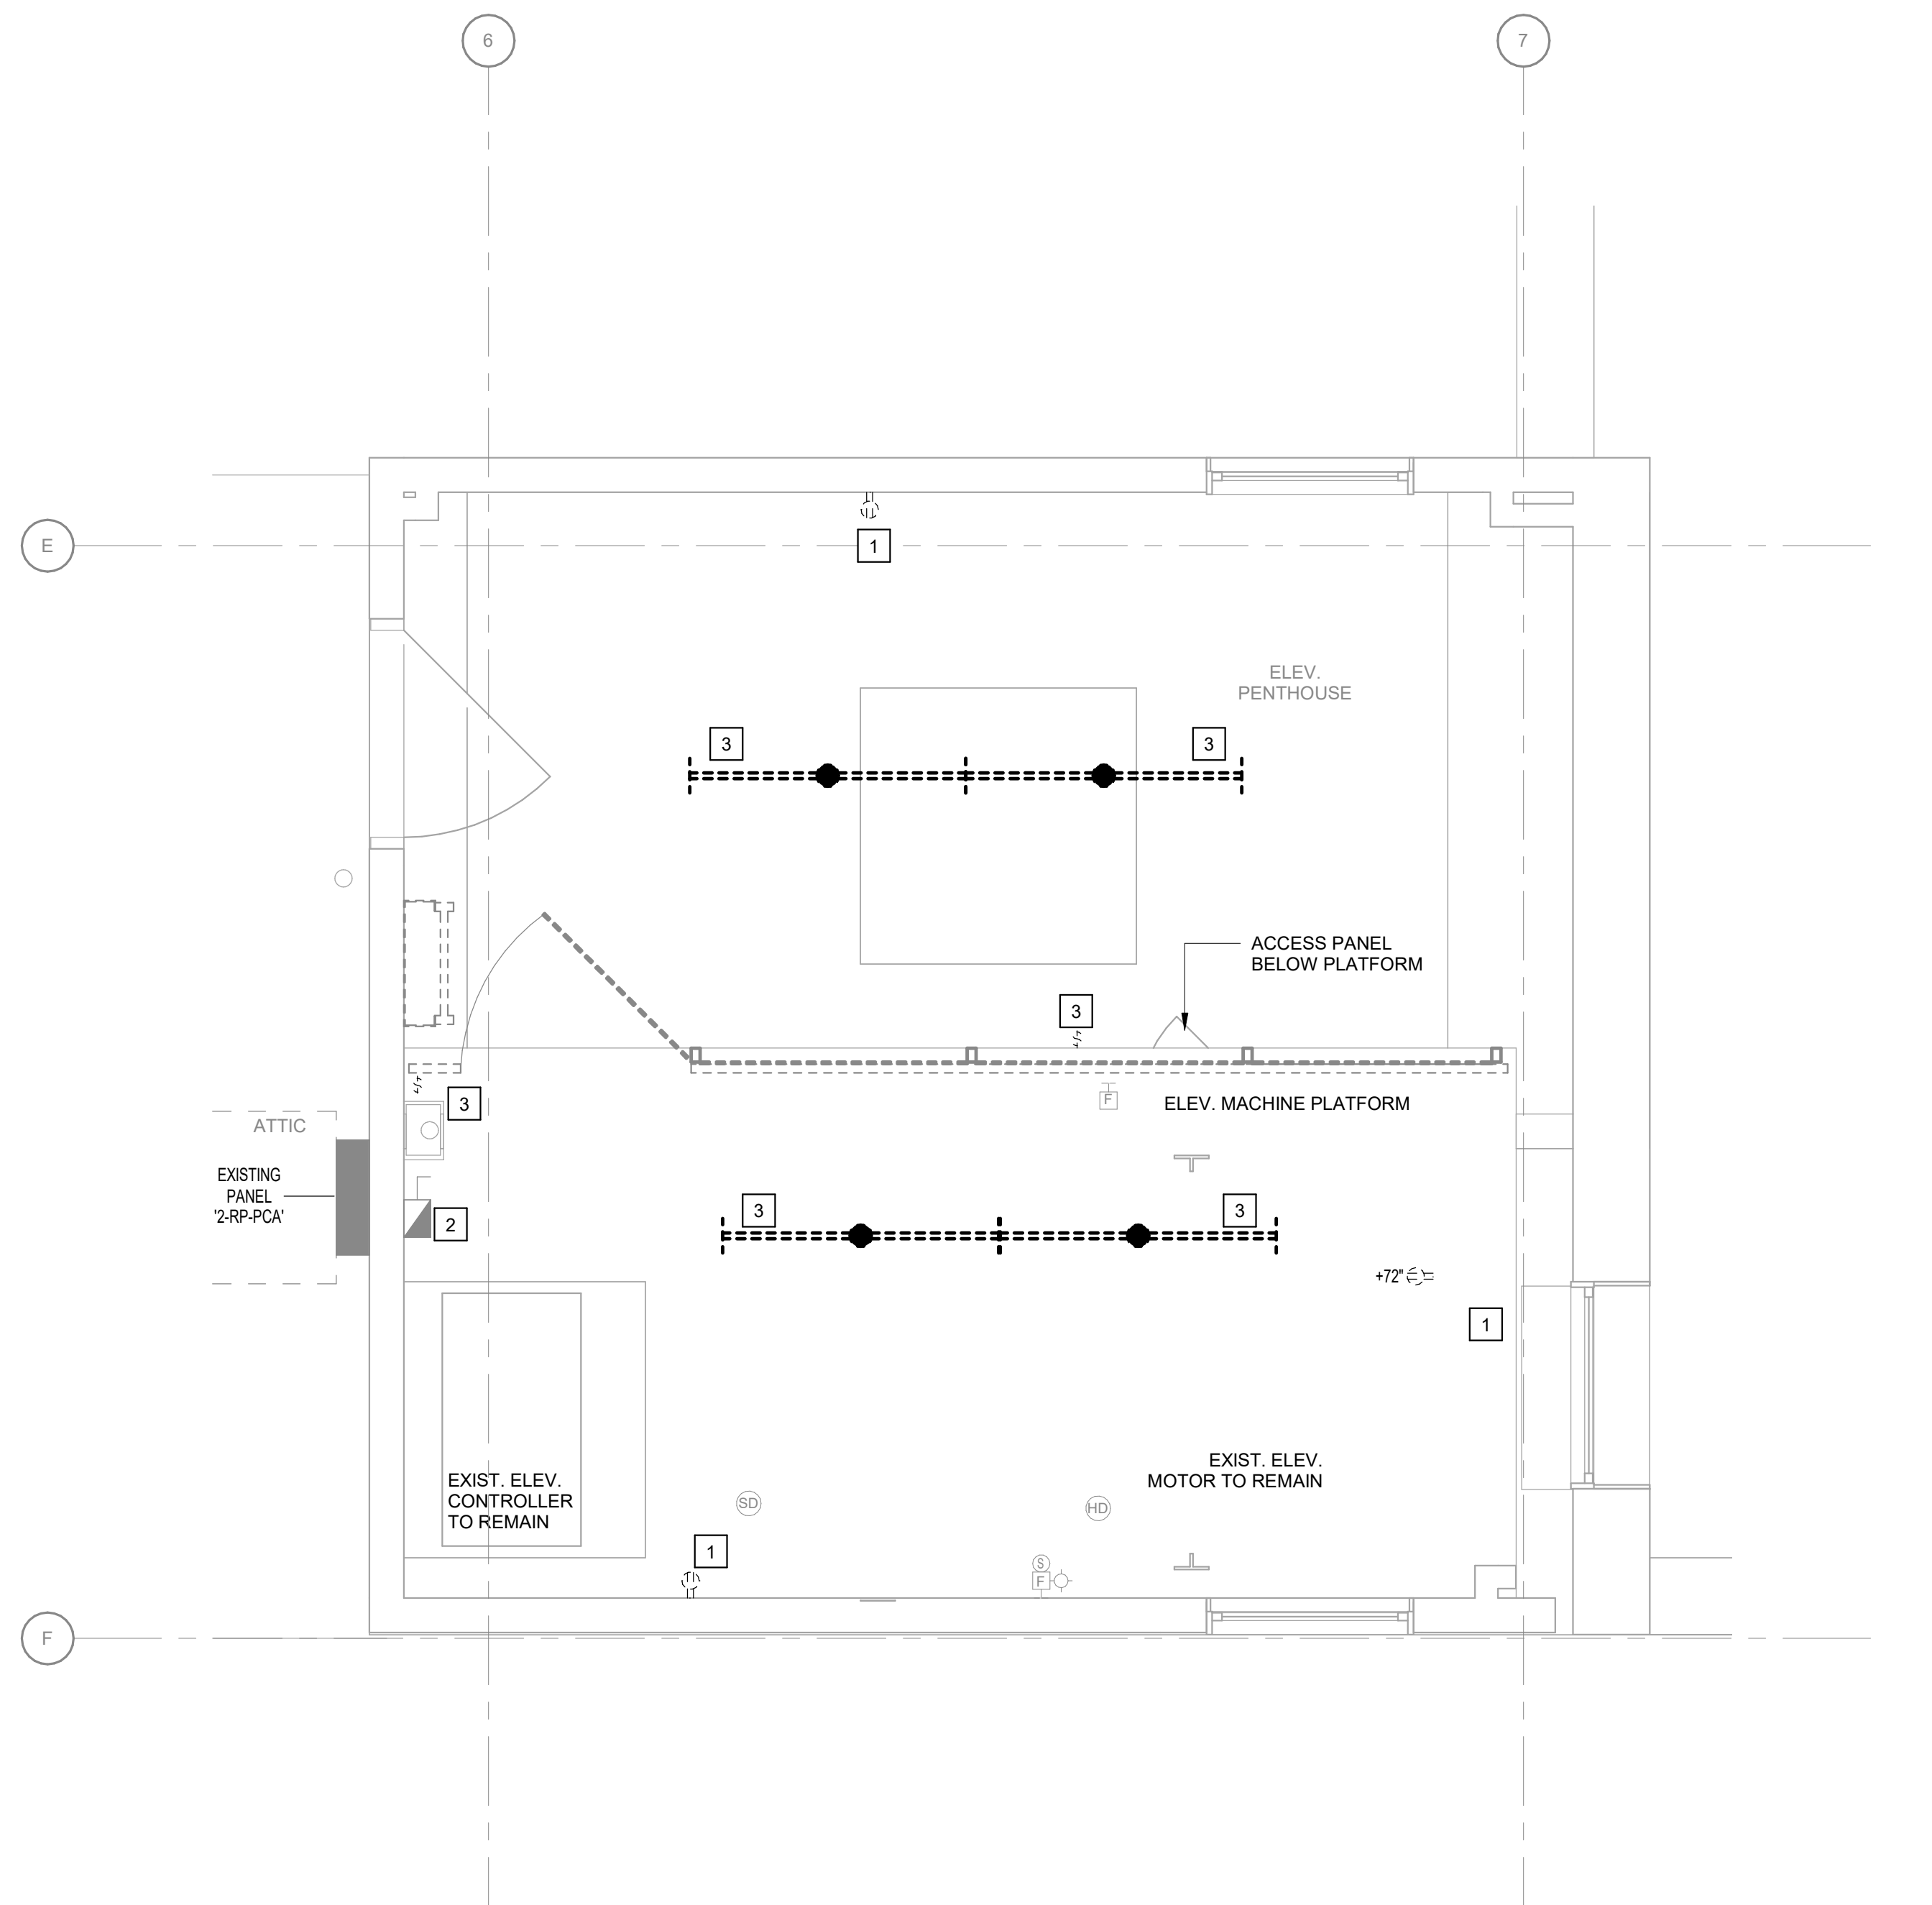


CONSULTANTS:

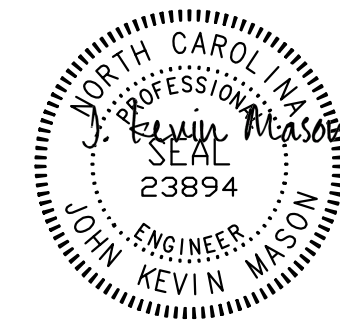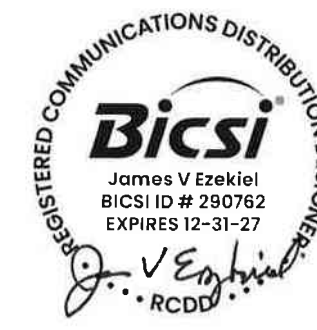

PROJECT MANAGER

ACG Project Number
21-344

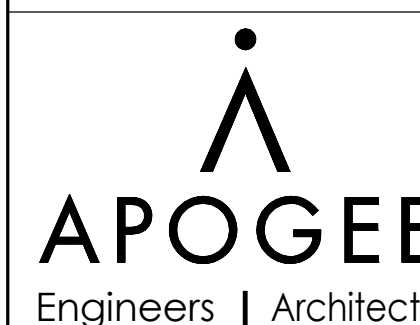

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511

www.acg-pa.com 919-858-7420

Office of
Construction
and Facilities
Management



Drawing Title
**BUILDING 2 PARTIAL ATTIC
ELECTRICAL DEMOLITION PLAN - P3**

Location
TUSCALOOSA VAMC, VISN 7

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**

Approved
Date
FEBRUARY 6, 2025

Checked
JKM

Drawn
AMM


VA PROJECT NUMBER
679-22-100


Building Number
2

Drawing Number
2.ED101

Dwg 5 of 16

Revisions: Date

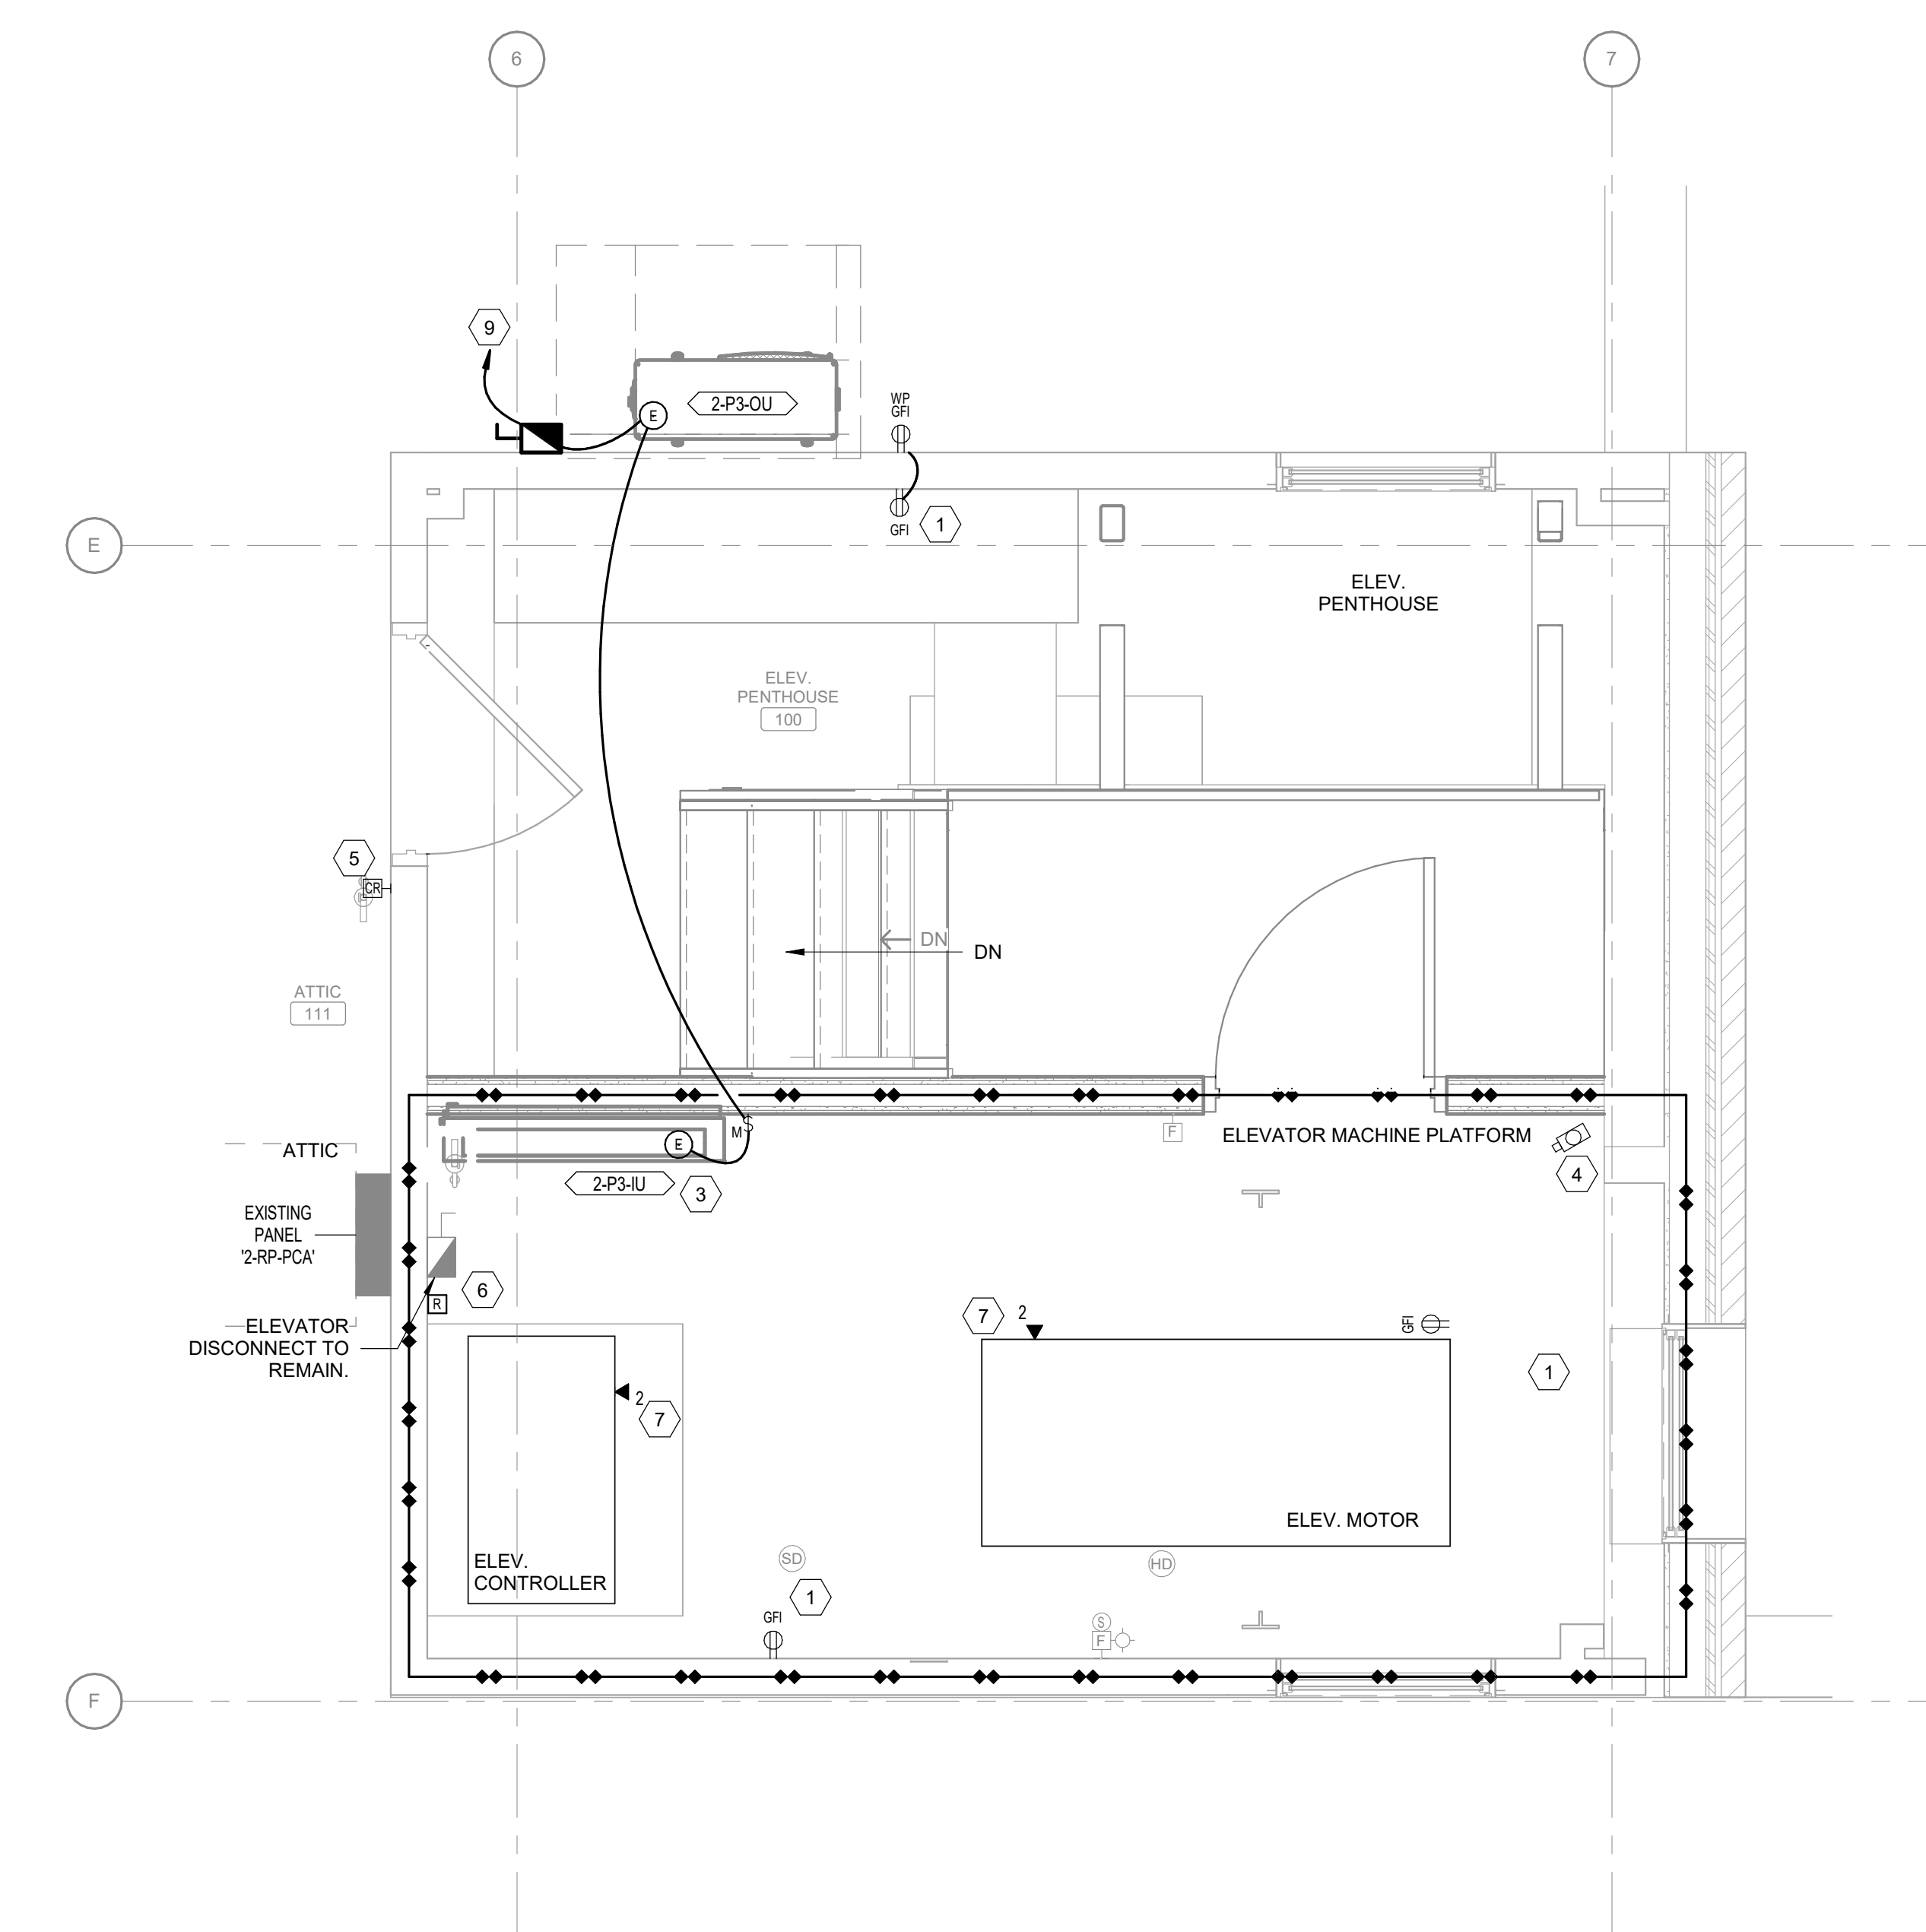

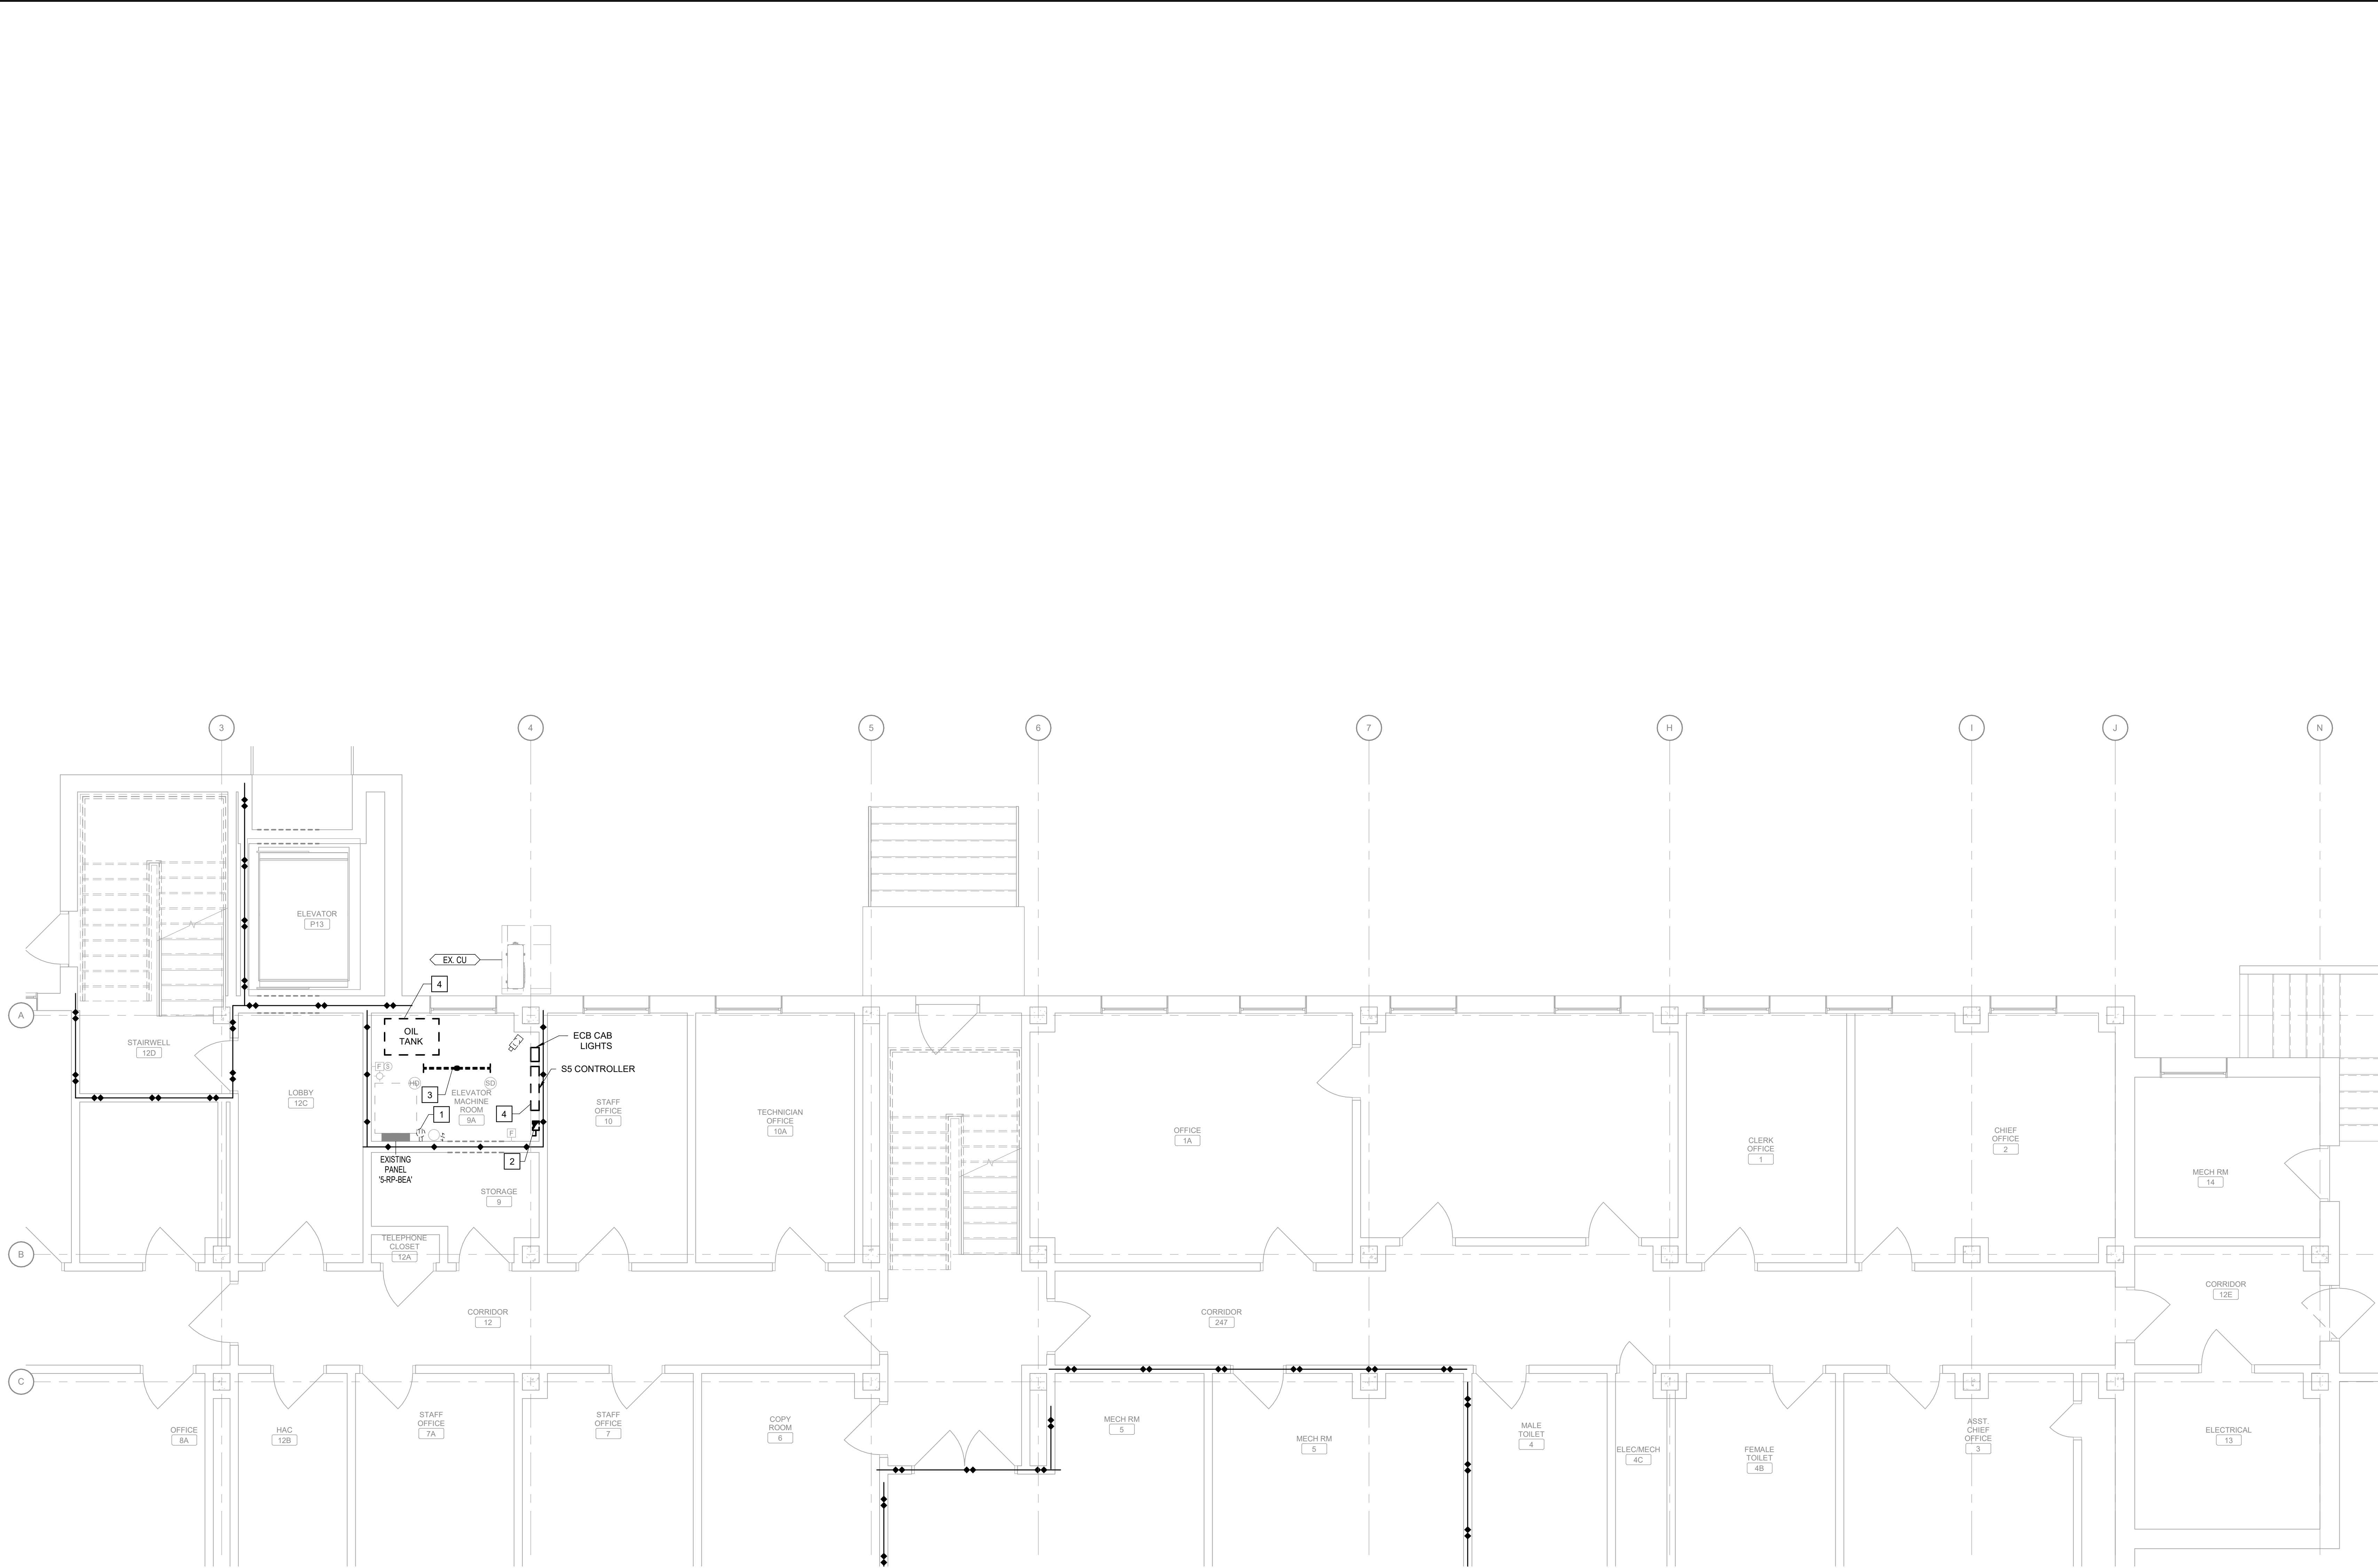

1 BUILDING 5 PARTIAL BASEMENT FLOOR DEMOLITION PLAN - P13
Scale: 1/4" = 1'-0"

SHEET NOTES:

- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO DEMOLITION, THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED, UNLESS NOTED OTHERWISE.
- E. ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.


KEY NOTES:

- 1 EXISTING RECEPTACLES ARE TO BE DEMOLISHED AND REPLACED WITH NEW GFI RECEPTACLES.
- 2 EXISTING 70A DISCONNECT TO BE REPLACED WITH NEW 70A 3-POLE LOCKABLE ENCLOSED SHUNT TRIP BREAKER. SHUNT TRIP POWER TO BE FROM EXISTING PANEL '5-RP-BEA'.
- 3 EXISTING LIGHTING AND SWITCH TO BE DEMOLISHED AND REPLACED.
- 4 EXISTING EQUIPMENT TO BE DEMOLISHED AND REPLACED.

KEY PLAN

SCALE: NO SCALE

AREA OF WORK

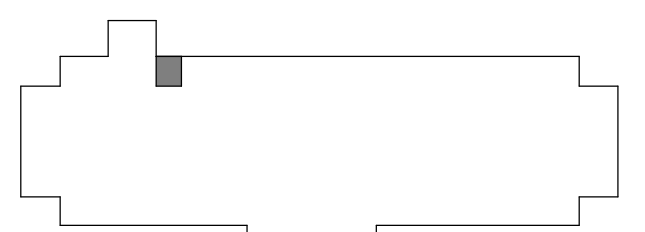


WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

**FULLY SPRINKLERED
100% BID DOCUMENTS**

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

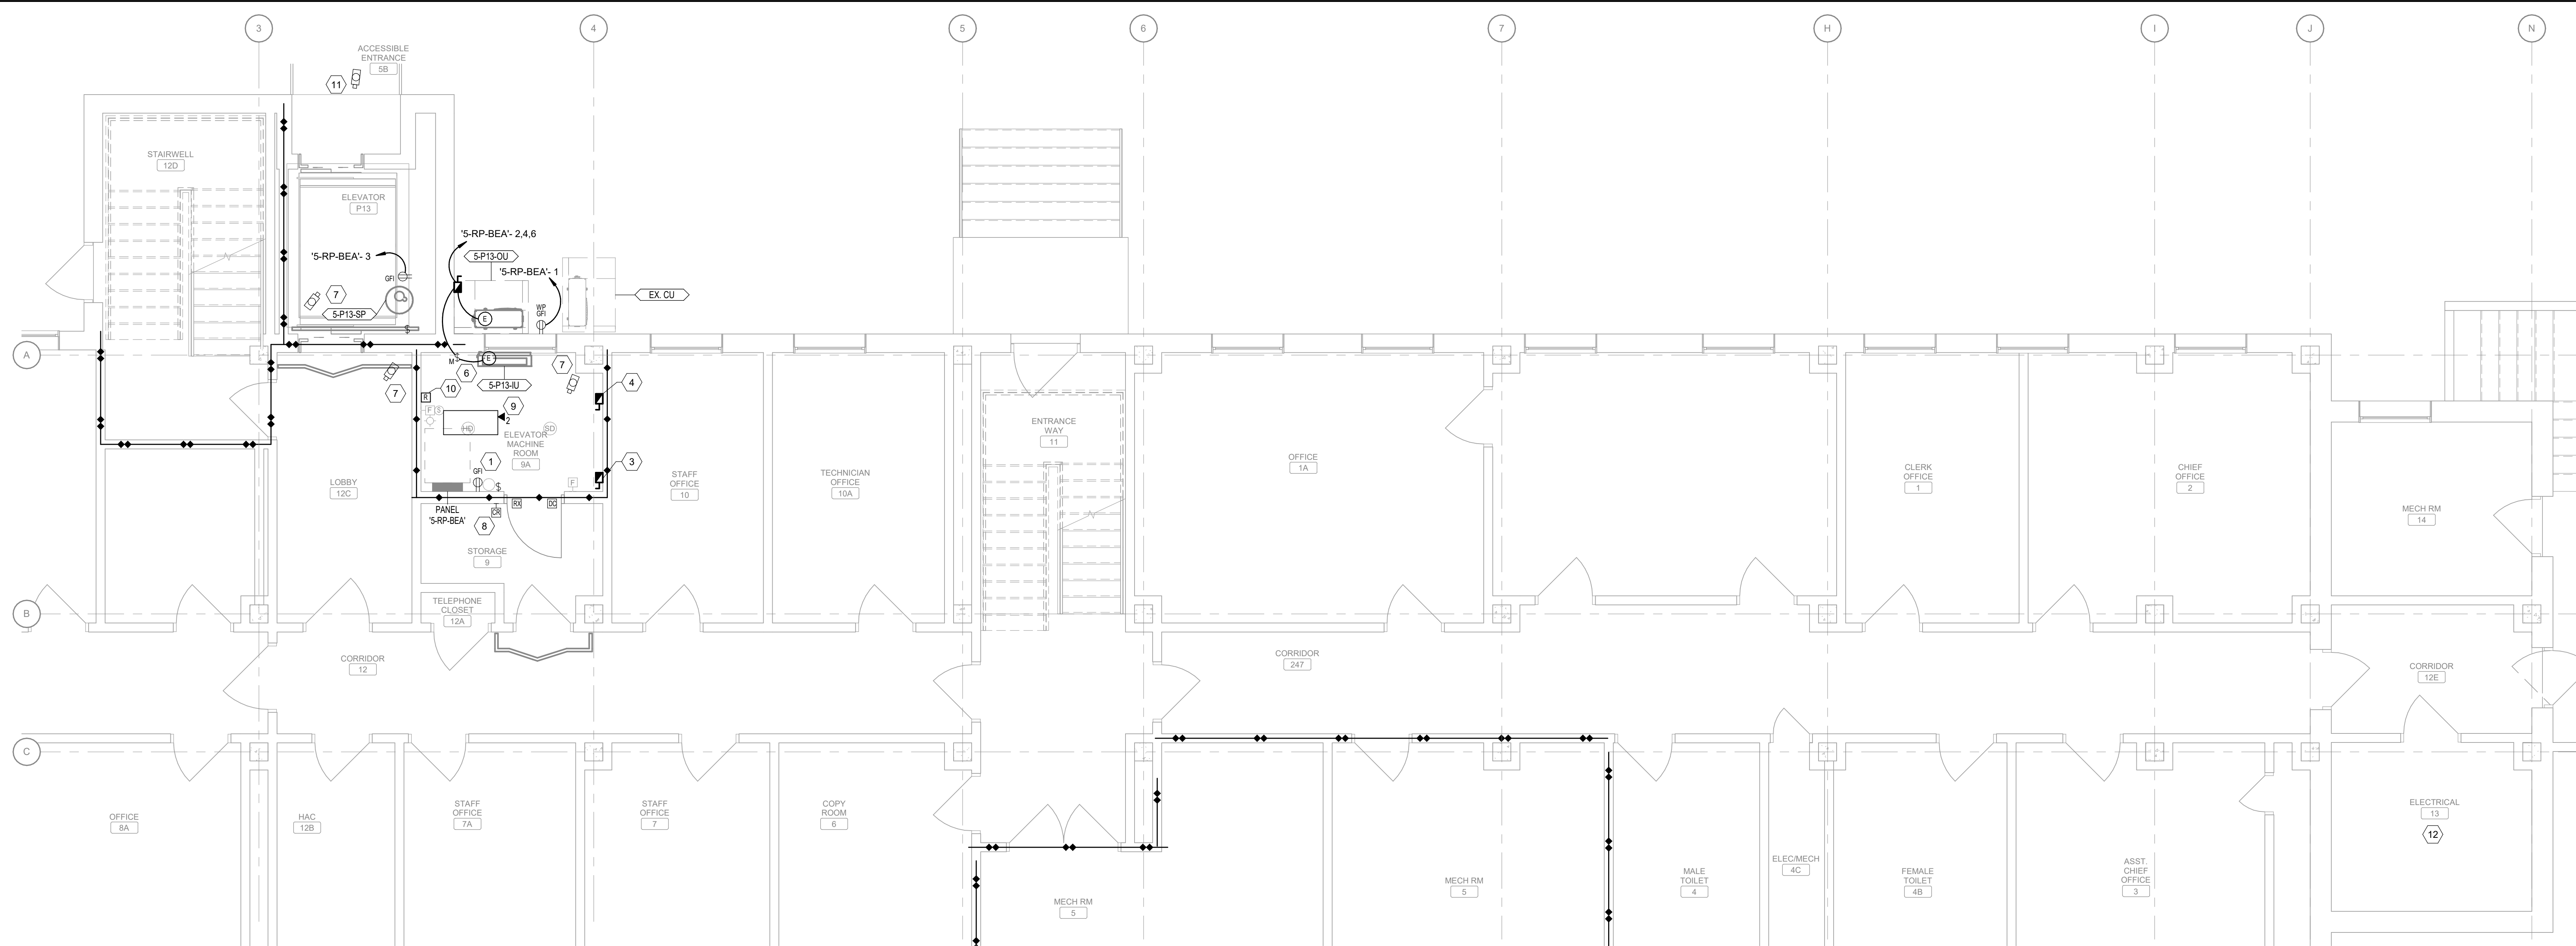

1 BUILDING 5 PARTIAL BASEMENT FLOOR AND ELEVATOR PIT POWER PLAN - P13
Scale: 1/4" = 1'-0"

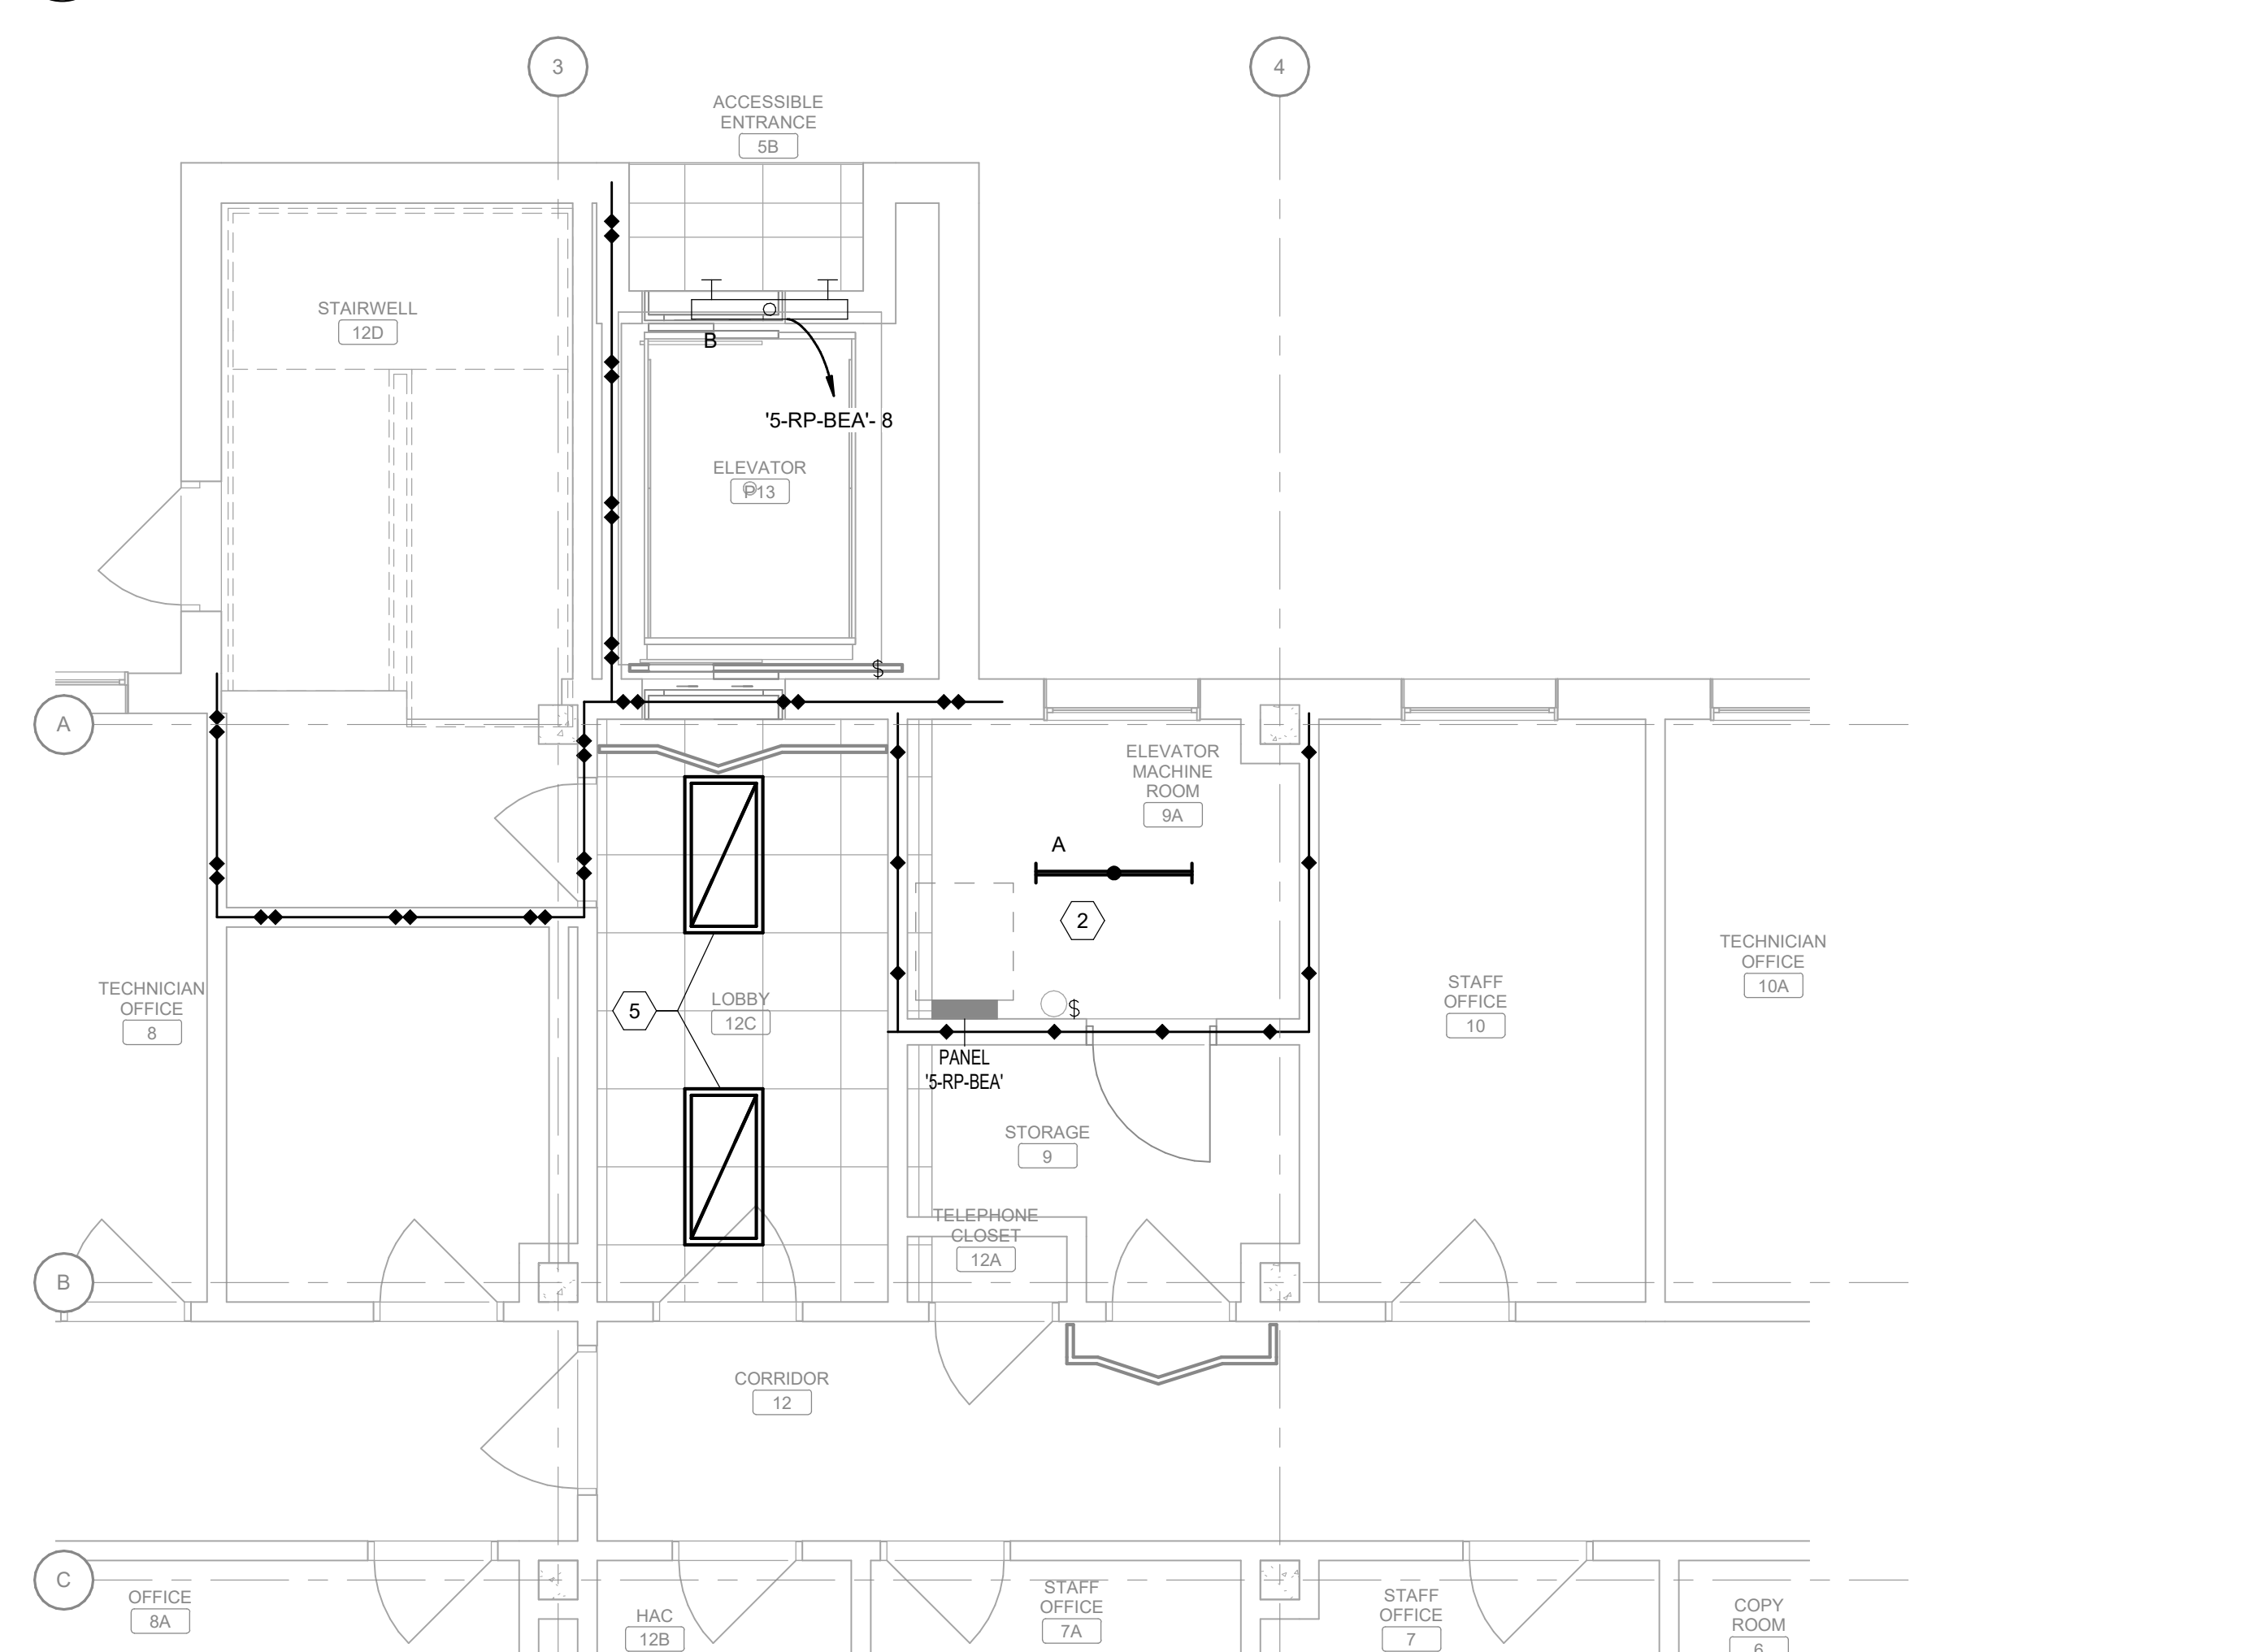

2 BUILDING 5 PARTIAL BASEMENT FLOOR AND ELEVATOR PIT LIGHTING PLAN - P13
Scale: 1/4" = 1'-0"

SHEET NOTES:


- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT IDENTIFICATION TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO THE RATING, THE RATED SURFACE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH WASTE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED UNLESS NOT OTHERWISE SPECIFIED.
- E. ALL DEVICES SHOWN WITH THIN GREY LINES ARE EXISTING TO REMAIN.

KEY NOTES:

- 1 NEW GFI RECEPTACLES TO REPLACE EXISTING OF THE SAME TYPE. RE-CONNECT TO EXISTING CIRCUITRY MAINTAINED DURING DEMOLITION
- 2 REMOVE EXISTING FURNACE AND RE-CONNECT TO REPLACE EXISTING. RE-CONNECT TO EXISTING CIRCUITRY MAINTAINED DURING DEMOLITION
- 3 NEW ELEVATOR DISCONNECT TO REPLACE EXISTING. REUSE CIRCUITING.
- 4 ADD NEW 30A/2 POLE, FUSIBLE DISCONNECT SWITCH FOR ELEVATOR CAB LIGHTS. RECURTIFY EXISTING ELEVATOR LIGHT CIRCUIT THROUGH DISCONNECT.
- 5 RELOCATE ONE EXISTING LAY-IN FURNITURE AS SHOWN AND RECONNECT TO EXISTING TO FURNITURE TO MATCH EXISTING AS SHOWN. CONNECT TO EXISTING CIRCUIT AND CONTROLS. MAINTAINED DURING DEMOLITION
- 6 INTERIOR EVAPORATOR IS POWERED BY EXTERIOR CONDENSING UNIT.
- 7 NEW CAMERA TO BE INSTALLED IN ELEVATOR SHAFT. EACH CAMERA TO BE ON MACHINE ROOM. CONNECT NEW CAMERAS TO THE EXISTING CAMERA SYSTEM
- 8 CONNECT NEW CARD READER TO THE EXISTING PAGES.
- 9 PROVIDE TELEPHONE OUTLET AT EACH NEW ENTRANCE. RUN NEW 22 GAUT 6A TO NEAREST TELEPHONE CLOSET. MAKE CONNECTIONS TO REPLACE EXISTING 110 BLOCKS.
- 10 REPLACE EXISTING TELEPHONE RELAY MODULES WITH NEW.
- 11 NEW CAMERA TO BE INSTALLED AND MOUNTED TO EXTERIOR WALL. 12 ABOVE FINISHED FLOOR. MAKE CONNECTION TO CAMERAS TO THE EXISTING CAMERA SYSTEM.
- 12 EXISTING ATS IS LOCATED IN ROOM 13. ROUTE NEW CONTROL WIRING TO CAMERAS TO PRE-TRANSFER, POST-TRANSFER AND RUNNING ON GENERATOR STATUS FROM THE EXISTING TRANSFER NEW GFI TO THE NEW GFI

KEY PLAN

SCALE: NO SCALE

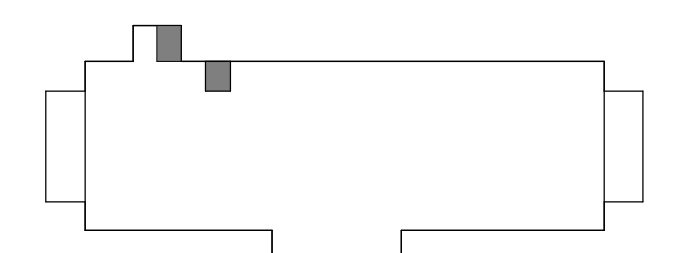

WALL RATING LEGEND

- 
- 1 HR - FIRE SEPARATION
 2 HR - FIRE SEPARATION
 SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

[illegible]

SHEET NOTES:


- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO DEMOLITION, THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED, UNLESS NOTED OTHERWISE.
- E. ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.

KEY NOTES:

- 1 EXISTING RECEPTACLES ARE TO BE DEMOLISHED AND REPLACED WITH NEW GFI RECEPTACLES.
- 2 ALL PANELS ARE EXISTING TO REMAIN.
- 3 ALL EXISTING LIGHT FIXTURES AND SWITCHES ARE TO BE DEMOLISHED AND REPLACED. MAINTAIN EXISTING CIRCUITING FOR NEW LIGHT FIXTURES AND SWITCHES.
- 4 ALL EQUIPMENT DRAWN IN DASHED LINES IS EXISTING TO BE DEMOLISHED.

KEY PLAN

SCALE: NO SCALE

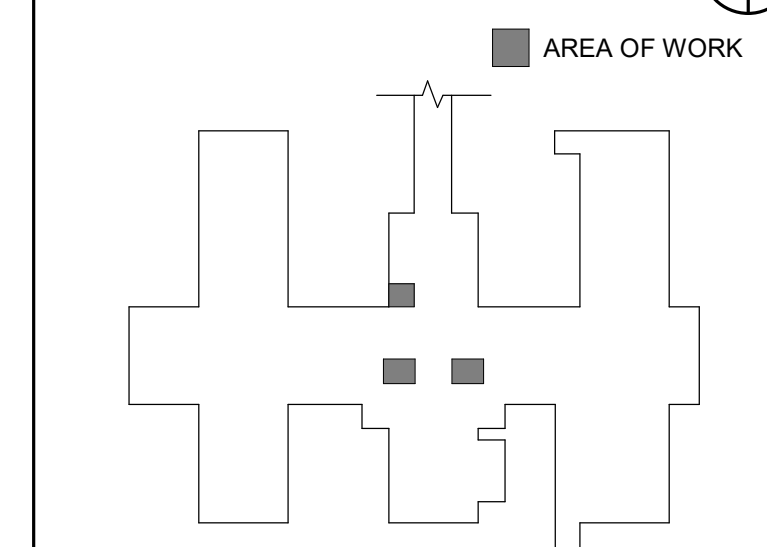


WALL RATING LEGEND


- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS


2 BUILDING 38 PARTIAL BASEMENT LIGHTING DEMOLITION PLAN - P6 & P7
Scale: 1/4" = 1'-0"

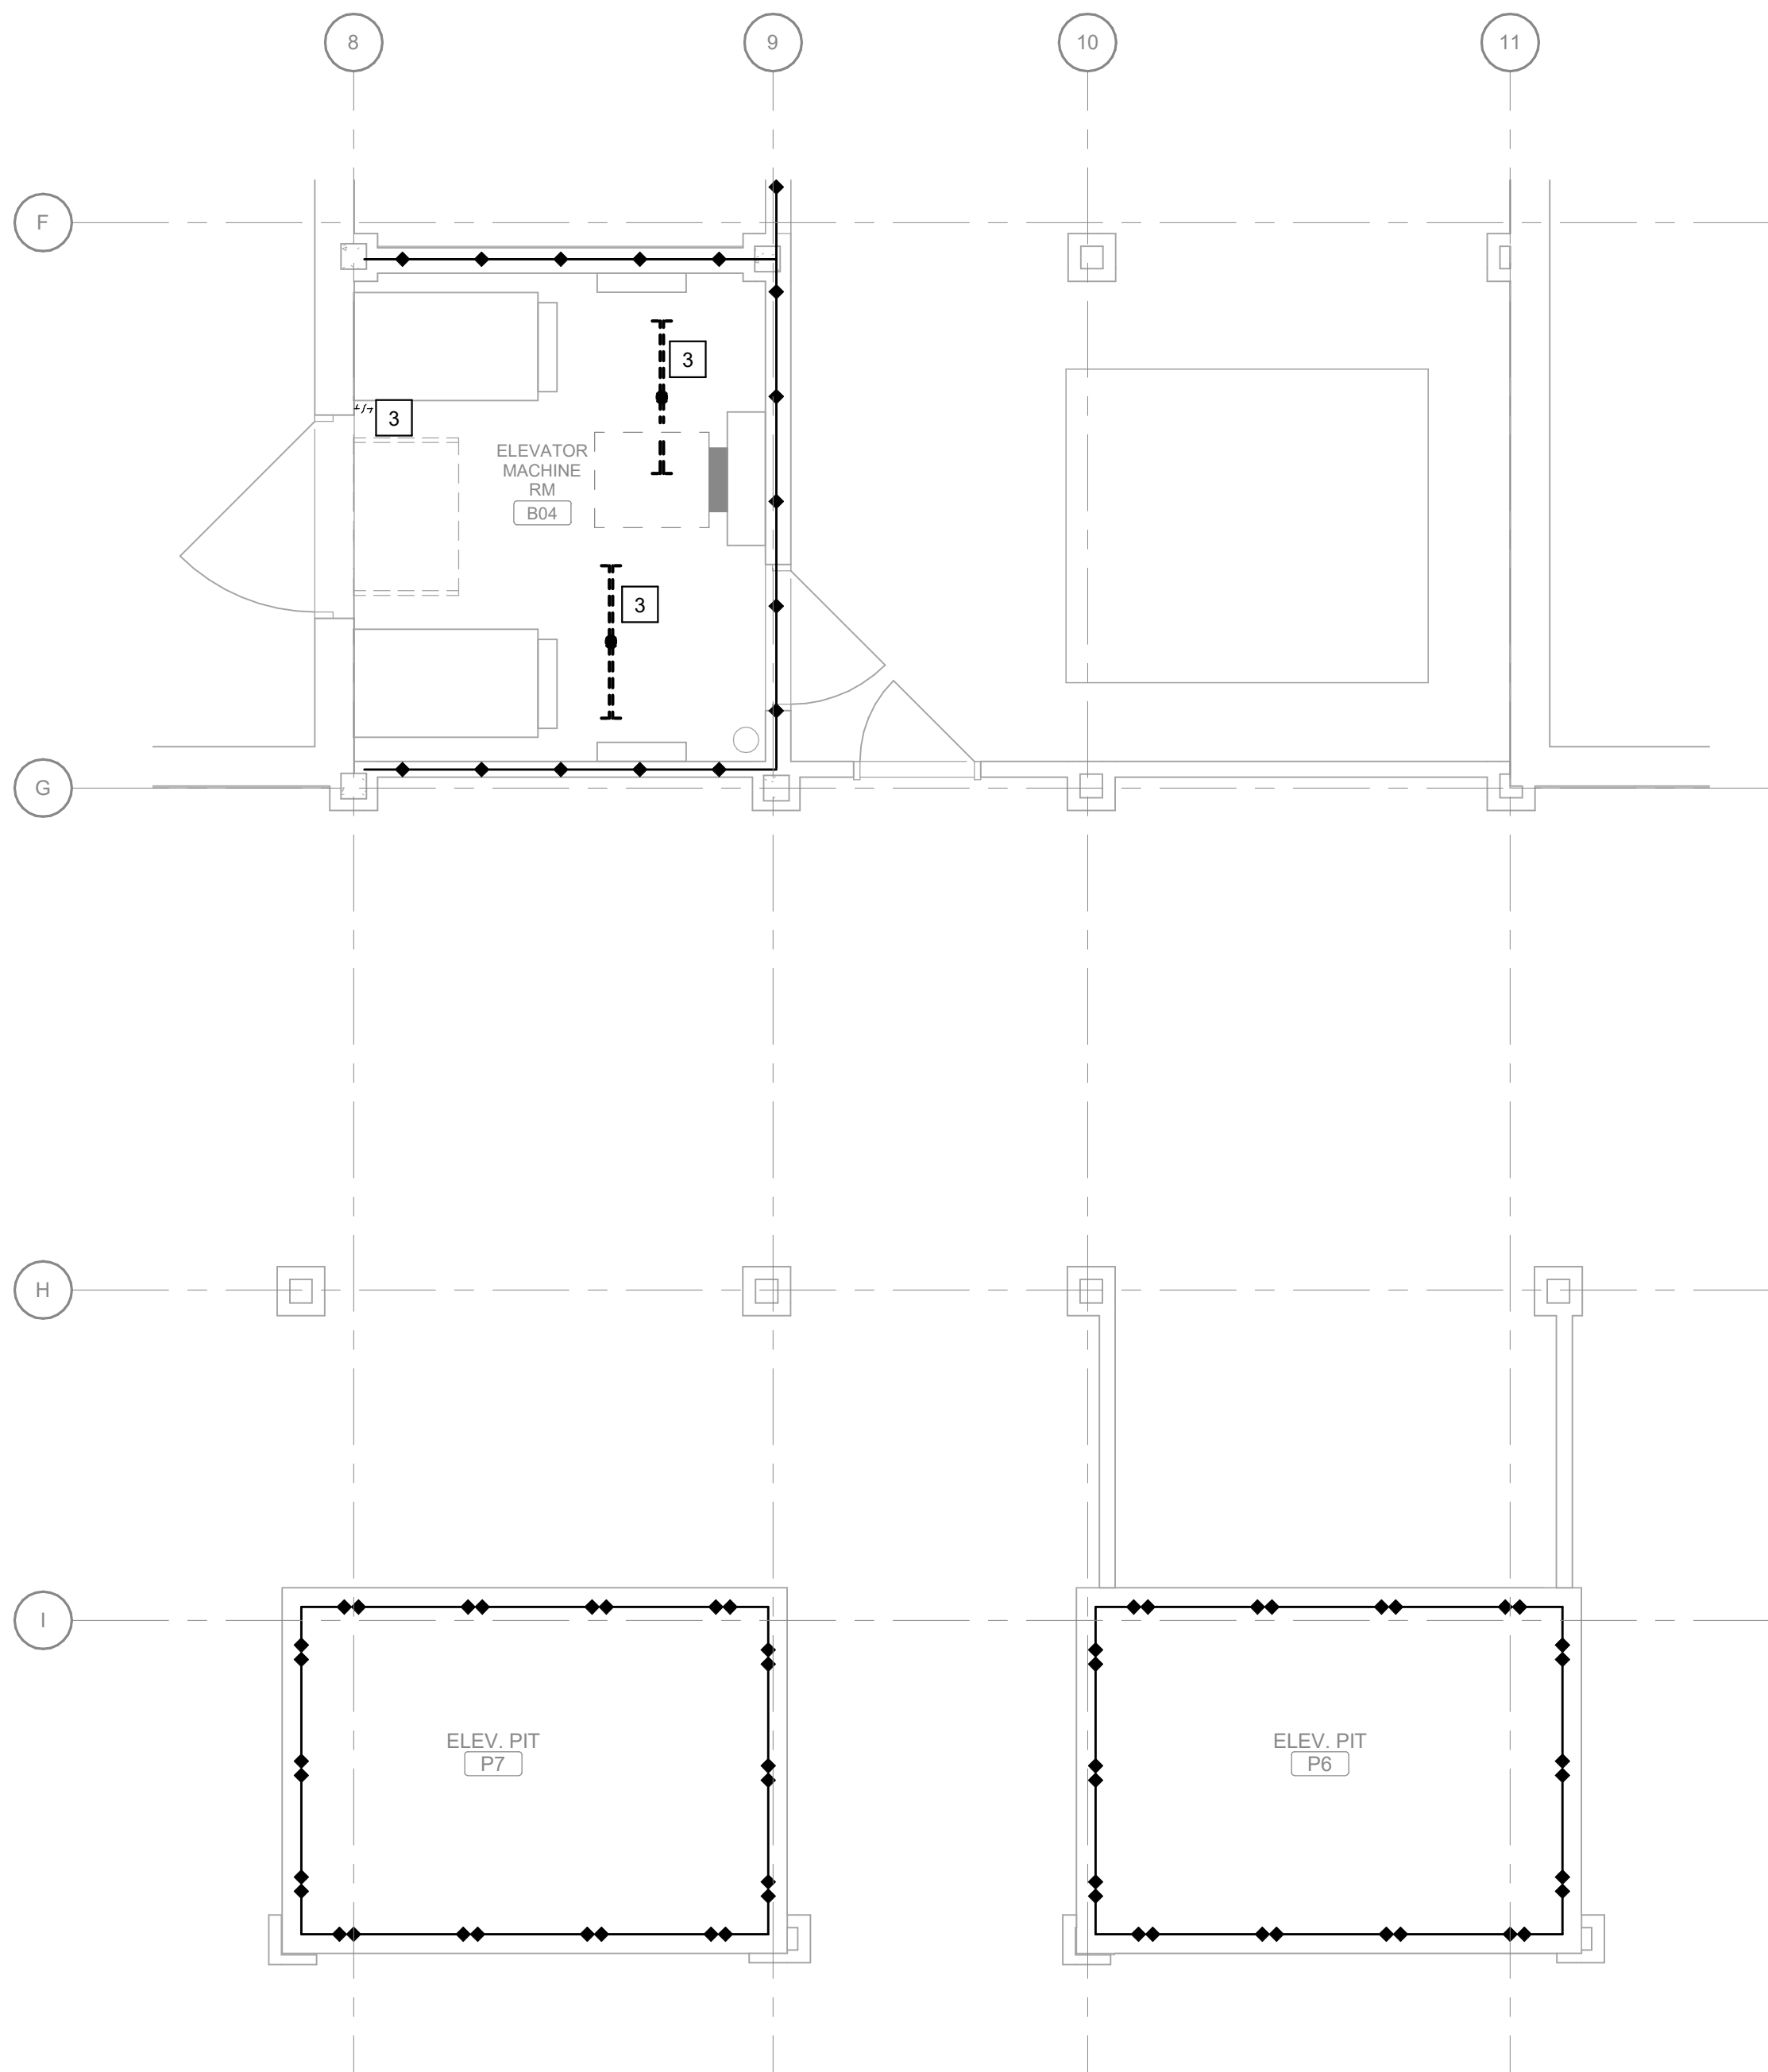

1 BUILDING 38 PARTIAL BASEMENT ELECTRICAL DEMOLITION PLAN - P6 & P7
Scale: 1/4" = 1'-0"

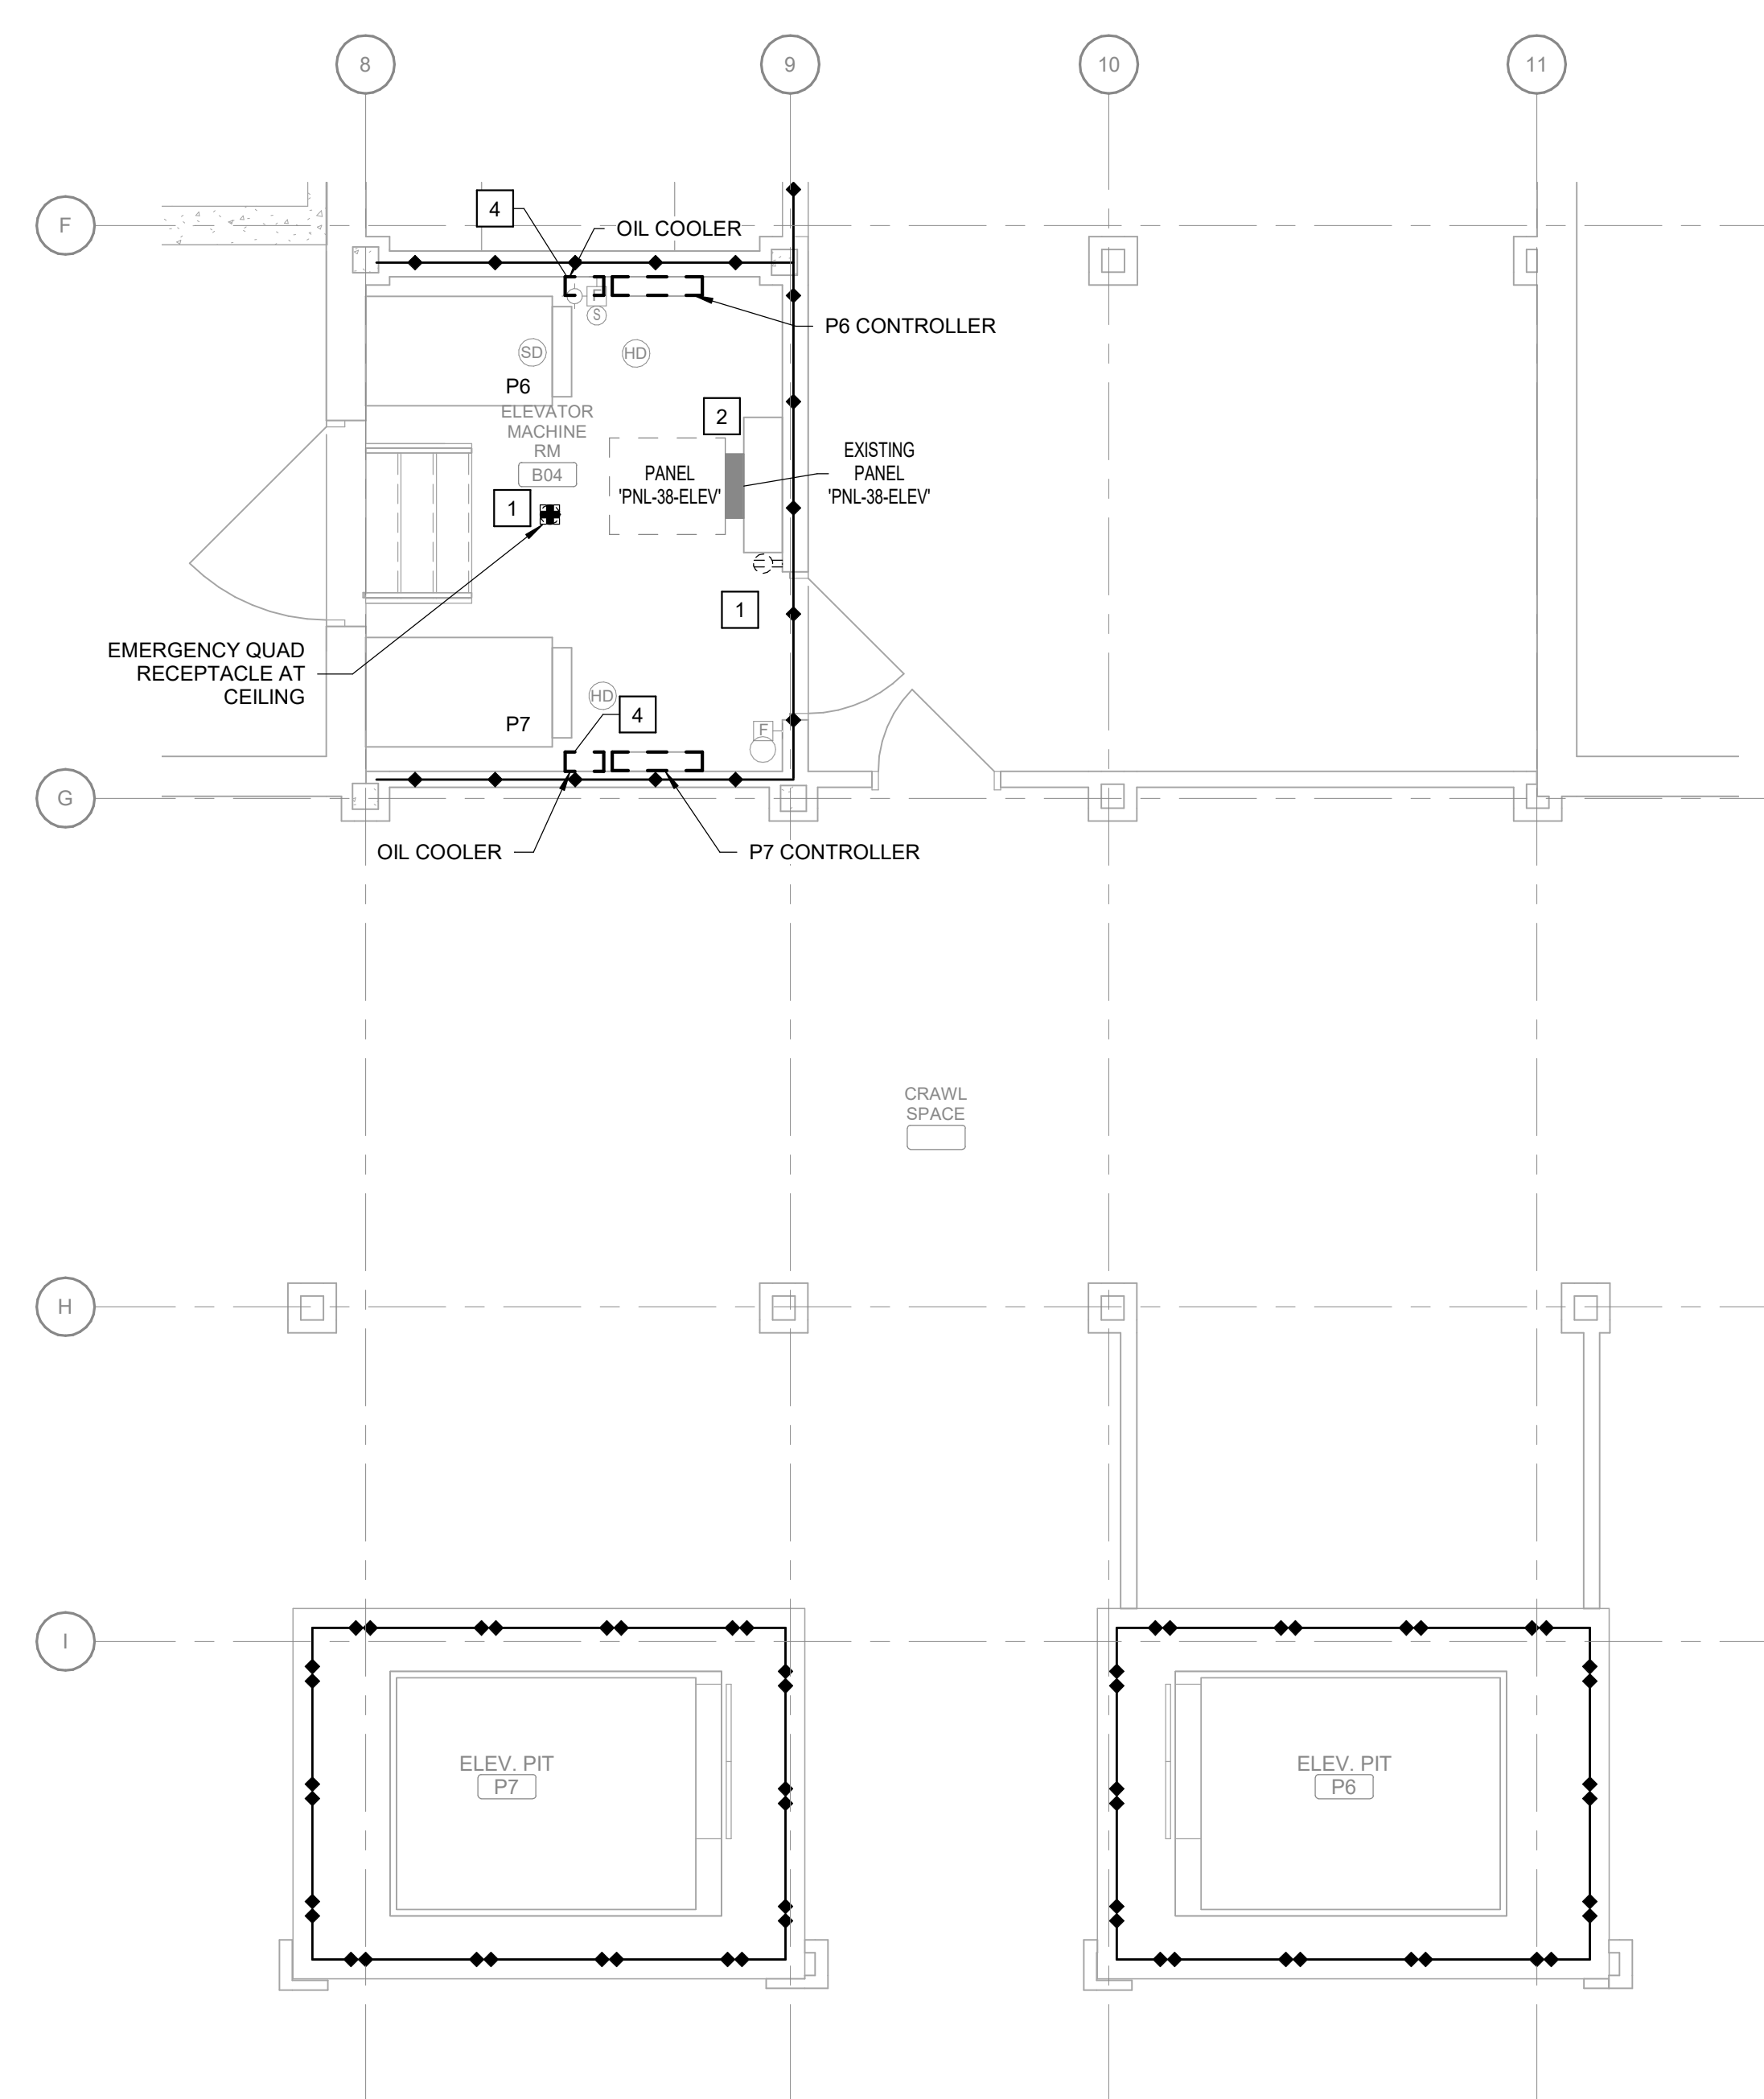

CONSULTANTS:

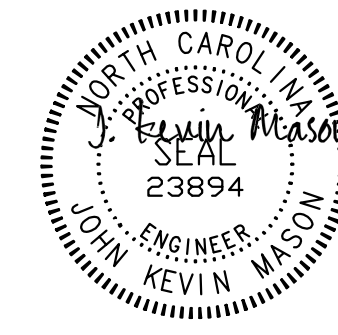

PROJECT MANAGER

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of
Construction
and Facilities
Management



Drawing Title
**BUILDING 38 PARTIAL BASEMENT
ELECTRICAL DEMOLITION PLANS - P6,
P7**

Location
TUSCALOOSA VAMC, VISN 7

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**

Approved
Date
FEBRUARY 6, 2025

Checked
JKM

Drawn
PDN

VA PROJECT NUMBER
679-22-100
Building Number
38
Drawing Number
38.ED101
Dwg 9 of 16

SHEET NOTES:


- CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO DEMOLITION, THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED, UNLESS NOTED OTHERWISE.
- ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.

KEY NOTES:

- NEW GFI RECEPTACLES TO REPLACE EXISTING OF THE SAME TYPE. RE-CONNECT TO EXISTING CIRCUITRY MAINTAINED DURING DEMOLITION.
- NEW LIGHT FIXTURES AND SWITCHES TO REPLACE EXISTING. RE-CONNECT TO EXISTING CIRCUITRY MAINTAINED DURING DEMOLITION.
- NEW CAMERA TO BE INSTALLED IN ELEVATOR CAB, LOBBY (EACH FLOOR), AND MACHINE ROOM. CONNECT NEW CAMERAS TO THE EXISTING CAMERA SYSTEM.
- CONNECT NEW CARD READER TO THE EXISTING PACS.
- PROVIDE TELEPHONE OUTLET AT EACH NEW CONTROLLER. RUN TWO (2) CAT 6A TO NEAREST TELEPHONE CLOSET. MAKE CONNECTIONS TO EXISTING SPARE 110 BLOCKS.
- REPLACE EXISTING INTERFACE RELAY MODULES WITH NEW.
- NEW FIRE ALARM TEST SWITCH FOR EXISTING DUCT MOUNTED SMOKE DETECTORS. PROVIDE ALL REQUIRED WIRING.
- NEW ELEVATOR DISCONNECT. CONNECT TO EXISTING CIRCUIT.
- NEW ELEVATOR CAB LIGHTS DISCONNECT. CONNECT TO EXISTING CIRCUIT.

KEY PLAN

SCALE: NO SCALE

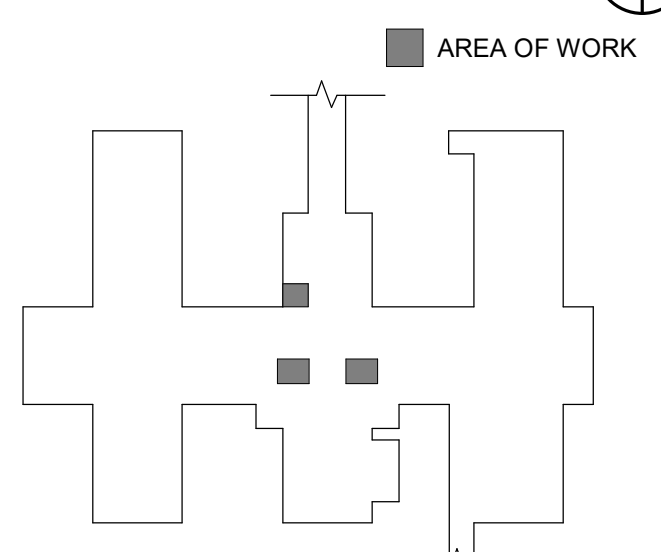

WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED

100% BID DOCUMENTS

PANEL: PNL-38-ELEV				VOLTAGE: 120/208V, 3PH, 4W		MAINS: 400 A MAIN CB		AIC: 10,000 AMPS SYMMETRICAL			
MOUNTING: SURFACE				FED FROM:		LOCATION:		ELEVATOR MACHINE RM.			
ENCLOSURE: NEMA 1				BRANCH:		EXISTING/NEW: Existing					
LOAD NAME	BKR	P	CKT	A (KVA)	B (KVA)	C (KVA)	CKT	P	BKR	LOAD NAME	
SUMP PUMP 38-P6-SP	20 A	1	1	0.48			2	1	20 A	SPARE	
SUMP PUMP 38-P7-SP	20 A	1	3		0.48		4	1	20 A	SPARE	
RCPT ELEV PIT P6	20 A	1	5			0.18	0	6	1	20 A	SPARE
RCPT ELEV PIT P7	20 A	1	7	0.18	0			8	1	20 A	SPARE
SPARE	20 A	1	9		0	0		10	1	20 A	SPARE
SPARE	20 A	1	11			0	0	12	1	20 A	SPARE
SPARE	20 A	1	13	0	0			14	1	20 A	SPARE
SPARE	20 A	1	15		0	0		16	1	20 A	SPARE
SPARE	20 A	1	17			0	0	18	1	20 A	SPARE
SPARE	20 A	1	19	0	0			20	1	20 A	SPARE
SPARE	20 A	1	21		0	0		22	1	20 A	SPARE
SPARE	20 A	1	23			0	0	24	1	20 A	SPARE
SPARE	20 A	1	25	0	0			26	1	20 A	SPARE
SPARE	20 A	1	27		0	0		28	1	20 A	SPARE
SPARE	20 A	1	29			0	0	30	1	20 A	SPARE
SPARE	20 A	1	31	0	0			32	1	20 A	SPARE
SPARE	20 A	1	33		0	0		34	1	20 A	SPARE
SPARE	20 A	1	35			0	0	36	1	20 A	SPARE
SPARE	20 A	1	37	0	0			38	1	20 A	SPARE
SPARE	20 A	1	39		0	0		40	1	20 A	SPARE
SPARE	20 A	1	41			0	0	42	1	20 A	SPARE
PER PHASE CONNECTED LOAD:				0.66 kVA	0.48 kVA	0.18 kVA					
LOAD SUMMARY				CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	TOTALS				
RECEPTACLES (GENERAL)				0.36 kVA	100.00%	0.36 kVA					
RECEPTACLES (DEDICATED)				0.96 kVA	100.00%	0.96 kVA					

SHEET NOTES:


- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA OF WORK. DEMOLISH ALL CIRCUITS THAT ARE NO LONGER IN USE. MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY NOT SUBJECT TO DEMOLITION, THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW SITE LOCK-OUT/TAG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES INDICATED WITH HIDDEN LINES ARE TO BE REMOVED, UNLESS NOTED OTHERWISE.
- E. ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.

KEY NOTES:

- 1 ALL EXISTING RECEPTACLES ARE TO BE DEMOLISHED AND REPLACED WITH A NEW GFI RECEPTACLE OF THE SAME TYPE.
- 2 ALL DISCONNECTS ARE EXISTING TO REMAIN.
- 3 ALL PANELS ARE EXISTING TO REMAIN.
- 4 ALL EXISTING LIGHT FIXTURES AND SWITCHES ARE TO BE DEMOLISHED AND REPLACED. MAINTAIN EXISTING CIRCUITING FOR NEW LIGHT FIXTURES AND SWITCHES.
- 5 ALL EXISTING EQUIPMENT DRAWN IN DASHED LINES IS TO BE DEMOLISHED.
- 6 REMOVE EXISTING PIT LIGHTS. MAINTAIN EXISTING CIRCUITING FOR NEW LIGHTING.

KEY PLAN

SCALE: NO SCALE

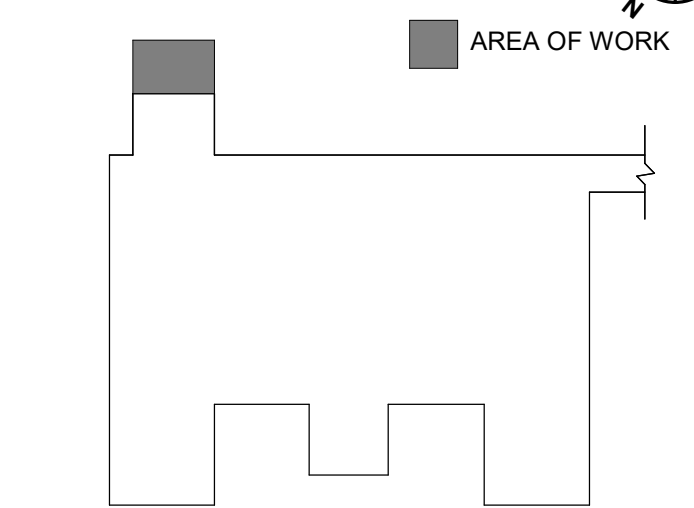


WALL RATING LEGEND

- 1 HR - FIRE SEPARATION
- 2 HR - FIRE SEPARATION
- SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS

PANEL: 135-RP-LS/CR-BEB					VOLTAGE: 120/240V, 1PH, 3W		MAINS:		400 A MAIN CB		AIC: 14,000 AMPS SYMMETRICAL			
MOUNTING: SURFACE					FED FROM:		LOCATION:		ELEVATOR MACHINE ROOM...					
ENCLOSURE: NEMA 1					BRANCH:		EXISTING/NEW:		Existing					
LOAD NAME					B (kVA)		LOAD NAME							
LIGHTS B-01					CKT		P		BKR					
SPARE CIRCUIT IN CEILING B-01					20 A	1	3		0	0	2	1	20 A	LIGHTS IN ELEVATOR PIT
SPARE CIRCUIT IN CEILING B-01					20 A	1	5		0	0	4	1	20 A	RECEPTACLES IN ELEVATOR PIT
ELEVATOR CONTROLS PIT/CAR LIGHTS					20 A	1	7			0	6	1	20 A	EXHAUST FAN EF-16
ELEVATOR CONTROLS PIT/CAR LIGHTS					20 A	1	9		0	0	8	1	20 A	LIGHTING (GENERAL)
SUMP PUMP 135-P14-SP					20 A	1	11			1.14	10	1	20 A	SPARE
SPACE					--	1	13	--	2.34	--	14	2	30 A	135-P14POU,IU SPLIT SYSTEM
SPACE					--	1	15	--	--	--	16	1	--	SPACE
SPACE					--	1	17	--	--	--	18	1	--	SPACE
SPACE					--	1	19	--	--	--	20	1	--	SPACE
SPACE					--	1	21	--	--	--	22	1	--	SPACE
SPACE					--	1	23	--	--	--	24	1	--	SPACE
SPACE					--	1	25	--	--	--	26	1	--	SPACE
SPACE					--	1	27	--	--	--	28	1	--	SPACE
SPACE					--	1	29	--	--	--	30	1	--	SPACE
SPACE					--	1	31	--	--	--	32	1	--	SPACE
SPACE					--	1	33	--	--	--	34	1	--	SPACE
SPACE					--	1	35	--	--	--	36	1	--	SPACE
SPACE					--	1	37	--	--	--	38	1	--	SPACE
SPACE					--	1	39	--	--	--	40	1	--	SPACE
SPACE					--	1	41	--	--	--	42	1	--	SPACE
PER PHASE CONNECTED LOAD:					2.34 kVA		3.38 kVA							
LOAD SUMMARY					CONNECTED LOAD		DEMAND FACTOR		DEMAND LOAD		TOTALS			
MOTOR/HVAC					5.48 kVA		124.31%		6.81 kVA					
RECEPTACLES (GENERAL)					0.18 kVA		100.00%		0.18 kVA					
LIGHTING (GENERAL)					0.07 kVA		125.00%		0.08 kVA					

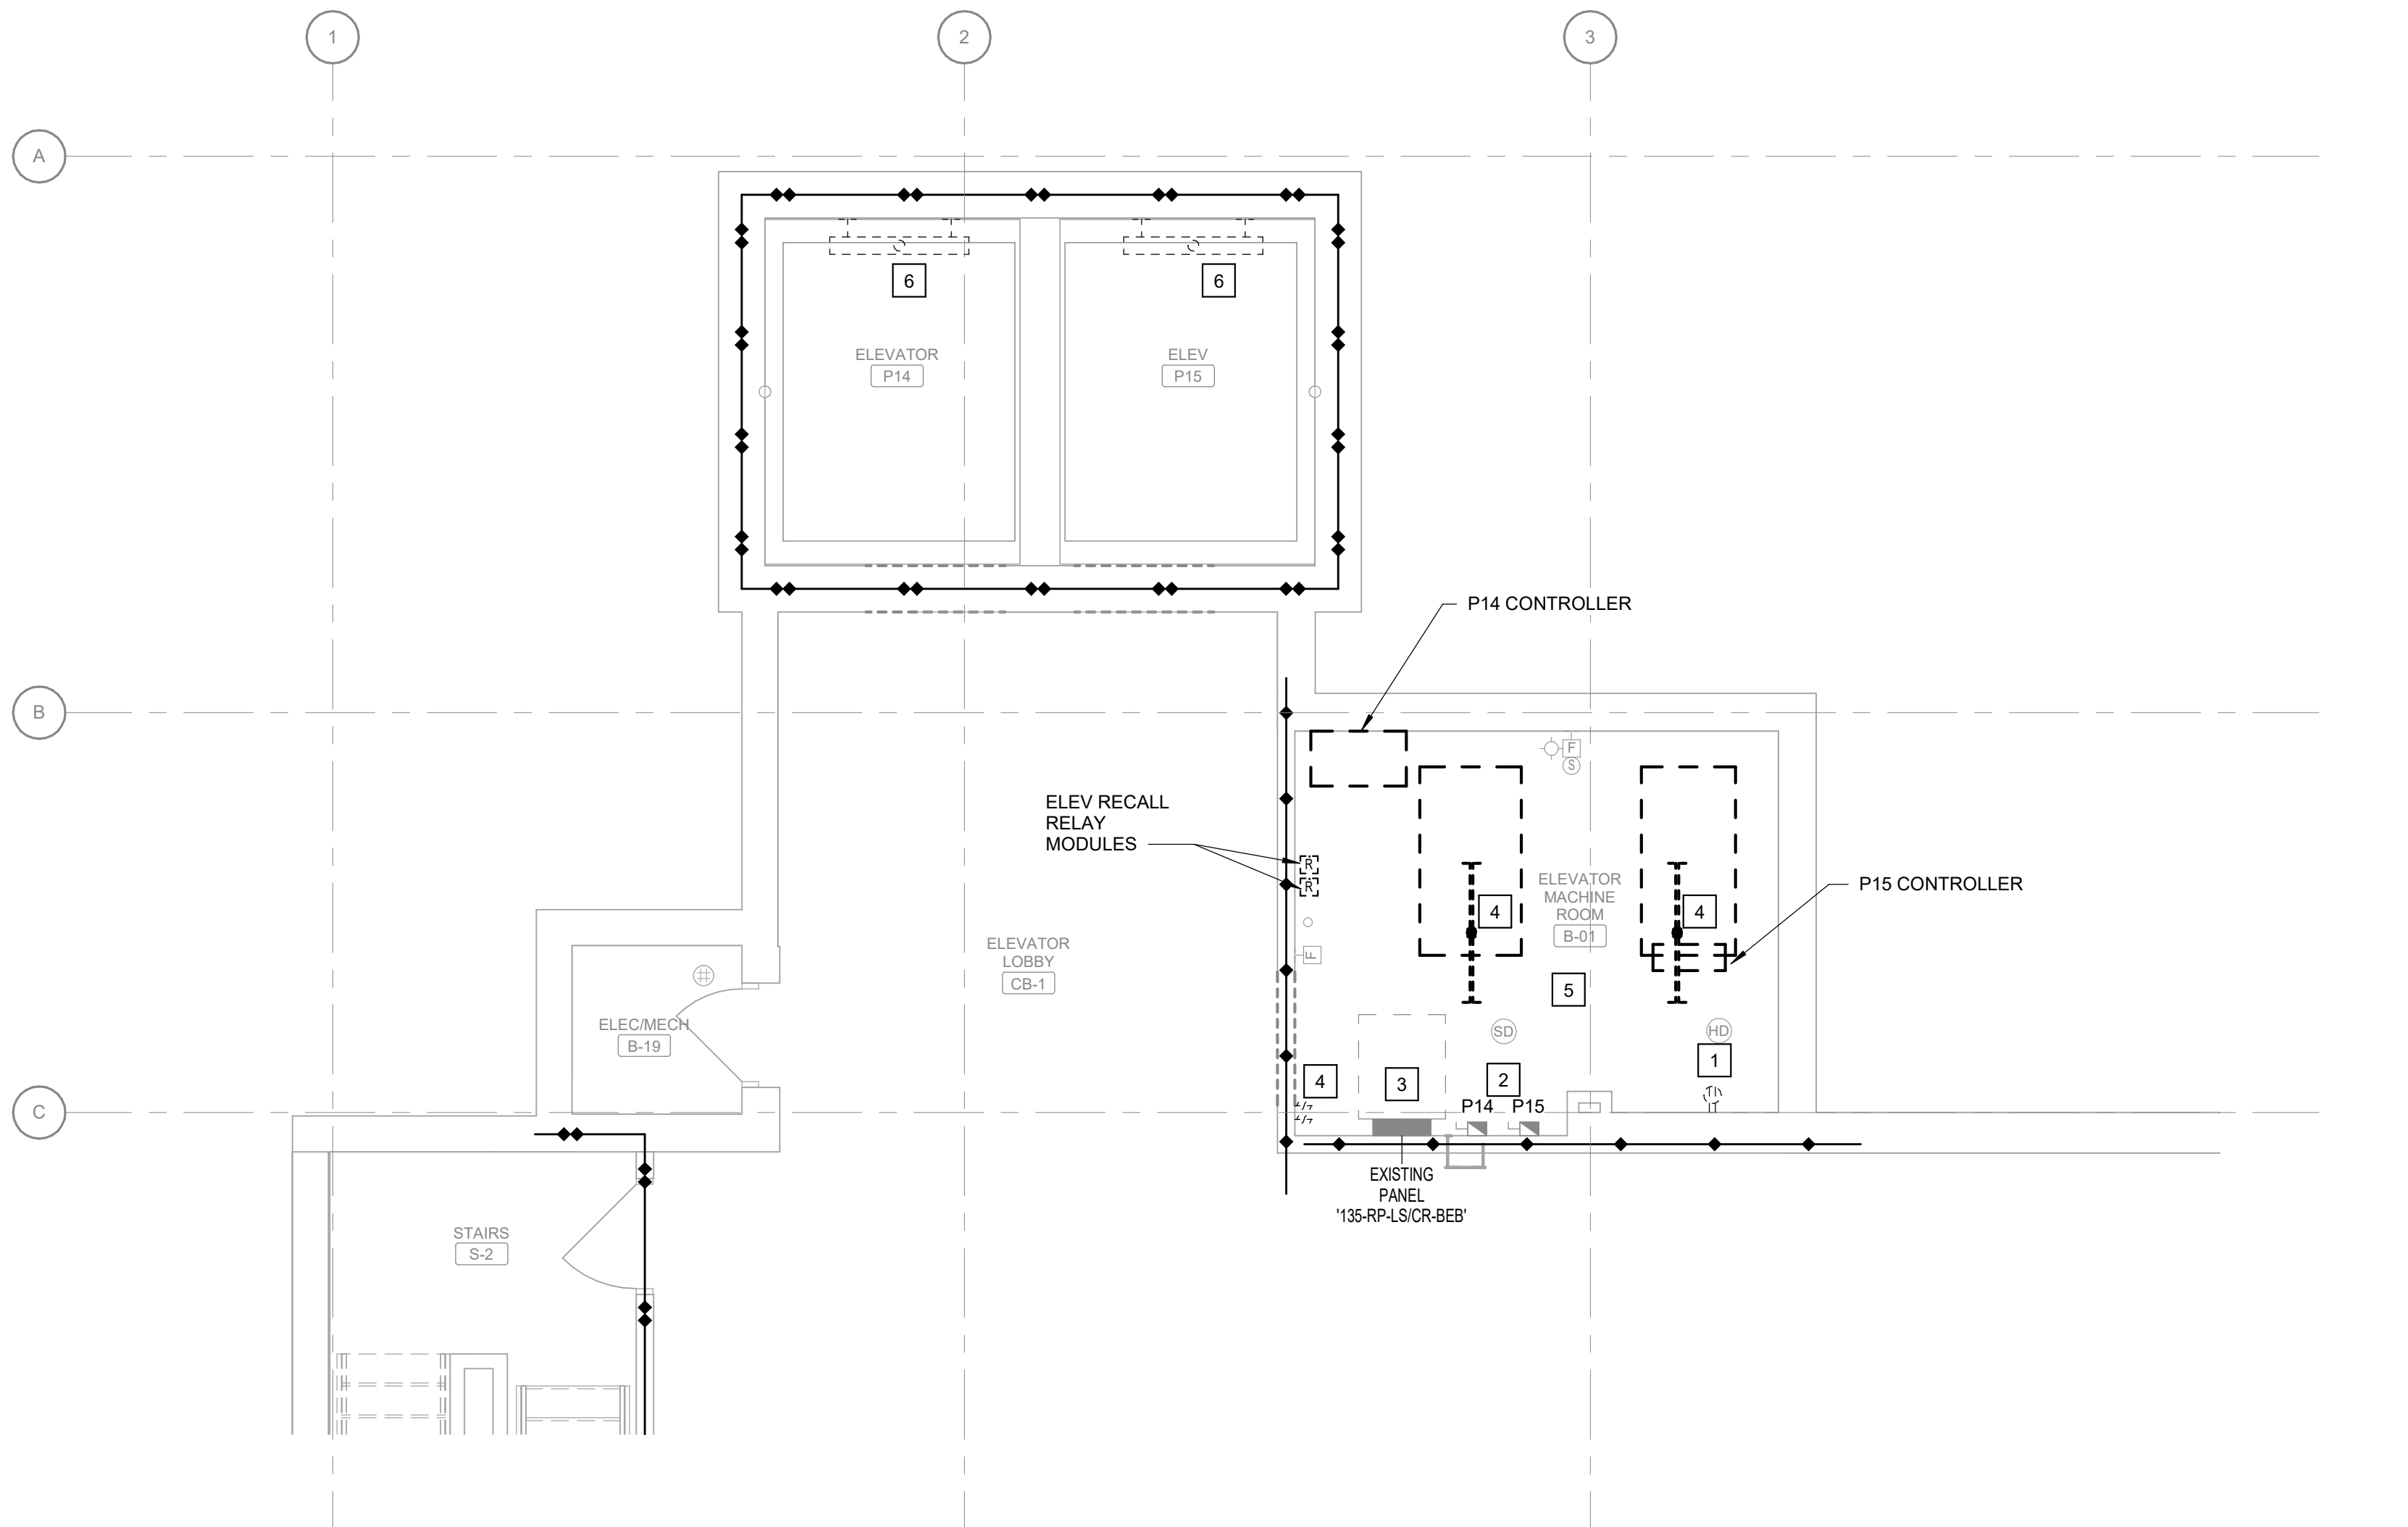

1 BUILDING 135 PARTIAL BASEMENT ELECTRICAL DEMOLITION PLAN - P14, P15
Scale: 1/4" = 1'-0"



CONSULTANTS:



Michael Blades & Associates, Ltd
Elevator and Escalator Consulting


James V. Enkel
BICS ID # 230762
EXPIRES 12-31-27
2/5/2025


KEVIN MASON
23894
2/5/2025

PROJECT MANAGER
ACG Project Number 21-344



APOGEE
Engineers | Architects
© COPYRIGHT Apogee Consulting Group, P.A.

Headquarters:
Apogee Consulting Group, P.A.
1151 Kildaire Farm Road, Suite 120
Cary, North Carolina 27511
www.acg-pa.com 919-858-7420

Office of
Construction
and Facilities
Management

 U.S. Department
of Veterans Affairs

Drawing Title
**BUILDING 135 PARTIAL BASEMENT
ELECTRICAL DEMOLITION PLAN - P14,
P15**

Location
TUSCALOOSA VAMC, VISN 7

Project Title
**ELEVATOR UPGRADES IN
BUILDINGS 1, 2, 5, 38, 135 &
137**

Approved

Date
FEBRUARY 6, 2025

Checked
JKM

Drawn
PDN

VA PROJECT NUMBER
679-22-100

Building Number
135


Drawing Number
135.ED101

Dwg 11 of 16


133.EF 101

Dwg. 12 of 16

[illegible]

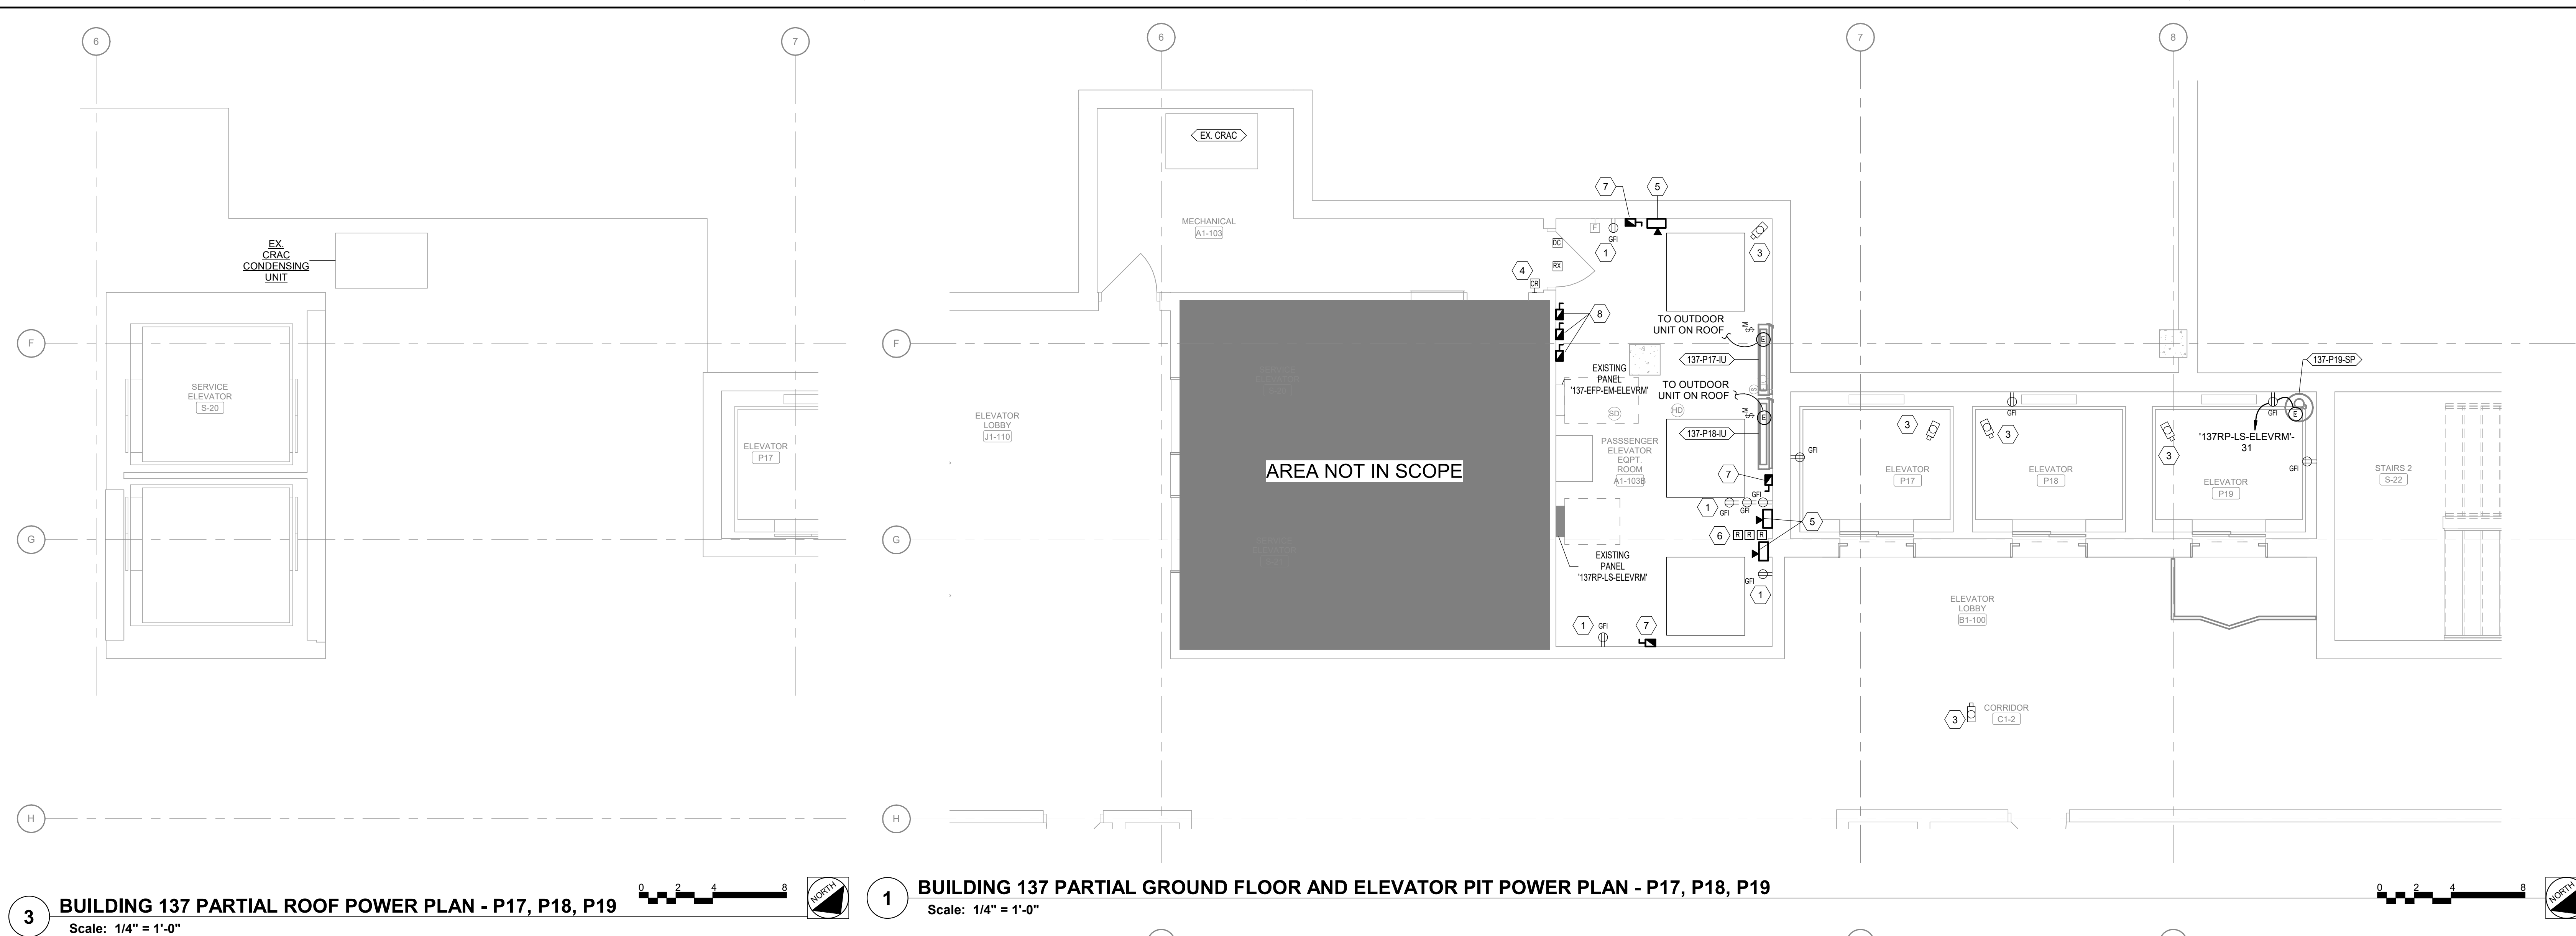

1 BUILDING 137 PARTIAL GROUND FLOOR AND ELEVATOR PIT POWER PLAN - P17, P18, P19
Scale: 1/4" = 1'-0"

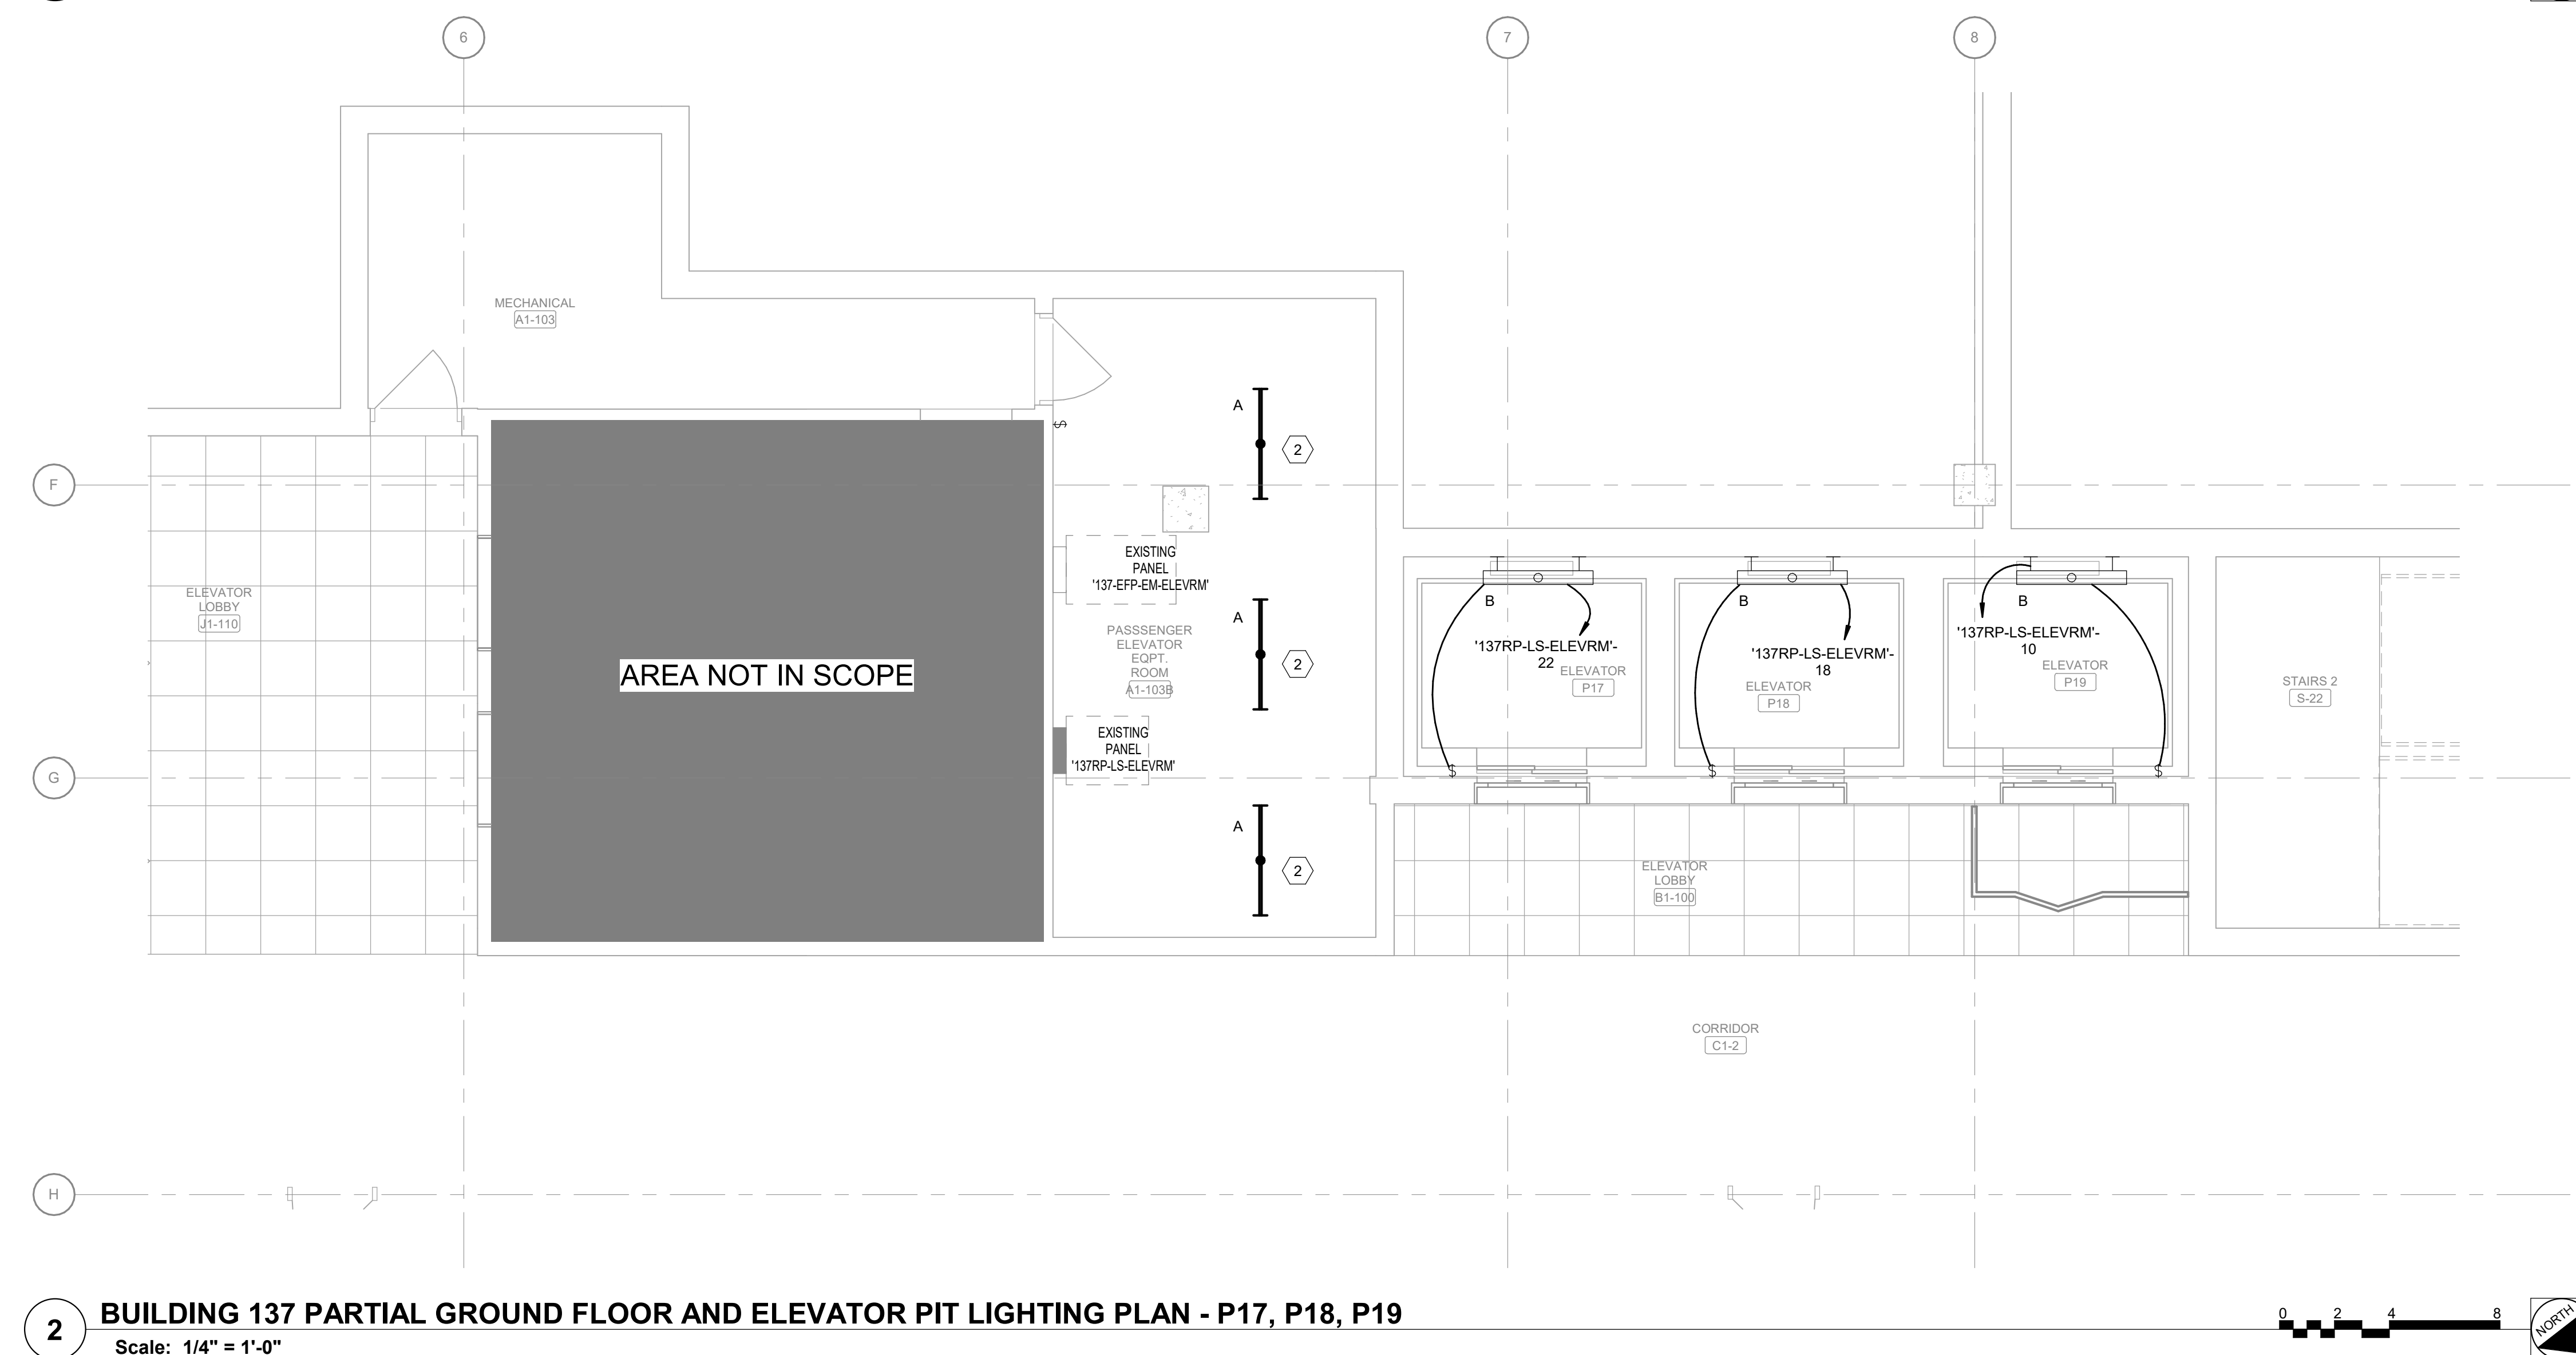

2 BUILDING 137 PARTIAL GROUND FLOOR AND ELEVATOR PIT LIGHTING PLAN - P17, P18, P19
Scale: 1/4" = 1'-0"

SHEET NOTES:


- A. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACING AND IDENTIFYING ALL CIRCUITS AND CONDUITS THAT ORIGINATE, PASS THROUGH, OR TERMINATE IN THE AREA TO BE DEMOLISHED. ALL CIRCUITS THAT ARE NO LONGER IN USE, MAINTAIN CIRCUIT CONTINUITY TO ALL CIRCUITS WITH WHICH ARE NOT COMPLETELY REMOVED.
- B. WHERE CONDUIT IS REMOVED FROM AN EXISTING RATED ASSEMBLY, IT IS NOT SUBJECT TO DEMOLITION. THE REMAINING HOLE SHALL BE PATCHED/REPAIRED TO MAINTAIN THE RATING OF THE ASSEMBLY.
- C. ELECTRICAL CONTRACTOR SHALL FOLLOW THE LOCAL PLUGG-OUT GUIDELINES TO DEENERGIZE EQUIPMENT.
- D. ELECTRICAL CONTRACTOR TO COORDINATE WITH SITE MANAGER FOR DISPOSAL OF REMOVED ELECTRICAL EQUIPMENT. DEVICES LOCATED WITHIN HAZARDOUS AREAS SHALL BE REMOVED, UNLESS NOTED OTHERWISE.
- E. ALL DEVICES SHOWN WITH THIN GRAY LINES ARE EXISTING TO REMAIN.

KEY NOTES:

- 1 NEW GFI RECEPTABLES TO REPLACE EXISTING OF THE SAME TYPE. RE-CONNECT TO EXISTING CIRCUITRY MAINTAINED DURING DEMOLITION.
- 2 NEW LIGHT FIXTURES AND SWITCHES TO REPLACE EXISTING DOWN TO EXISTING CIRCUITRY MAINTAINED DURING DEMOLITION.
- 3 NEW CAMERA TO BE INSTALLED IN ELEVATOR CAB LOBBY (EACH FLOOR), AND MACHINE ROOM. CONNECT NEW CAMERAS TO THE EXISTING CAMERA SYSTEM.
- 4 CONNECT NEW CARD READER TO THE EXISTING PAGES
- 5 PROVIDE TELEPHONE OUTLET AT EACH NEW CONTROLLER. RUN TWO (2) CAT 6A TO NEAREST TELEPHONE CLOSING CONNECTIONS TO EXISTING SPARE 110 BLOCKS
- 6 REPLACE EXISTING INTERFERENCE RELAY MODULES WITH NEW.
- 7 NEW 3P-100A 480V DISCONNECT FOR ELEVATOR. CONNECT TO EXISTING ELEVATOR CIRCUIT. COORDINATE AVAILABLE MOUNTING SPACE WITH COR.
- 8 NEW 1P-20A 120V DISCONNECTS FOR ELEVATOR CAB LIGHTS. CONNECT TO EXISTING ELEVATOR CAB LIGHTING CIRCUIT. ONE FOR EACH ELEVATOR. COORDINATE AVAILABLE MOUNTING SPACE WITH COR.

KEY PLAN

SCALE: NO SCALE

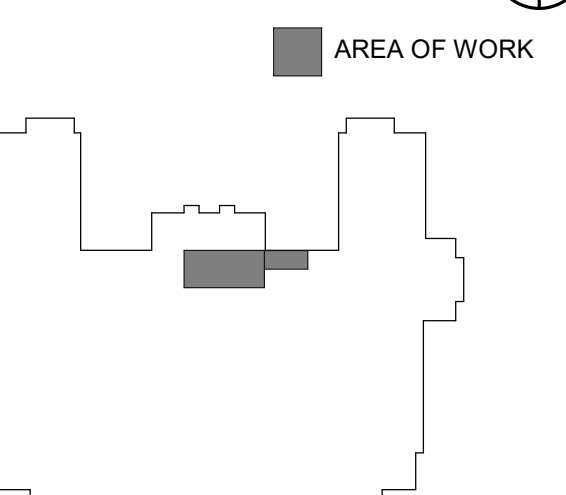


WALL RATING LEGEND


-  1 HR - FIRE SEPARATION
 2 HR - FIRE SEPARATION
 SMOKE RESISTIVE HAZARDOUS AREA

FULLY SPRINKLERED
100% BID DOCUMENTS


[illegible]

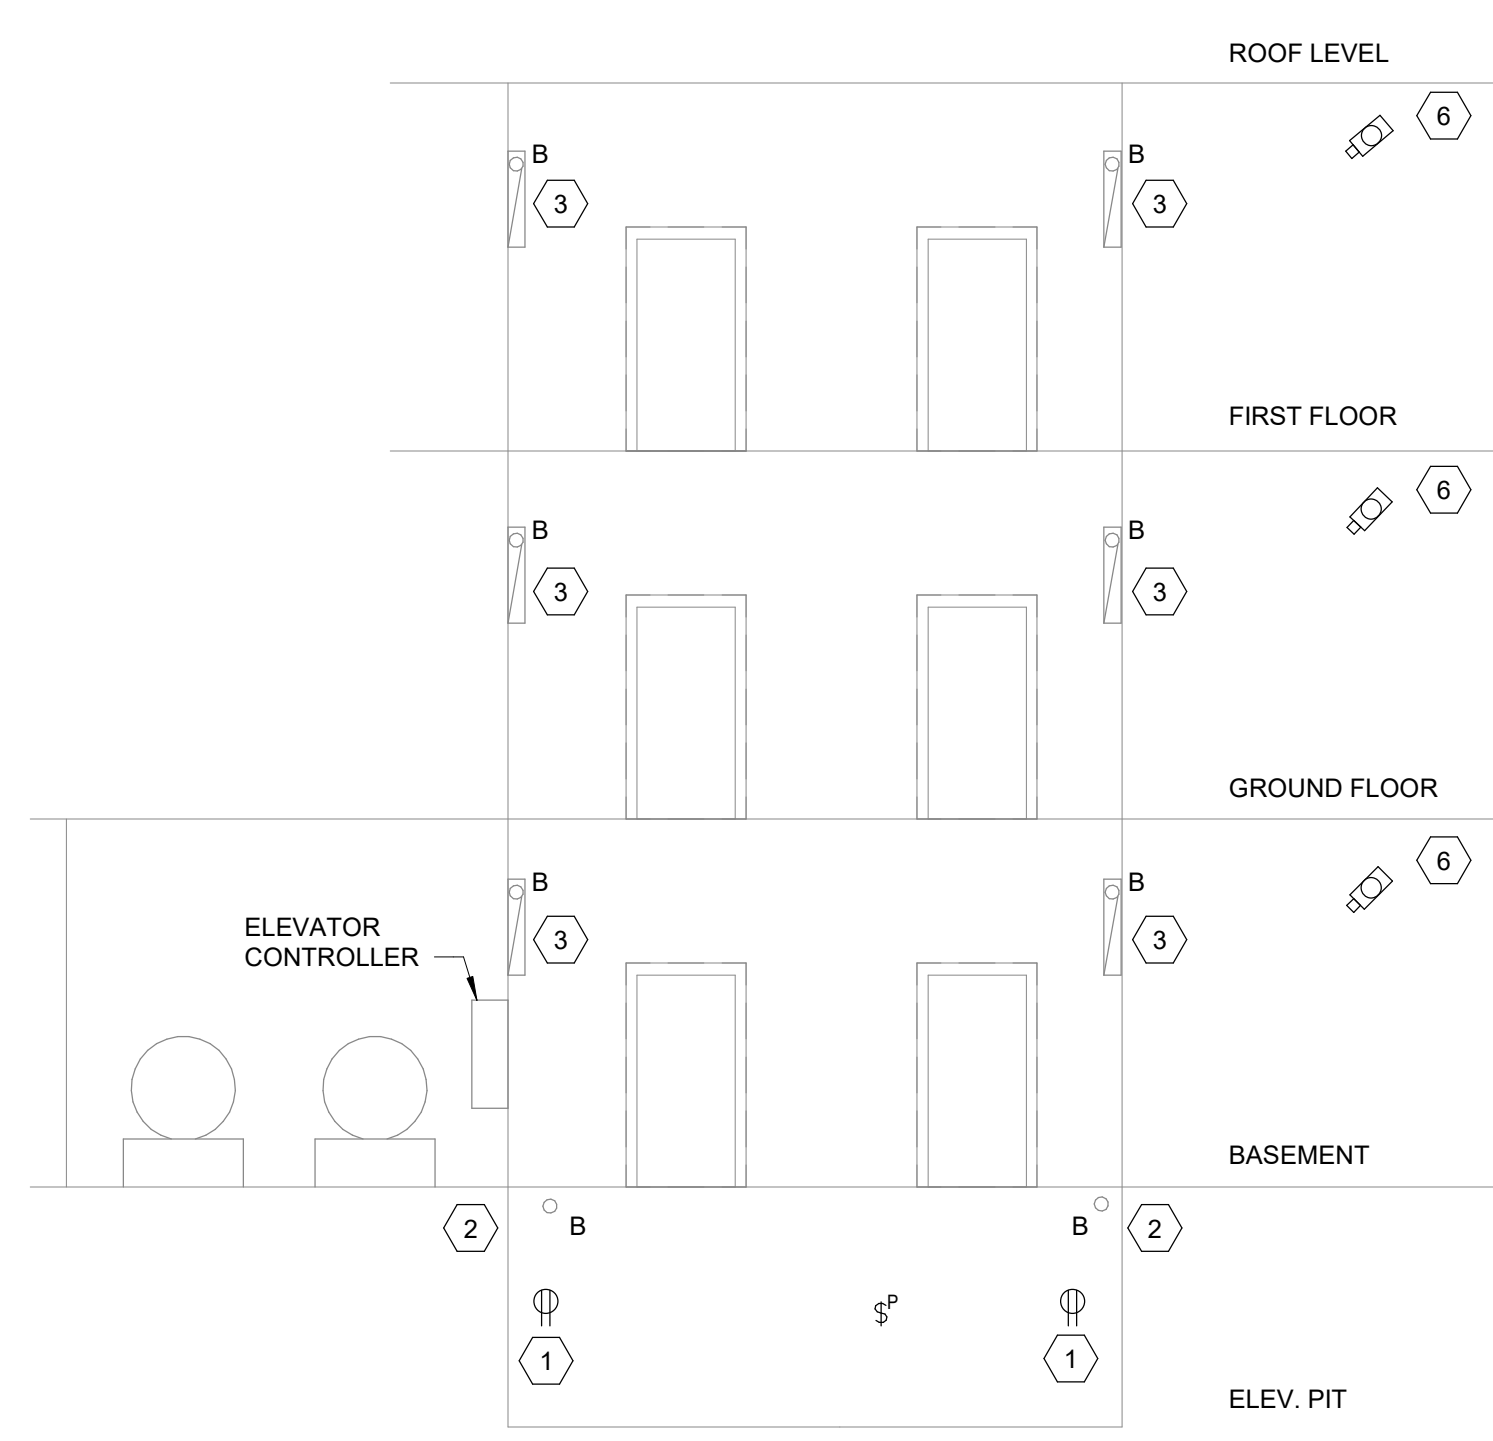


ELEVATORS -
P14 & P15
BUILDING 135

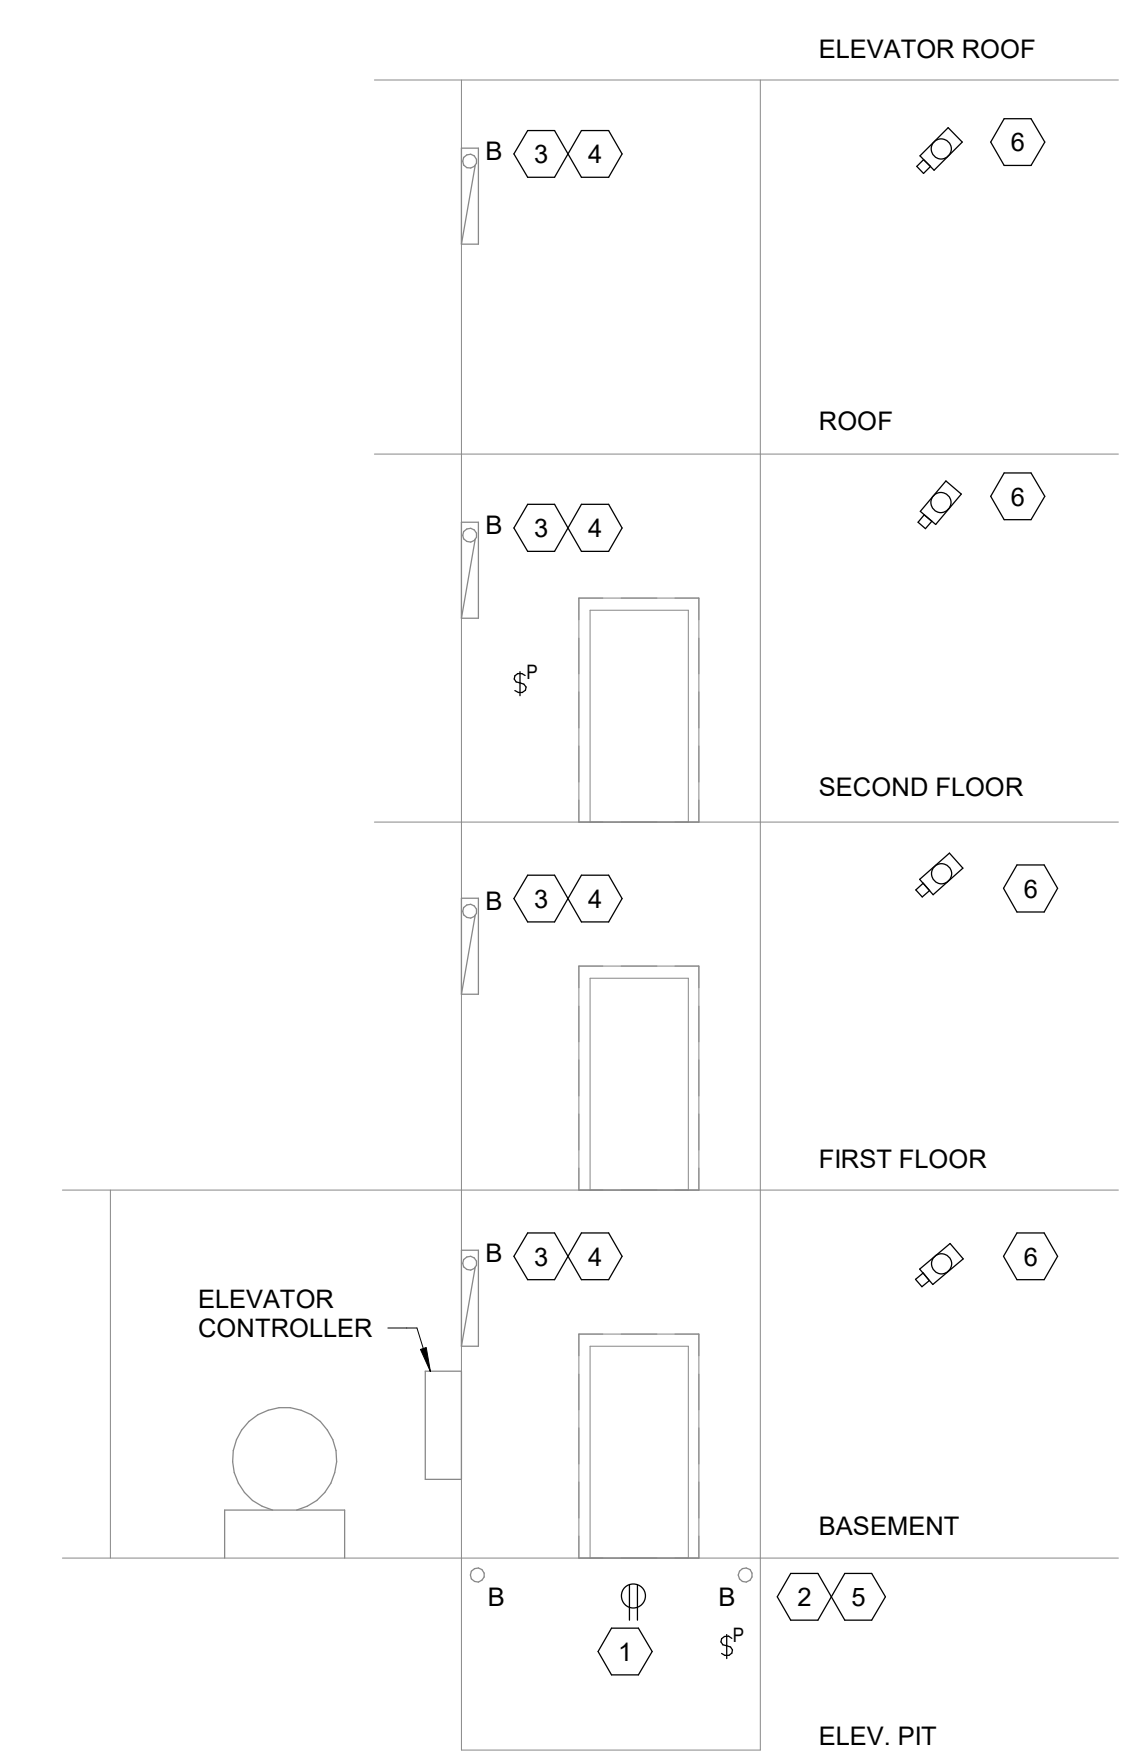


ELEVATOR -
P13
BUILDING 5

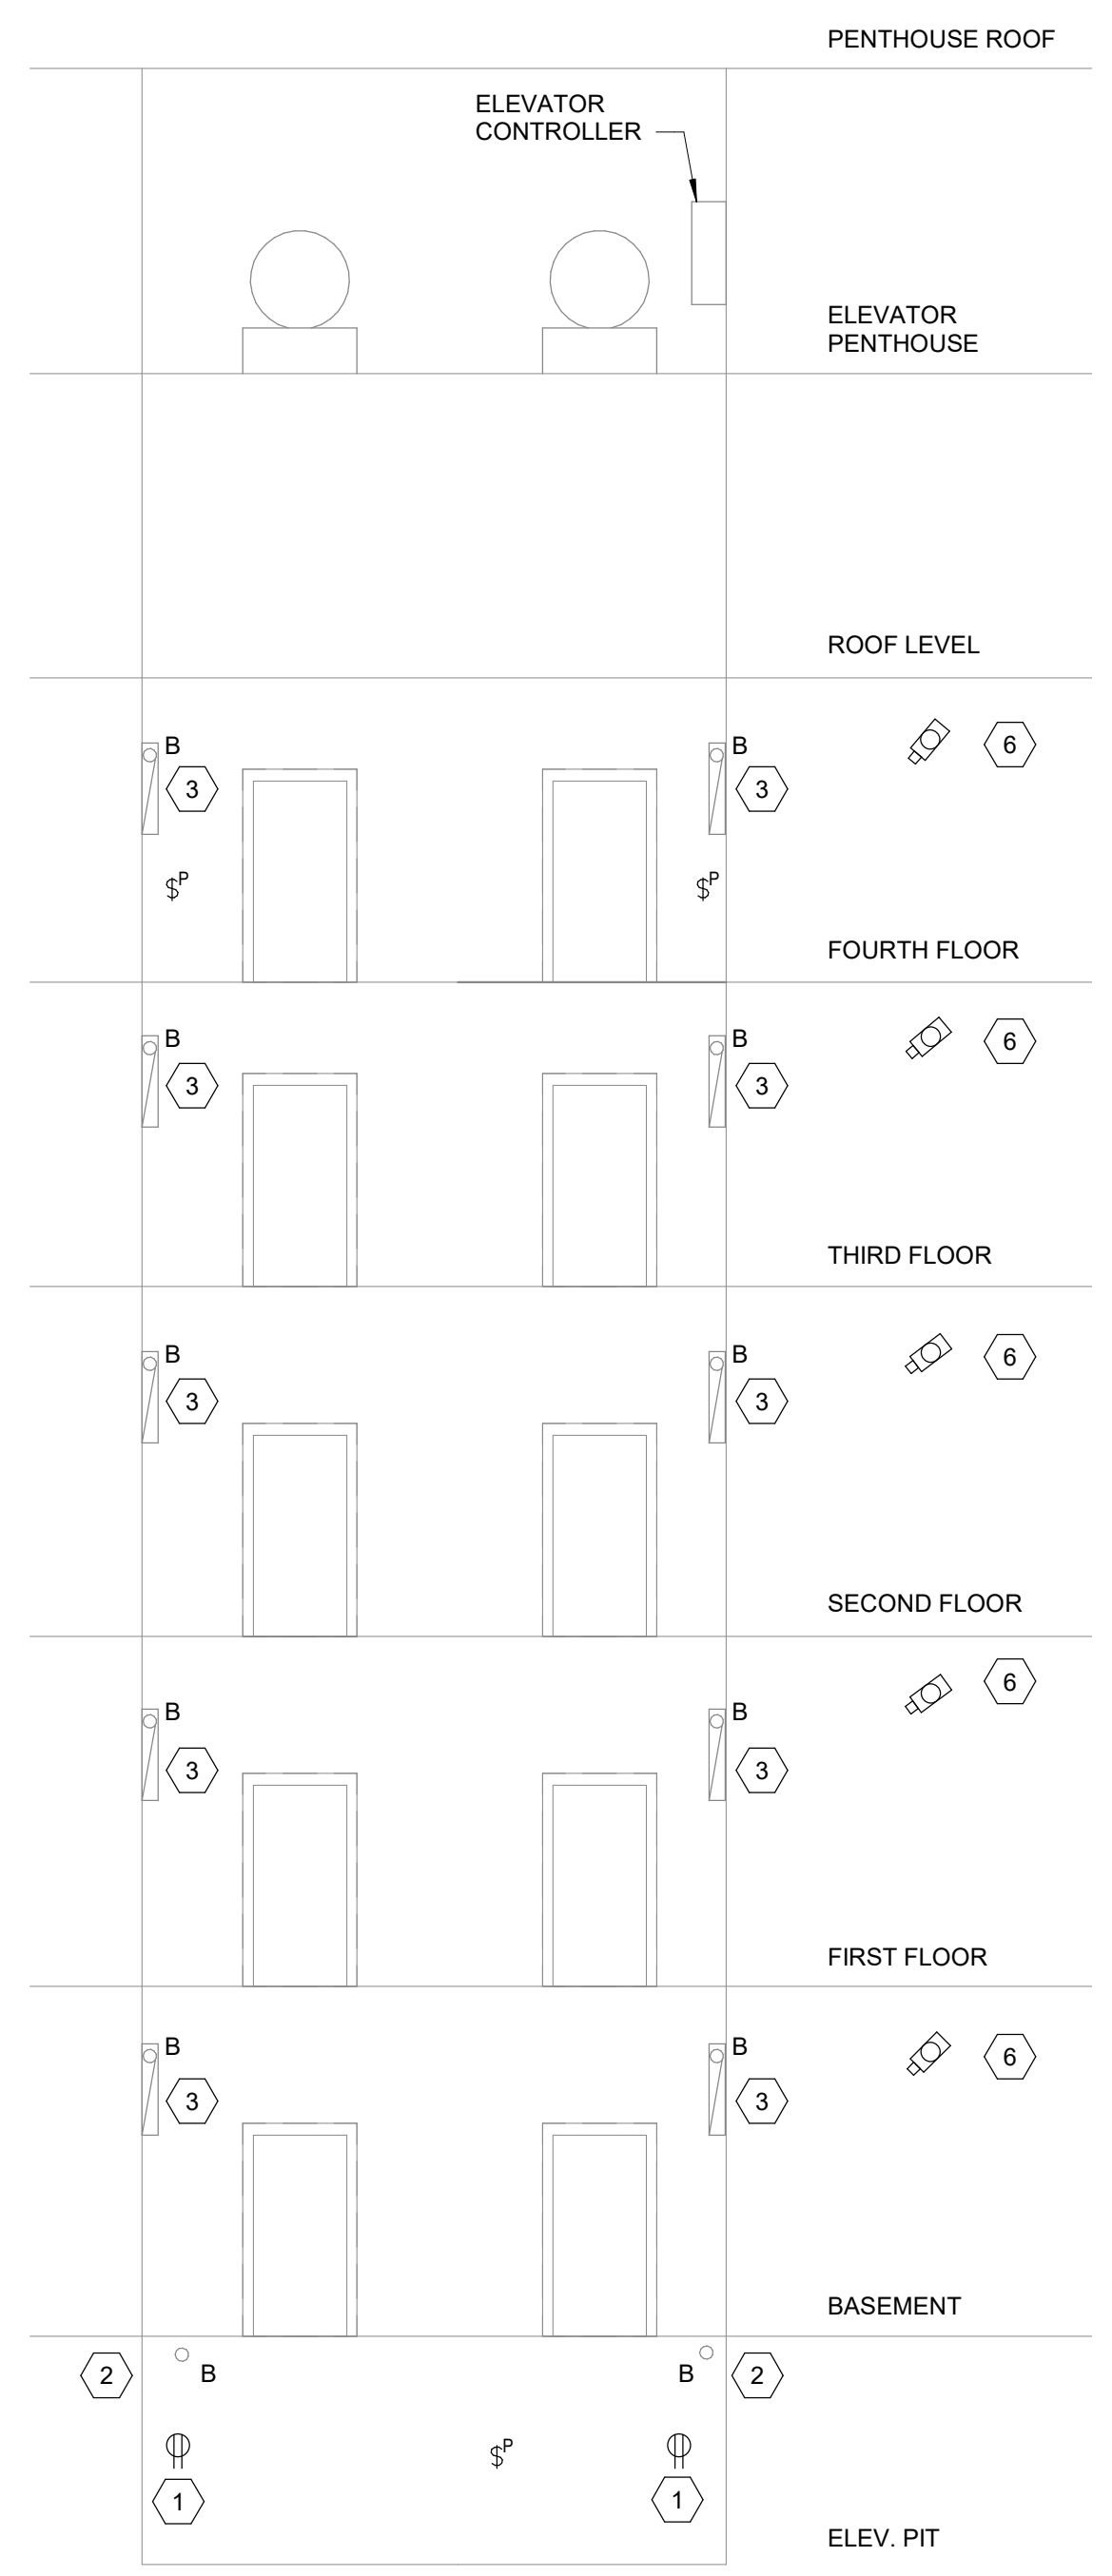


ELEVATORS -
P1 & P2
BUILDING 1

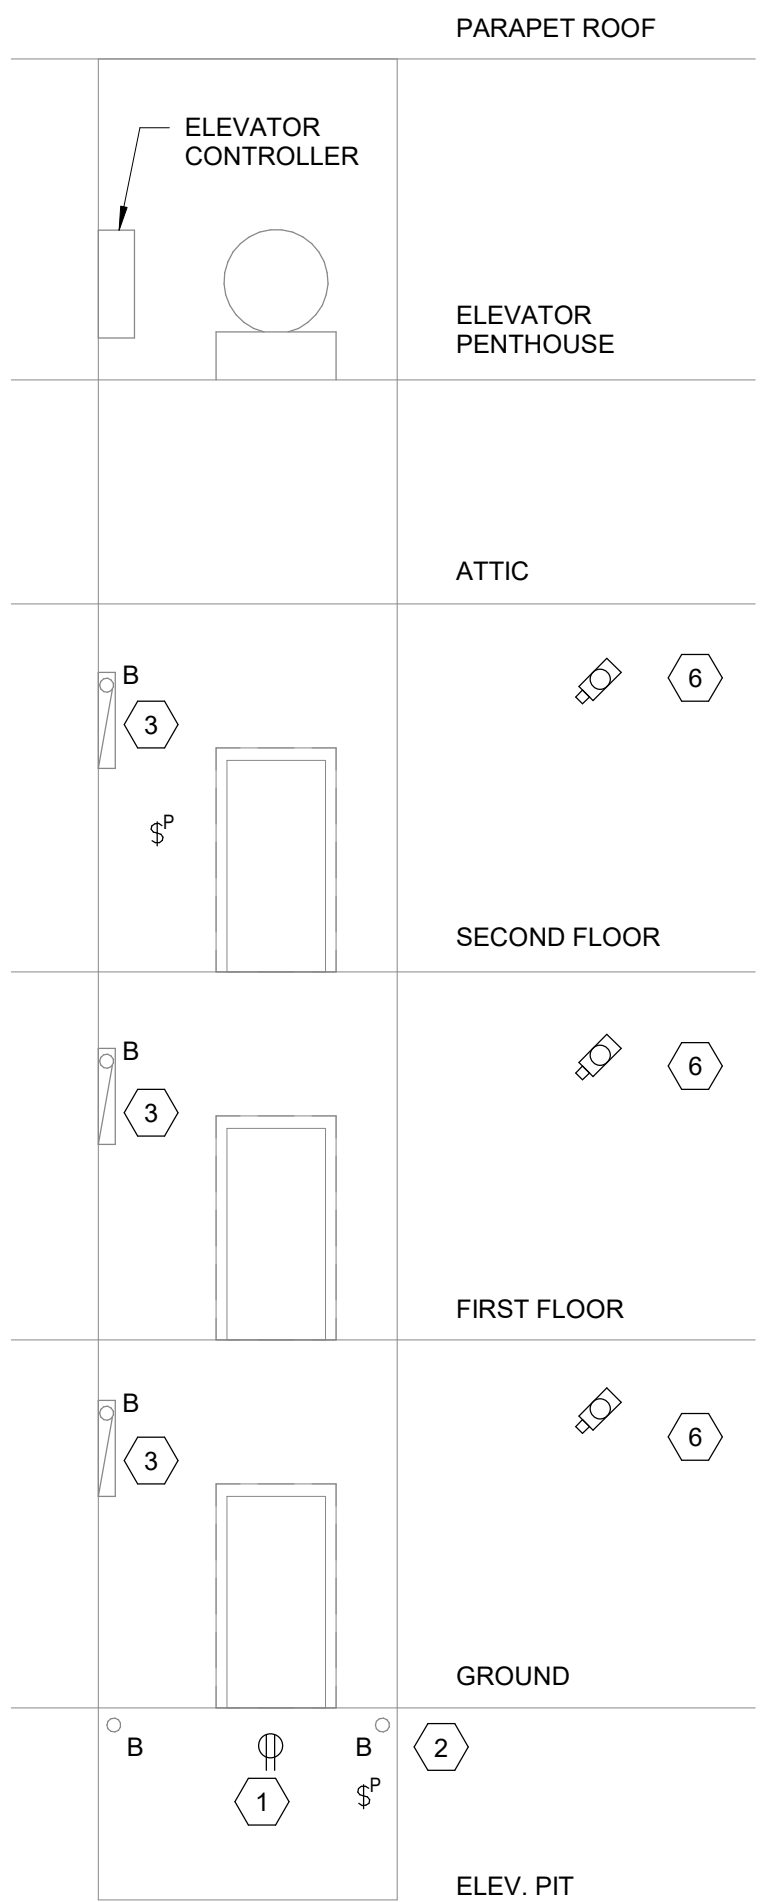

ELEVATOR -
P3
BUILDING 2

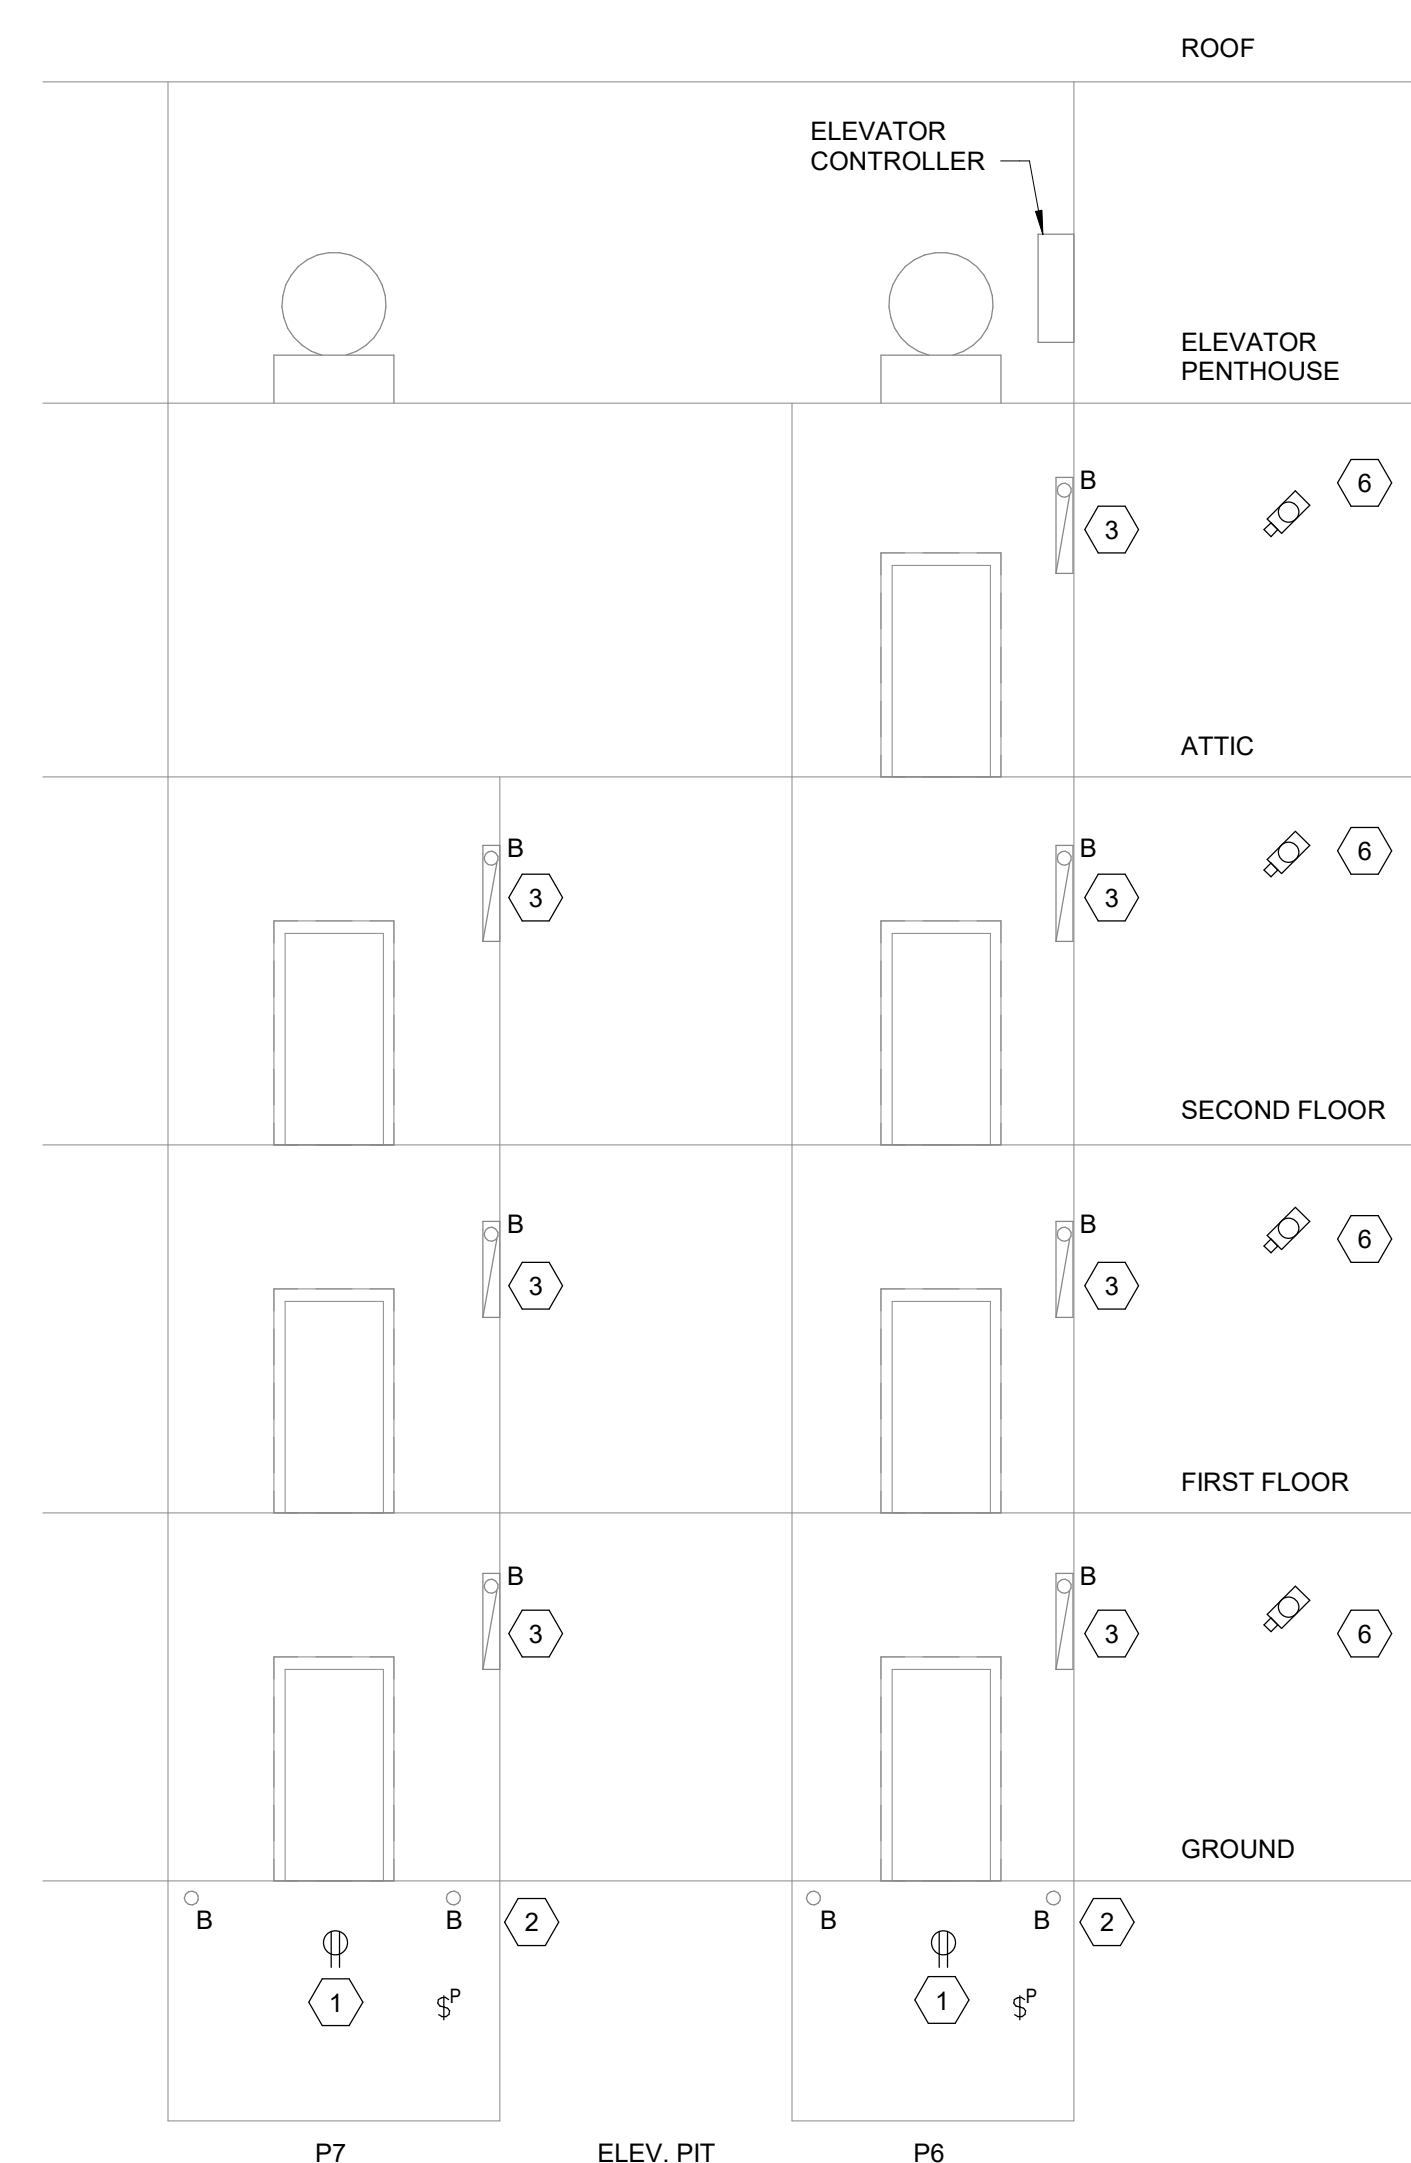

ELEVATORS -
P6 & P7
BUILDING 38

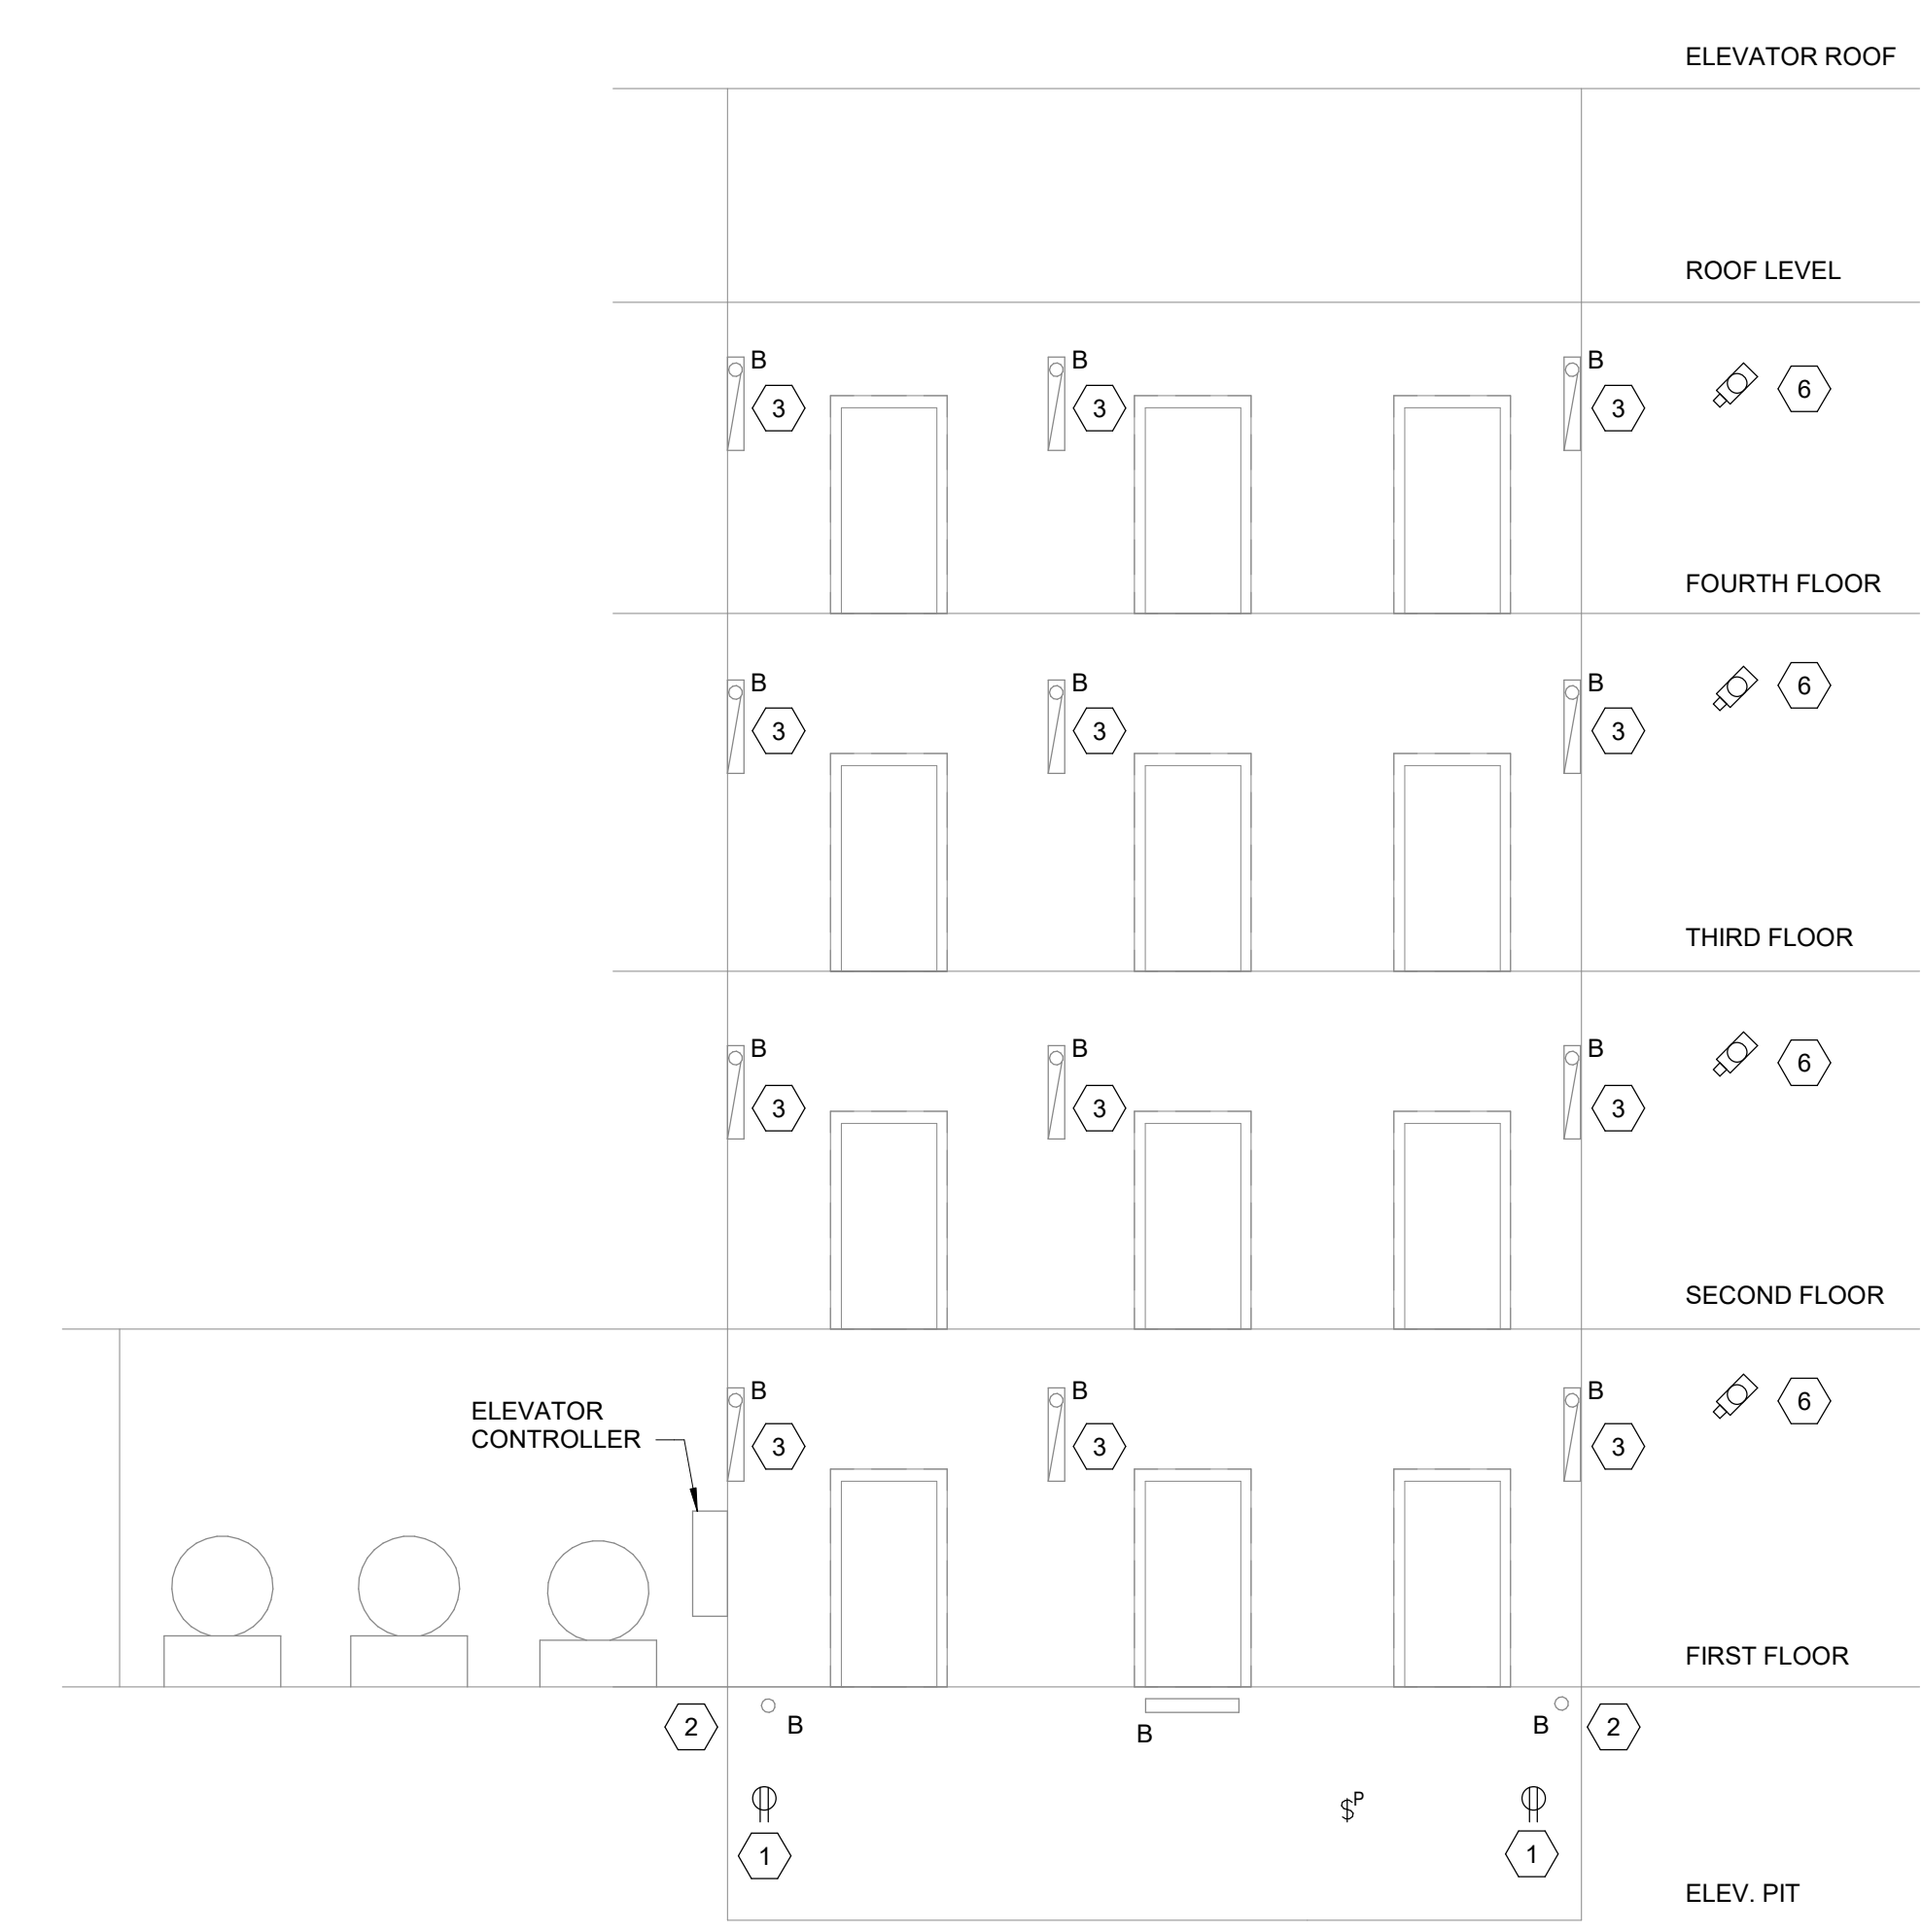

ELEVATORS -
P17, P18 & P19
BUILDING 137

SHEET NOTES:


- A. IN PASSENGER ELEVATOR SHAFTS, ONE HOISTWAY LIGHT SHALL BE ADDED AT EACH LEVEL, FOR EACH ELEVATOR CAB. IF MULTIPLE ELEVATORS SHARE A SHAFT THERE WILL BE MULTIPLE LIGHTS AT EACH LEVEL OF THE HOISTWAY.

KEY NOTES:

- 1 REPLACE EXISTING CONVENIENCE OUTLET IN EACH ELEVATOR PIT WITH GFI TYPE. MAINTAIN EXISTING CIRCUITING.
- 2 REMOVE EXISTING PIT LIGHTS AND INSTALL ONE (1) TYPE B FIXTURE IN ELEVATOR PIT. ONE FOR EACH ELEVATOR CAB. CIRCUITED TO THE EXISTING CIRCUIT AND CONTROL. (MINIMUM NUMBER OF PIT LIGHTS SHALL BE TWO TOTAL).
- 3 REMOVE EXISTING HOISTWAY LIGHTING AND INSTALL ONE (1) TYPE B FIXTURE IN THE HOISTWAY FOR EACH ELEVATOR CAB. ON EACH LEVEL. COORDINATE LOCATION WITH ELEVATOR CLEARANCES. MAINTAIN CIRCUITING AND CONTROL.
- 4 PROVIDE NEW LIGHTING CIRCUIT AS INDICATED.
- 5 PROVIDE LIGHTING AS SHOWN AND CIRCUIT TO NEW CIRCUIT. PROVIDE NEW LIGHTING CONTROL SWITCH.
- 6 NEW CAMERA TO BE INSTALLED IN ELEVATOR LOBBY. CONNECT NEW CAMERA TO EXISTING CAMERA SYSTEM.

★ ALTERNATE NOTES
1. DELETE ALL WORK IN BUILDING NUMBER 1


FULLY SPRINKLERED
100% BID DOCUMENTS

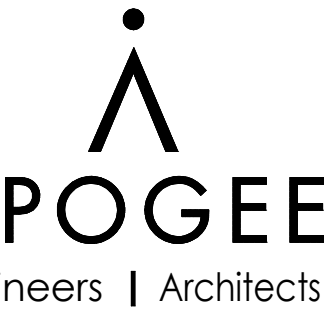CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title ELEVATOR ELECTRICAL SECTIONS		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
 Michael Blades & Associates, Ltd Elevator and Escalator Consulting			 Apogee Consulting Group, P.A. Engineers Architects www.acg-pa.com		U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC, VISN 7		Approved		Drawing Number E-201	
Revisions:			ACG Project Number 21-344		Date FEBRUARY 6, 2025		Checked JKM		Drawn PDN		Dwg 15 of 16	
Date			2/5/2025		2/5/2025							

C:\Users\jmuenschwand\Documents\E_21-344-VA_Tuscaloosa-Upgrade\Elevators-AL_Building_1_Administrative_jmuenschwand.rvt

2/4/2025 11:52:27 PM

VA FORM 08-6231

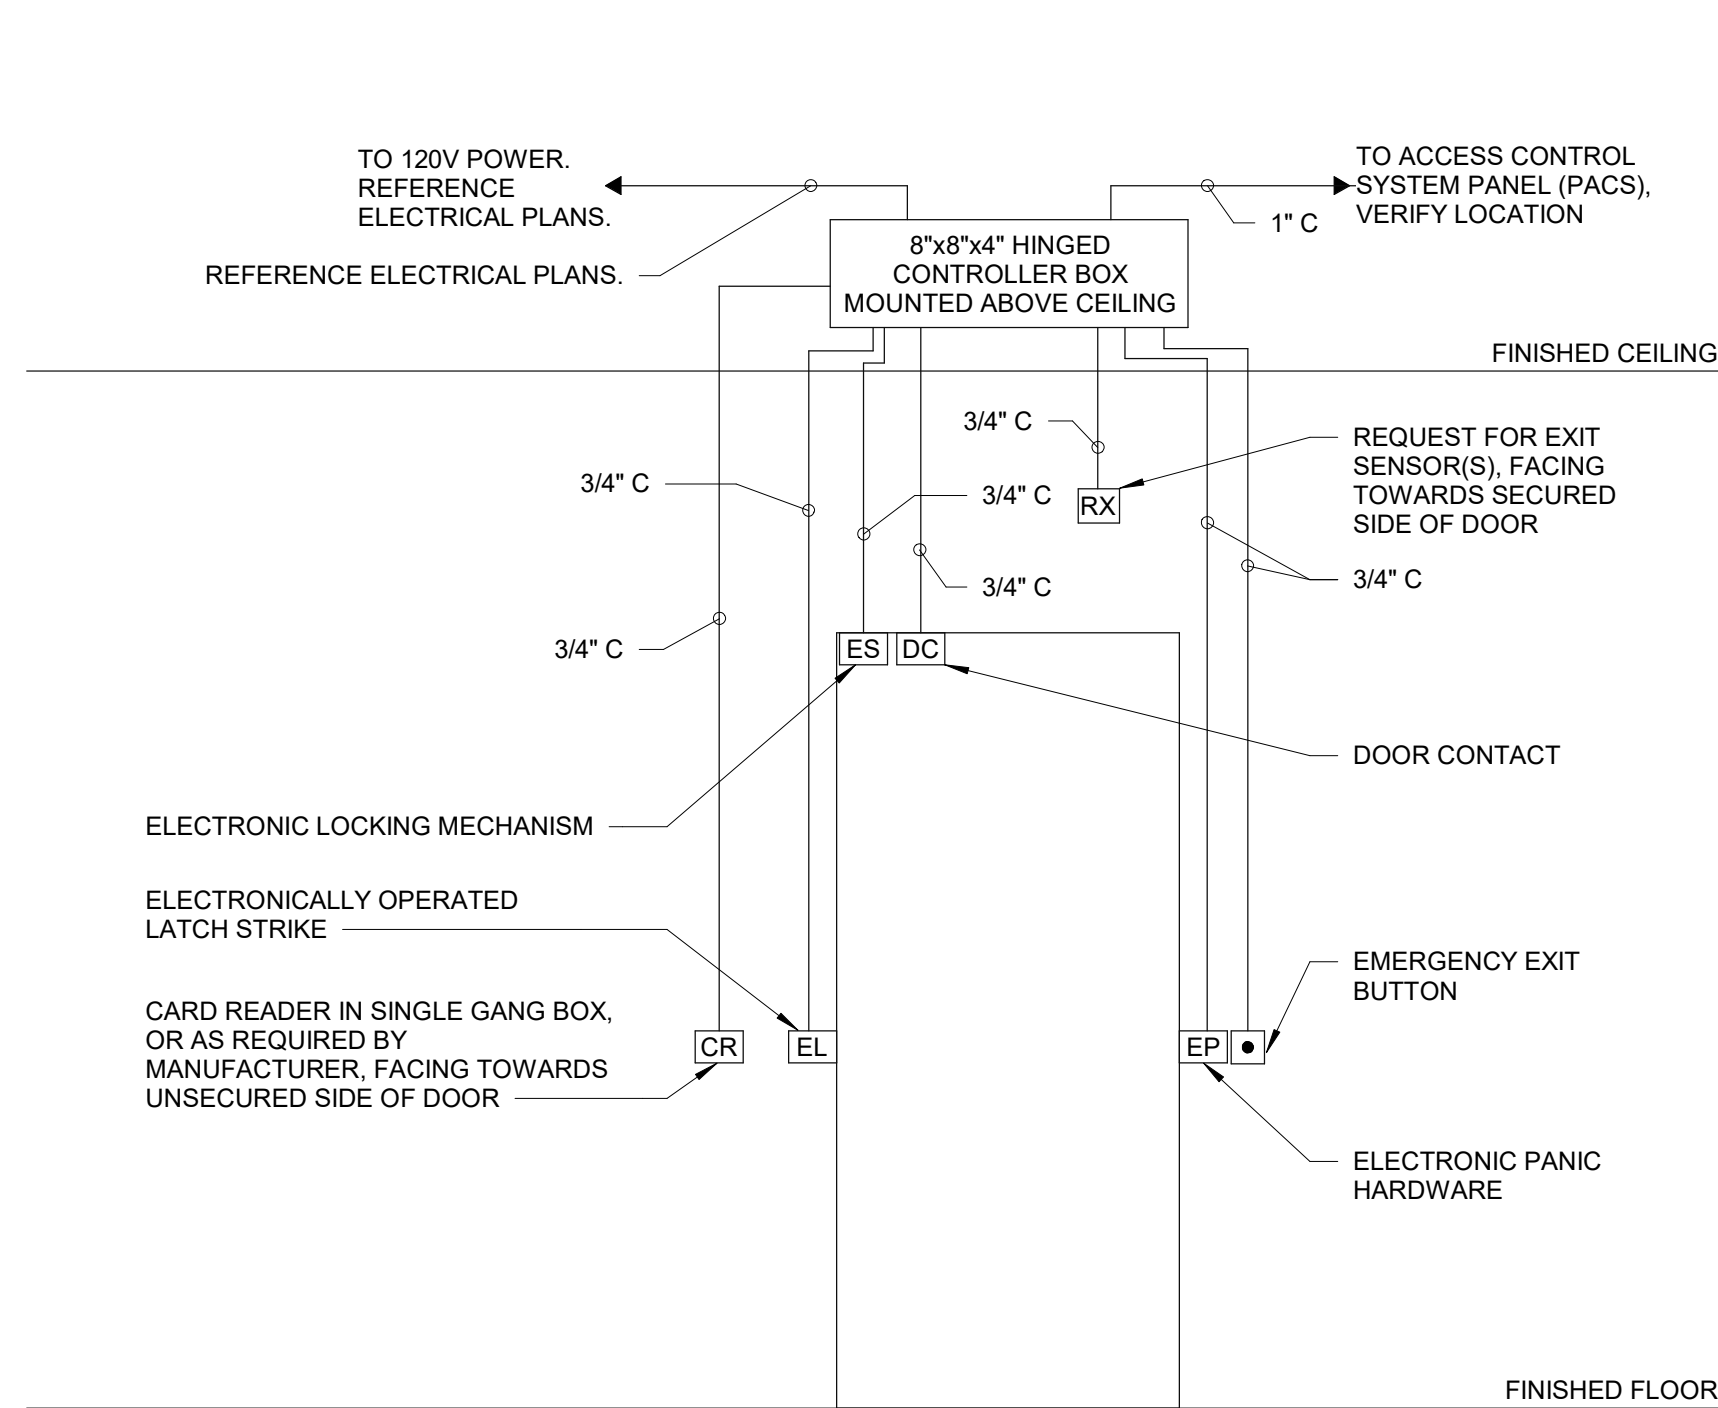


- DETAIL NOTES:**
- A. ELECTRICAL CONTRACTOR SHALL PROVIDE CONDUIT, BOXES, AND SUPPORTS. COORDINATE AND VERIFY LOCATIONS WITH COR.
 - B. PROVIDE CABLING PER MANUFACTURER'S RECOMMENDATION.
 - C. COORDINATE PER ARCHITECTURAL PLANS & DOOR HARDWARE SCHEDULE. INDICATED AS GENERAL. PROVIDE AS INDICATED ON PLANS

5 SINGLE DOOR CARD ACCESS - PANIC HARDWARE
Scale: No Scale


EQUIPMENT CONDUCTOR SCHEDULE											
TAG	DESCRIPTION	VOLTS	PHASE	LOAD	MOCP	CONDUCTORS	NEUTRAL	GROUND	CONDUIT	DISCONNECT TYPE	
1-P1-OU 1-P1-IU	DUCTLESS SPLIT SYSTEM	208	1	19.5 MCA	30	2	10 AWG	-	10 AWG	3/4"	30A NEMA 3R FUSIBLE DISCONNECT
1-P1-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	-	12 AWG	3/4"	CORD AND PLUG
2-P3-OU 2-P3-IU	DUCTLESS SPLIT SYSTEM	208	1	19.5 MCA	30	2	10 AWG	-	10 AWG	3/4"	30A NEMA 3R FUSIBLE DISCONNECT
2-P3-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	12 AWG	12 AWG	3/4"	CORD AND PLUG
5-P13-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	12 AWG	12 AWG	3/4"	CORD AND PLUG
5-P13-OU 5-P13-IU	DUCTLESS SPLIT SYSTEM	208	1	19.5 MCA	30	2	10 AWG	-	10 AWG	3/4"	30A NEMA 3R FUSIBLE DISCONNECT
38-P6-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	12 AWG	12 AWG	3/4"	CORD AND PLUG
38-P7-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	12 AWG	12 AWG	3/4"	CORD AND PLUG
135-P14-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	12 AWG	12 AWG	3/4"	CORD AND PLUG
135-P14-OU 135-P14-IU	DUCTLESS SPLIT SYSTEM	208	1	19.5 MCA	30	2	10 AWG	-	10 AWG	3/4"	30A NEMA 3R FUSIBLE DISCONNECT
137-P17-OU 137-P17-IU	DUCTLESS SPLIT SYSTEM	208	1	19.5 MCA	30	2	10 AWG	-	10 AWG	3/4"	30A NEMA 3R FUSIBLE DISCONNECT
137-P18-OU 137-P18-IU	DUCTLESS SPLIT SYSTEM	208	1	19.5 MCA	30	2	10 AWG	-	10 AWG	3/4"	30A NEMA 3R FUSIBLE DISCONNECT
137-P19-SP	ELEVATOR PIT SUMP PUMP	120	1	0.5 HP	20	1	12 AWG	-	12 AWG	3/4"	CORD AND PLUG

3 UL PENETRATION DETAIL C-AJ-1001
Scale: No Scale

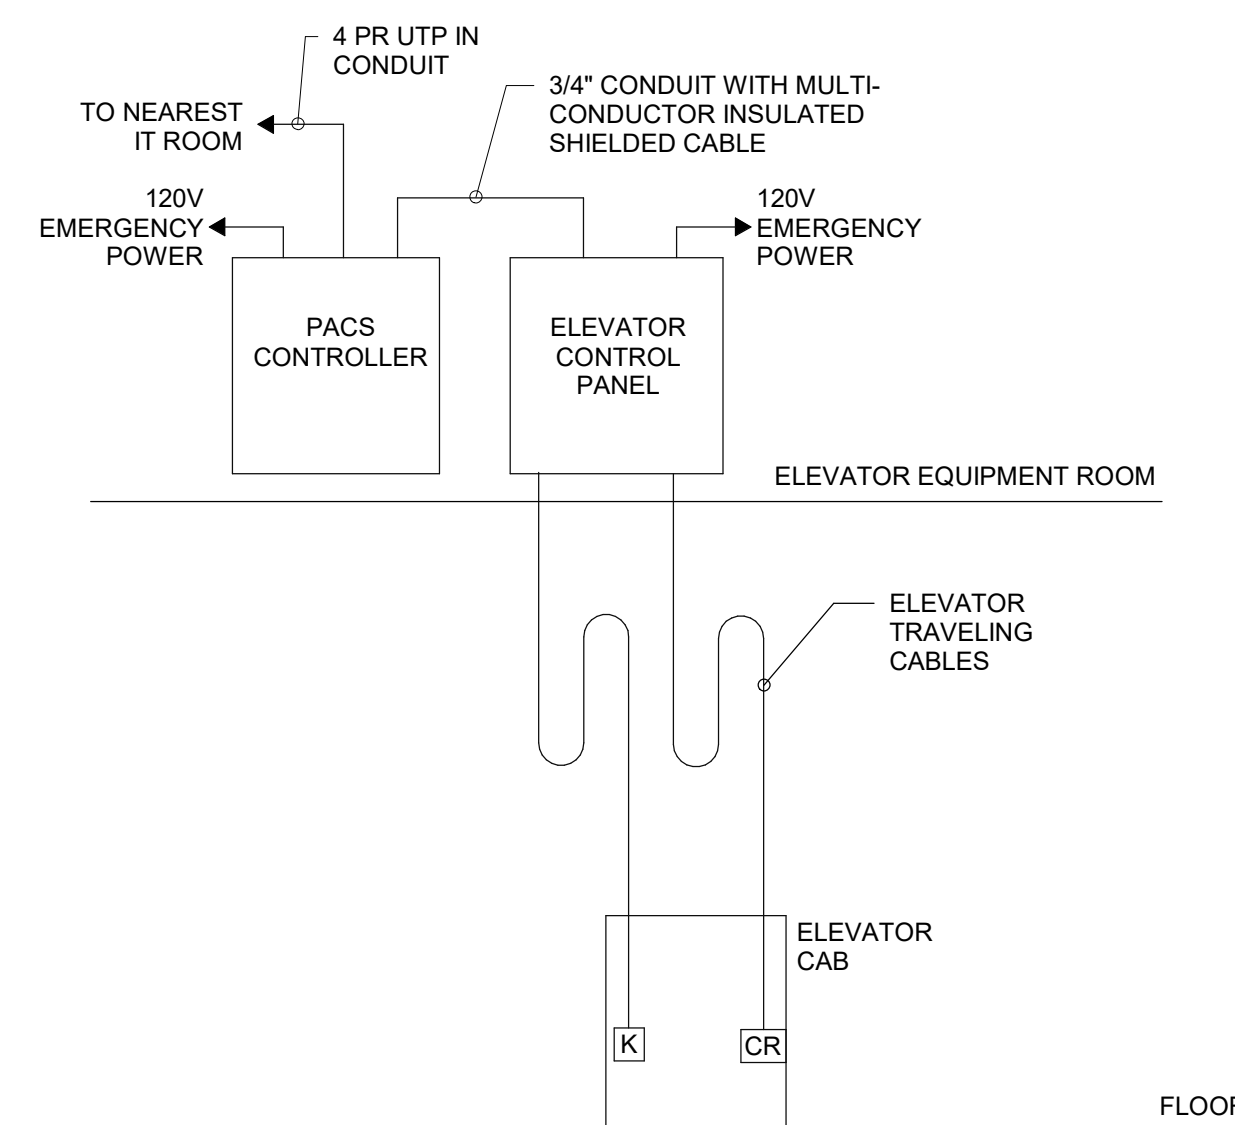

4 PACS WITH ELEVATORS DETAIL
Scale: No Scale

System No. C-AJ-1001
June 15, 2005
F Rating - 3 Hr
T Rating - 0 Hr
W Rating - Class I (See Item 4)

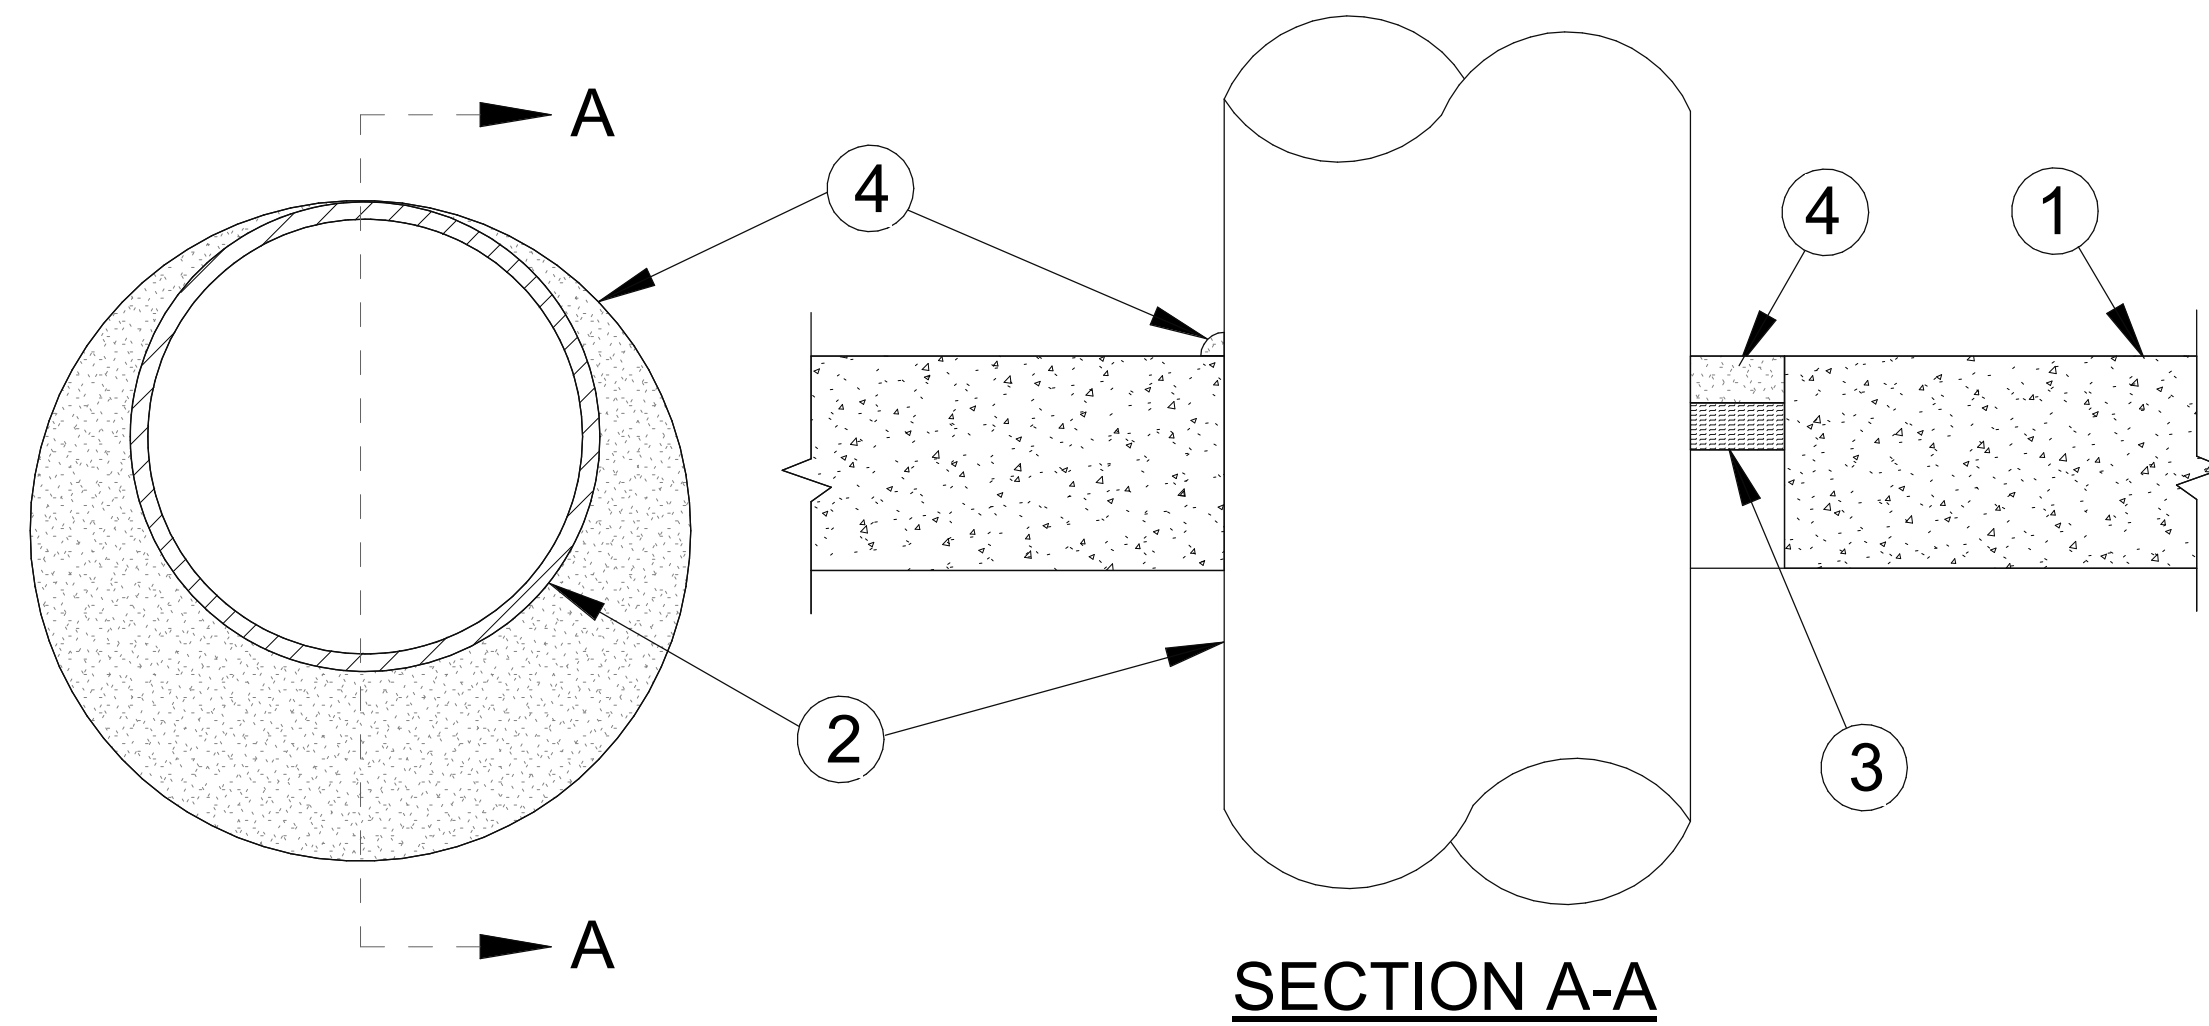

1. FLOOR OR WALL ASSEMBLY - MIN 4-1/2 IN. (114 MM) THICK LIGHTWEIGHT OR NORMAL WEIGHT (100-150 PCF OR 1600-2400 KG/M³) CONCRETE. WALL MAY ALSO BE CONSTRUCTED OF ANY UL CLASSIFIED **CONCRETE BLOCKS**. MAX DIAM OF CIRCULAR THROUGH OPENING IS 32-1/2 IN. (826 MM).

SEE **CONCRETE BLOCKS** (CAZT) CATEGORY IN THE FIRE RESISTANCE DIRECTORY FOR NAMES OF MANUFACTURERS.

1A. STEEL SLEEVE (OPTIONAL, NOT SHOWN) - NOM 12 IN. (305 MM) DIAM (OR SMALLER) SCHEDULE 40 (OR HEAVIER) STEEL PIPE SLEEVE CAST INTO CONCRETE FLOOR OR WALL. SLEEVE TO BE FLUSH WITH OR PROJECT MAX 2 IN. (51MM) FROM TOP SURFACE OF FLOOR OR FROM BOTH SURFACES OF WALL.

2. THROUGH PENETRANT - ONE METALLIC PIPE, CONDUIT OR TUBING INSTALLED EITHER CONCENTRICALLY OR ECCENTRICALLY WITHIN THE FIRESTOP SYSTEM. THE ANNULAR SPACE BETWEEN PIPE, CONDUIT OR TUBING AND PERIPHERY OF OPENING SHALL BE MIN OF 0 IN. (0 MM) (POINT CONTACT) TO MAX 1-3/8 IN. (35 MM). PIPE, CONDUIT OR TUBING TO BE RIGIDLY SUPPORTED ON BOTH SIDES OF WALL ASSEMBLY. THE FOLLOWING TYPES AND SIZES OF METALLIC PIPES, CONDUITS OR TUBING MAY BE USED:

- A. STEEL PIPE** - NOM 30 IN. (762 MM) DIAM (OR SMALLER) SCHEDULE 10 (OR HEAVIER) STEEL PIPE.
- A1. IRON PIPE** - NOM 30 IN. (762 MM) DIAM (OR SMALLER) CAST OR DUCTILE IRON PIPE.
- B. CONDUIT** - NOM 6 IN. (152 MM) DIAM (OR SMALLER) RIGID STEEL CONDUIT.
- C. CONDUIT** - NOM 4 IN. (102 MM) DIAM (OR SMALLER) STEEL ELECTRICAL METALLIC TUBING.

3. PACKING MATERIAL - POLYETHYLENE BACKER ROD OR NOM 1 IN. (25 MM) THICKNESS OF TIGHTLY-PACKED CERAMIC (ALUMINA SILICA) FIBER BLANKET, MINERAL WOOL BATT OR GLASS FIBER INSULATION MATERIAL USED AS A PERMANENT FORM. PACKING MATERIAL TO BE RECESSED FROM TOP SURFACE OF FLOOR OR FROM BOTH SURFACES OF SOLID CONCRETE OR CONCRETE BLOCK WALL AS REQUIRED TO ACCOMMODATE THE REQUIRED THICKNESS OF CAULK FILL MATERIAL (ITEM 4). AS AN ALTERNATE WHEN MAX PIPE SIZE IS 10 IN. (254 MM) DIAM AND WHEN MAX ANNULAR SPACE IS 1 IN. (25 MM), A MIN 1 IN. (25 MM) THICKNESS OF TIGHTLY-PACKED CERAMIC FIBER BLANKET OR MINERAL WOOL BATT PACKING MATERIAL MAY BE RECESSED MIN 1/2 IN. (13 MM) FROM BOTTOM SURFACE OF FLOOR OR FROM EITHER SIDE OF SOLID CONCRETE WALL.


4. FILL VOID OR CAVITY MATERIALS - **CAULK OR SEALANT** - APPLIED TO FILL THE ANNULAR SPACE TO THE MIN THICKNESS SHOWN IN THE FOLLOWING TABLE:

MAX PIPE DIAM IN. (MM)	MAX ANNULAR SPACE IN. (MM)	PACKING MATL TYPE (a)	MIN. CAULK THKNS IN. (MM)
10 (254)	1 (25)	BR, CF, GF OR MW	1/2 (13) (b)
10 (254)	1 (25)	CF OR MW	1/2 (13) (c)
30 (762)	2-1/2 (64)	BR, CF, GF OR MW	1 (25) (b)

- (A) BR = POLYETHYLENE BACKER ROD.
- CF = CERAMIC FIBER BLANKET.
- GF = GLASS FIBER INSULATION.
- MW = MINERAL WOOL BATT.
- (B) CAULK INSTALLED FLUSH WITH TOP SURFACE OF FLOOR OR BOTH SURFACES OF WALL.
- (C) CAULK INSTALLED FLUSH WITH BOTTOM SURFACE OF FLOOR OR ONE SURFACE OF SOLID (NON-CONCRETE BLOCK) WALL.

3M COMPANY - CP 25WB+ CAULK OR FB-3000 WT SEALANT.
(NOTE: W RATING APPLIES ONLY WHEN FB-3000 WT SEALANT IS USED.)

*BEARING THE UL CLASSIFICATION MARKING

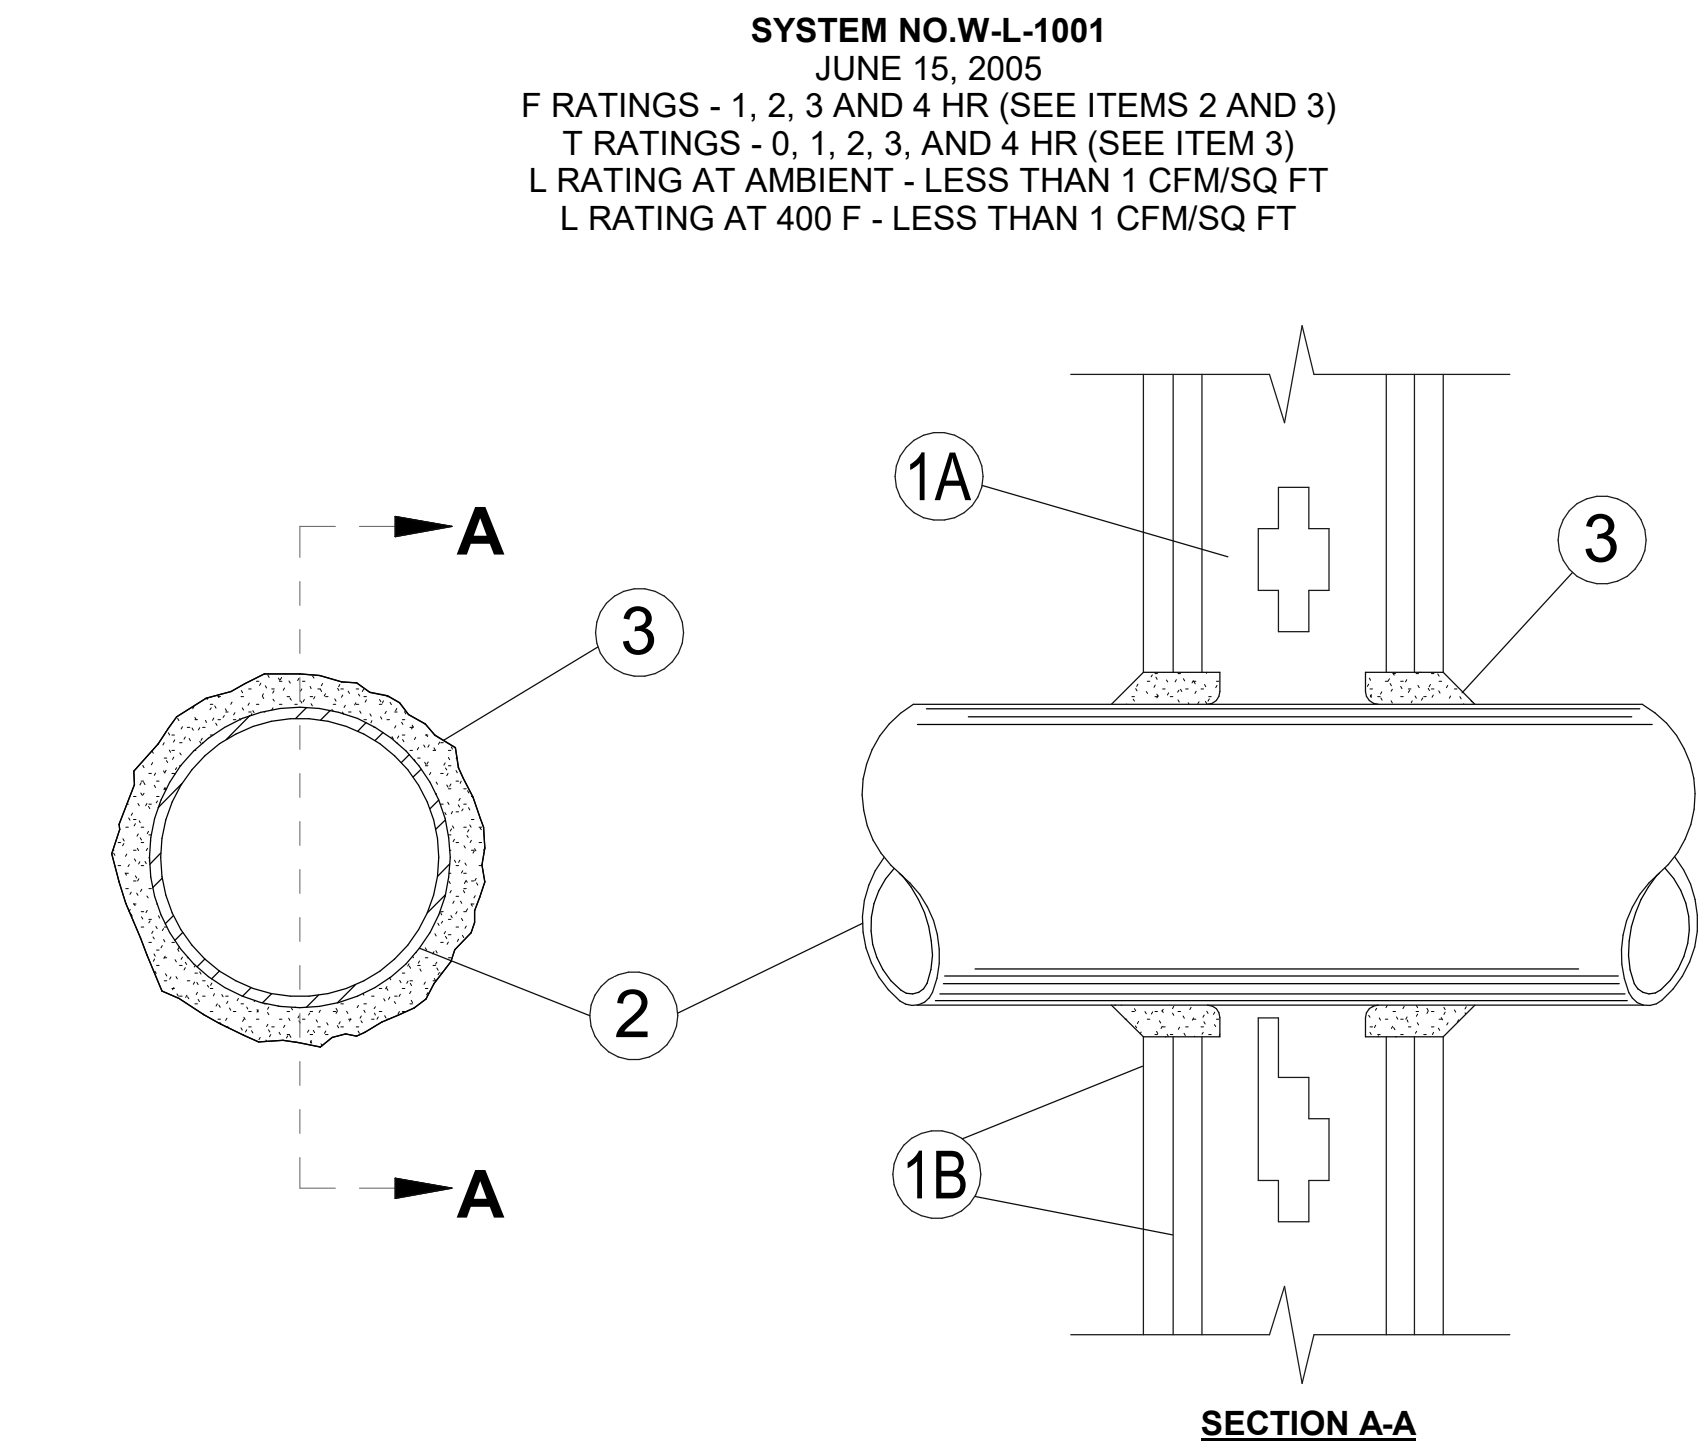

1. WALL ASSEMBLY - THE 1, 2, 3 OR 4 HR FIRE-RATED GYPSUM WALLBOARD/STUD WALL ASSEMBLY SHALL BE CONSTRUCTED OF THE MATERIALS AND IN THE MANNER DESCRIBED IN THE INDIVIDUAL U300 OR U400 SERIES WALL OR PARTITION DESIGNS IN THE UL FIRE RESISTANCE DIRECTORY AND SHALL INCLUDE THE FOLLOWING CONSTRUCTION FEATURES:

- A. STUDS** - WALL FRAMING MAY CONSIST OF EITHER WOOD STUDS (MAX 2 HR FIRE RATED ASSEMBLIES) OR STEEL CHANNEL STUDS. WOOD STUDS TO CONSIST OF NOM 2 BY 4 IN. (51 BY 102 MM) LUMBER SPACED 16 IN. (406 MM) OC WITH NOM 2 BY 4 IN. (51 BY 102 MM) LUMBER END PLATES AND CROSS BRACES. STEEL STUDS TO BE MIN 3-5/8 IN. (92 MM) WIDE BY 1-3/8 IN. (35 MM) DEEP CHANNELS SPACED MAX 24 IN. (610 MM) OC.
- B. GYPSUM WALLBOARD** - NOM 1/2 OR 5/8 IN. (13 OR 16 MM) THICK, 4 FT. (122 CM) WIDE WITH SQUARE OR TAPERED EDGES. THE GYPSUM WALLBOARD TYPE, THICKNESS, NUMBER OF LAYERS, FASTENER TYPE AND SHEET ORIENTATION SHALL BE AS SPECIFIED IN THE INDIVIDUAL U300 OR U400 SERIES DESIGN IN THE UL FIRE RESISTANCE DIRECTORY. MAX DIAM OF OPENING IS 26 IN. (660 MM).

2. THROUGH PENETRANT - ONE METALLIC PIPE, CONDUIT OR TUBING INSTALLED EITHER CONCENTRICALLY OR ECCENTRICALLY WITHIN THE FIRESTOP SYSTEM. THE ANNULAR SPACE BETWEEN PIPE, CONDUIT OR TUBING AND PERIPHERY OF OPENING SHALL BE MIN OF 0 IN. (0 MM) (POINT CONTACT) TO MAX 2 IN. (51 MM). PIPE, CONDUIT OR TUBING TO BE RIGIDLY SUPPORTED ON BOTH SIDES OF WALL ASSEMBLY. THE FOLLOWING TYPES AND SIZES OF METALLIC PIPES, CONDUITS OR TUBING MAY BE USED:

- A. STEEL PIPE** - NOM 24 IN. (610 MM) DIAM (OR SMALLER) SCHEDULE 10 (OR HEAVIER) STEEL PIPE.
- B. IRON PIPE** - NOM 24 IN. (610 MM) DIAM (OR SMALLER) SERVICE WEIGHT (OR HEAVIER) CAST IRON SOIL PIPE, NOM 12 IN. (305 MM) DIAM (OR SMALLER) OR CLASS 50 (OR HEAVIER) DUCTILE IRON PRESSURE PIPE.
- C. CONDUIT** - NOM 6 IN. (152 MM) DIAM (OR SMALLER) STEEL CONDUIT OR NOM 4 IN. (102 MM) DIAM (OR SMALLER) STEEL ELECTRICAL METALLIC TUBING.
- D. COPPER TUBING** - NOM 6 IN. (152 MM) DIAM (OR SMALLER) TYPE L (OR HEAVIER) COPPER TUBING.
- E. COPPER PIPE** - NOM 6 IN. (152 MM) DIAM (OR SMALLER) REGULAR (OR HEAVIER) COPPER PIPE.
- F. THROUGH PENETRATING PRODUCT** - **FLEXIBLE METAL PIPING** - THE FOLLOWING TYPES OF STEEL FLEXIBLE METAL GAS PIPING MAY BE USED:

1. NOM 2 IN. (51 MM) DIAM (OR SMALLER) STEEL FLEXIBLE METAL GAS PIPING. PLASTIC COVERING ON PIPING MAY OR MAY NOT BE REMOVED ON BOTH SIDES OF FLOOR OR WALL ASSEMBLY.

OMEGA FLEX INC

2. NOM 1 IN. (25 MM) DIAM (OR SMALLER) STEEL FLEXIBLE METAL GAS PIPING. PLASTIC COVERING ON PIPING MAY OR MAY NOT BE REMOVED ON BOTH SIDES OF FLOOR OR WALL ASSEMBLY.

TITFLEX CORP

A BUNDY CO

3. NOM 1 IN. (25 MM) DIAM (OR SMALLER) STEEL FLEXIBLE METAL GAS PIPING. PLASTIC COVERING ON PIPING MAY OR MAY NOT BE REMOVED ON BOTH SIDES OF FLOOR OR WALL ASSEMBLY.

WARD MFG INC

3. FILL VOID OR CAVITY MATERIAL - **CAULK OR SEALANT** - MIN 5/8, 1-1/4, 1-7/8 AND 2-1/2 IN. (16, 32, 48 AND 64 MM) THICKNESS OF CAULK FOR 1, 2, 3 AND 4 HR RATED ASSEMBLIES, RESPECTIVELY, APPLIED WITHIN ANNULUS, FLUSH WITH BOTH SURFACES OF WALL. MIN 1/4 IN. (6 MM) DIAM BEAD OF CAULK APPLIED TO GYPSUM BOARD/PENETRANT INTERFACE AT POINT CONTACT LOCATION ON BOTH SIDES OF WALL. THE HOURLY F RATING OF THE FIRESTOP SYSTEM IS DEPENDENT UPON THE HOURLY FIRE RATING OF THE WALL ASSEMBLY IN WHICH IT IS INSTALLED, AS SHOWN IN THE FOLLOWING TABLE. THE HOURLY F RATING OF THE FIRESTOP SYSTEM IS DEPENDENT UPON THE TYPE OR SIZE OF THE PIPE OR CONDUIT AND THE HOURLY FIRE RATING OF THE WALL ASSEMBLY IN WHICH IT IS INSTALLED, AS TABULATED BELOW:


MAX PIPE OR CONDUIT DIAM IN. (mm)	F RATING HR	T RATING HR
1 (25)	1 OR 2	0+, 1 OR 2
1 (25)	3 OR 4	3 OR 4
4 (102)	1 OR 2	0
6 (152)	3 OR 4	0
12 (305)	1 OR 2	0

+WHEN COPPER PIPE IS USED, T RATING IS 0 HR.

3M COMPANY - CP 25WB+ CAULK OR FB-3000 WT SEALANT.


*BEARING THE UL CLASSIFICATION MARKING

1 UL PENETRATION DETAIL W-L-1001
Scale: No Scale

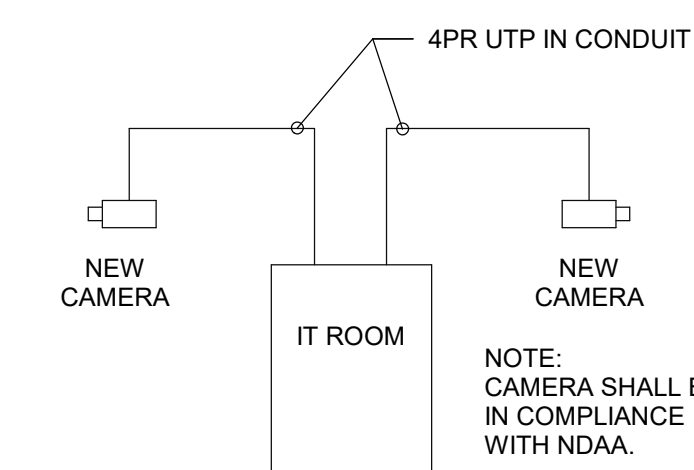


2 TYPICAL CCTV RISER
Scale: No Scale

FULLY SPRINKLERED
100% BID DOCUMENTS

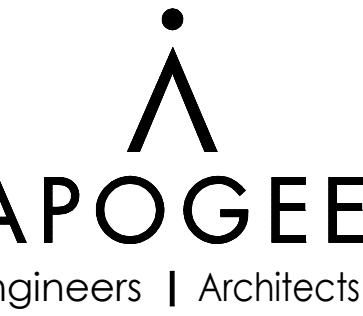CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		ELECTRICAL DETAILS AND EQUIPMENT CONDUCTOR SCHEDULE		ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
 Michael Blades & Associates, Ltd Elevator and Escalator Consulting			 Apogee Consulting Group, P.A. 1151 Kildaire Farm Road, Suite 120 Cary, North Carolina 27511				TUSCALOOSA VAMC, VISION 7		Approved		Building Number 1, 2, 5, 38, 135, & 137	
# Revisions:			2/5/2025		2/5/2025		Date FEBRUARY 6, 2025		Checked JKM		Drawing Number E-501	
Date			2/5/2025		2/5/2025		Drawn PDN				Dwg 16 of 16	


C:\Users\jmuhammad\Documents\21-344-VA Tuscaloosa Upgrade Elevators-AL Building 1 Administrative - jmuhammad.rvt
2/2/2025 3:54:08 PM
VA FORM 08-6231

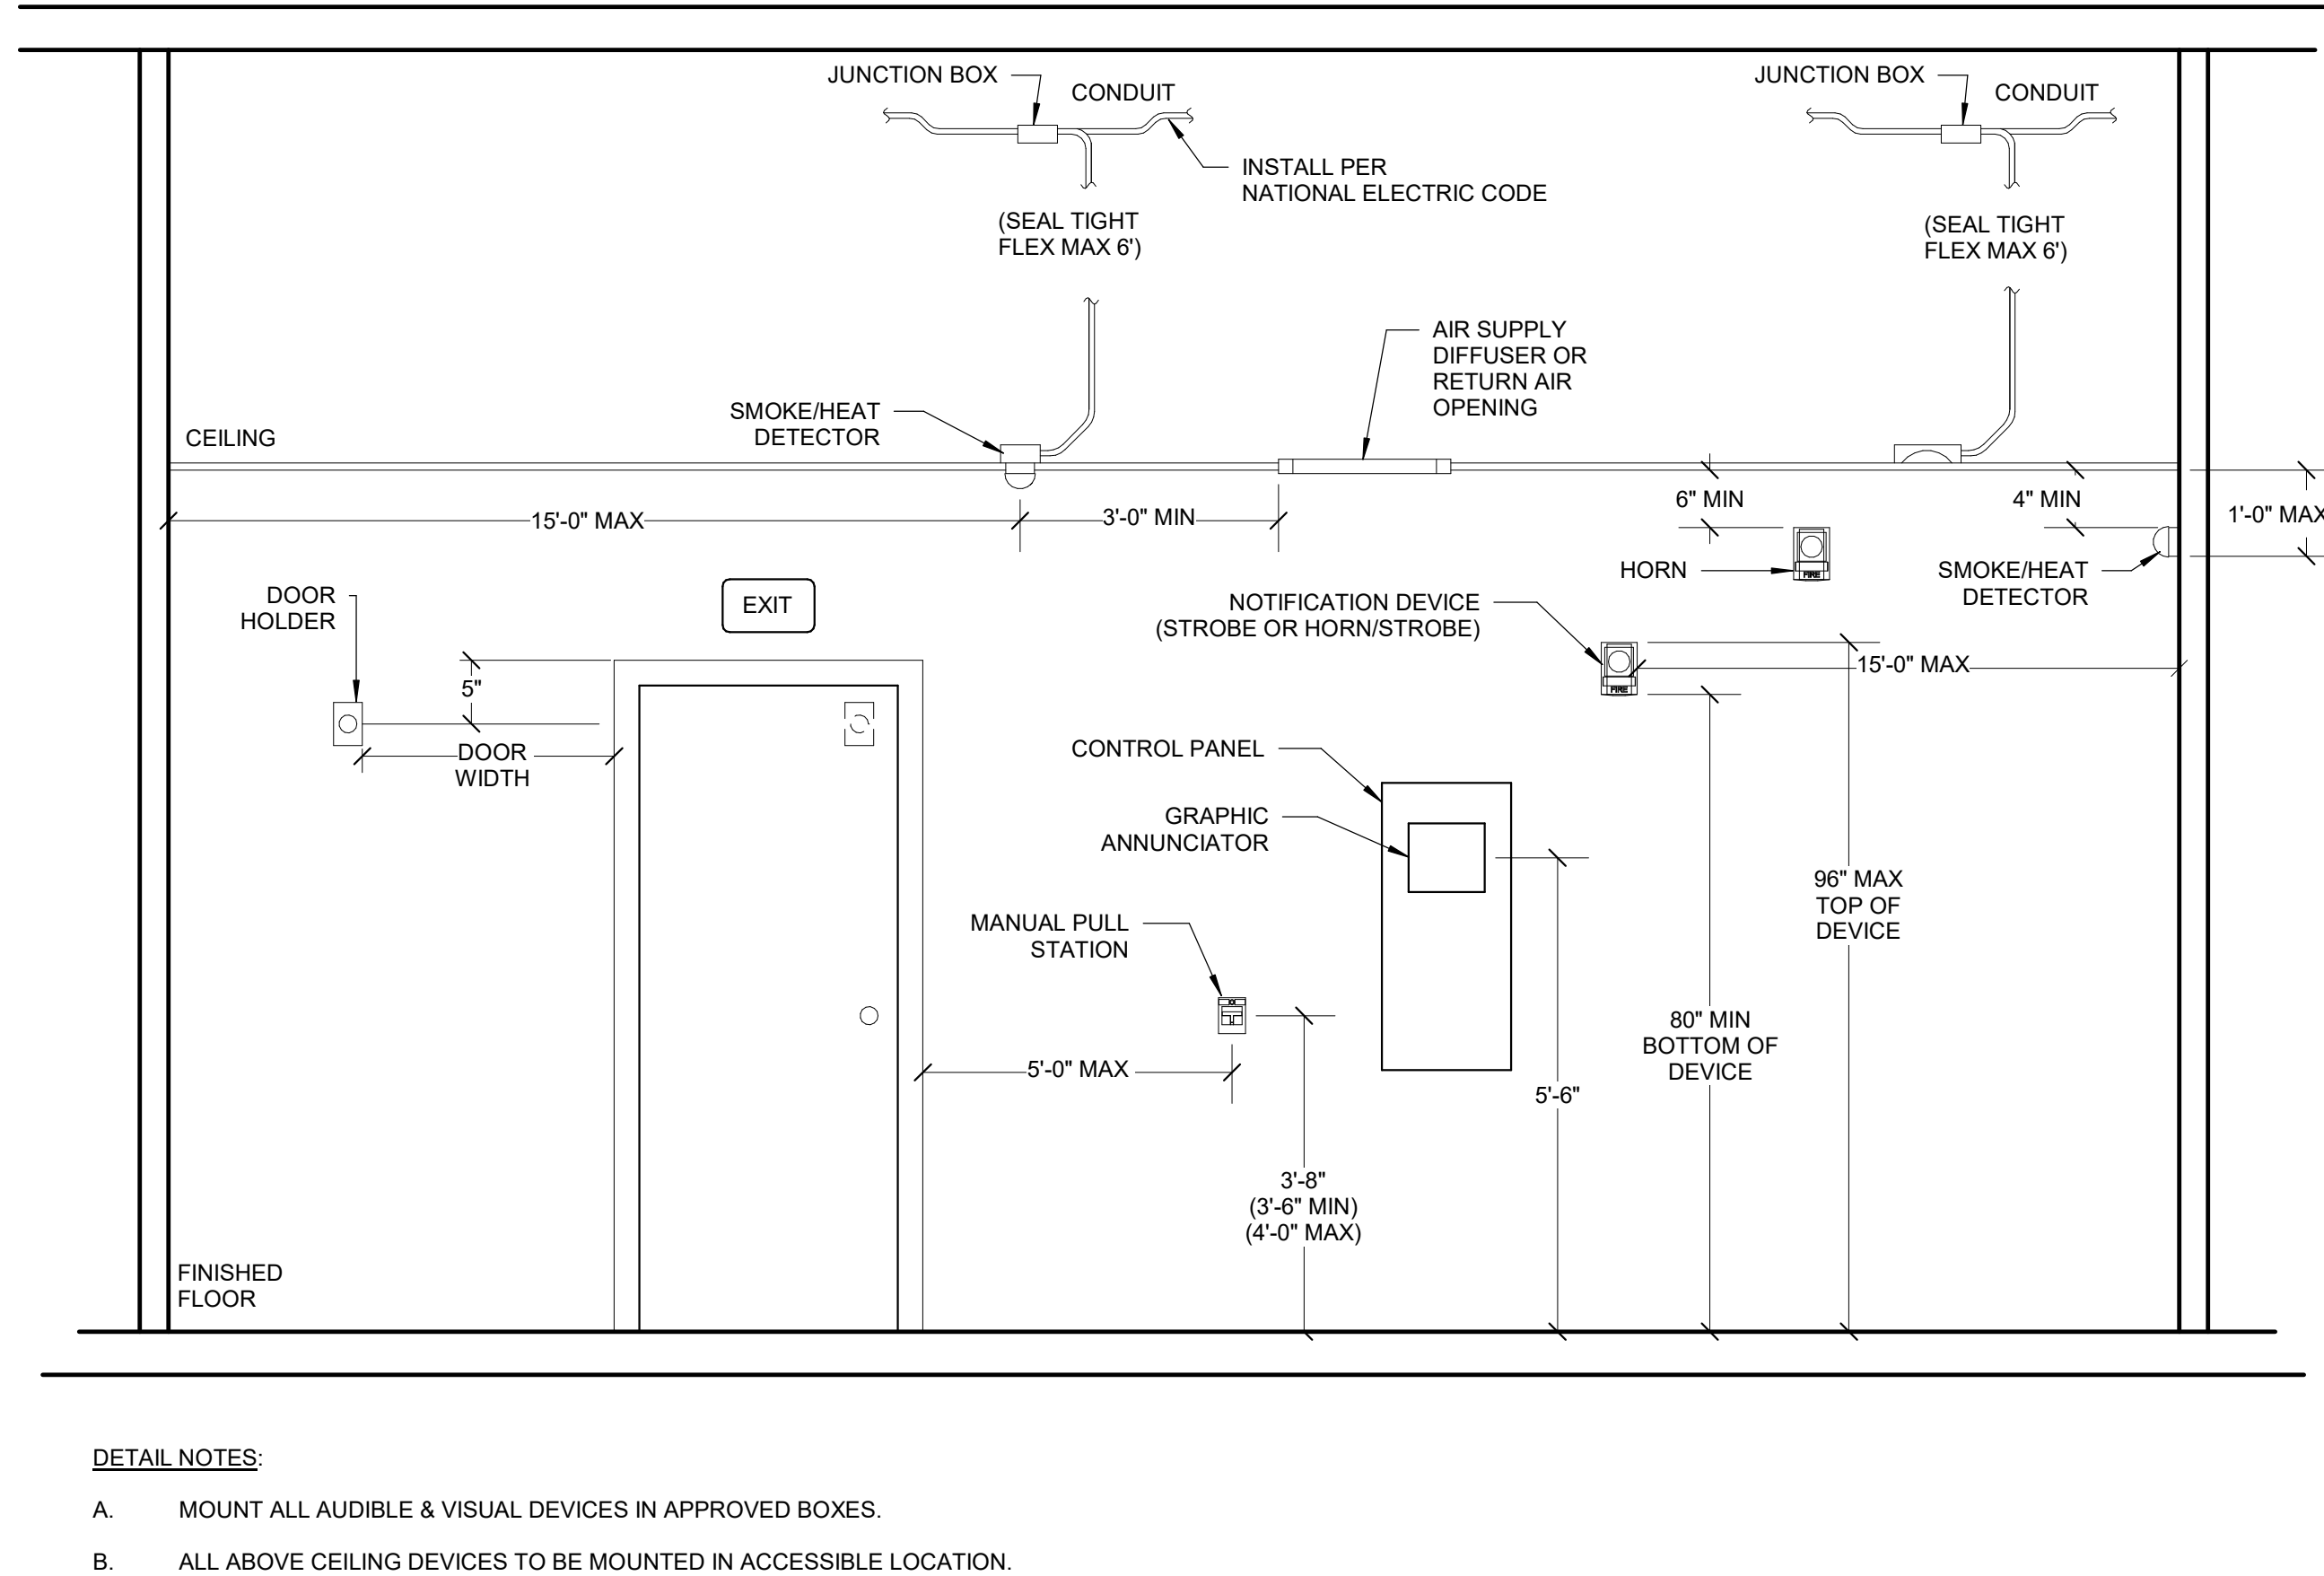

1 FIRE ALARM DEVICE MOUNTING HEIGHTS
Scale: No Scale

FIRE ALARM SYMBOL LEGEND		
SYMBOL	HEIGHT	DESCRIPTION
	42"-48"	FIRE ALARM PULL STATION
	90"	FIRE ALARM SPEAKER
	90"	FIRE ALARM STROBE XX - CANDELA
	90"	FIRE ALARM SPEAKER AND STROBE XX - CANDELA XX - WATTAGE
	WALL	FIRE ALARM DOOR OPEN HOLDER
	CEILING	FIRE ALARM PHOTOELECTRIC SMOKE DETECTOR
	CEILING	FIRE ALARM HEAT DETECTOR
	CEILING	FIRE ALARM CEILING MOUNTED SPEAKER
		FIRE ALARM DUCT SMOKE DETECTOR
	6'	FIRE ALARM CONTROL PANEL
	6'	FIRE ALARM NAC PANEL
	6'	FIRE ALARM ANNUNCIATOR PANEL
	6'	FIRE ALARM GRAPHIC ANNUNCIATOR PANEL
		FLOW SWITCH
		TAMPER SWITCH
		POST INDICATOR VALVE
	6'	REMOTE LIGHT/TEST SWITCH FOR DUCT DETECTORS
	90"	FIRE ALARM BELL
	60"	KNOX BOX
	60"	RELAYS
ALL HEIGHTS ARE TO CENTER OF DEVICE UNLESS NOTED OTHERWISE. TOP HEIGHT TO TOP OF DEVICE ANY HEIGHTS INDICATED IN PLANS SHALL SUPERSEDE THOSE LISTED HERE.		

FIRE ALARM GENERAL NOTES	
1. PROVIDE FIRE ALARM SYSTEM AND COMPONENTS COMPLYING WITH THE LATEST: A. NFPA 13- STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEMS. B. NFPA 14- STANDARD FOR THE INSTALLATION OF STANDPIPE AND HOSE SYSTEM. C. NFPA 20- STANDARD FOR THE INSTALLATION OF STATIONARY PUMPS FOR FIRE PROTECTION. D. NFPA 70 NATIONAL ELECTRICAL CODE. E. NFPA 72 NATIONAL FIRE ALARM AND SIGNALING CODE. F. NFPA 90A STANDARD FOR THE INSTALLATION OF AIR CONDITIONING AND VENTILATING SYSTEMS. G. NFPA 101 LIFE SAFETY CODE. H. VA FIRE PROTECTION DESIGN MANUAL. I. ANSI S3.41 AUDIBLE EMERGENCY EVACUATION SIGNAL.	
2. FIRE ALARM SYSTEM SHALL COMPLY WITH FACTORY MUTUAL RESEARCH CORPORATION (FM).	
3. PROVIDE FIRE ALARM WIRING IN CONDUIT, FACTORY PAINTED RED.	
4. BEFORE STARTING WORK, TEST EXISTING FIRE ALARM SYSTEM IN WORK AREA AND ADJACENT AREAS.	
5. NOTIFY COR REGARDING DEFICIENCIES AND NON-OPERATING COMPONENTS. VA WILL MAKE REPAIRS.	
6. CONTRACTOR TO ENSURE THAT ALL NEW FIRE ALARM SPEAKERS, TONES, AND STROBES ARE IN-SYNC WITH ALL ADJACENT AREAS BEYOND THE AREA OF WORK. WHEN WORK IS COMPLETE, TEST EXISTING FIRE ALARM SYSTEM IN WORK AREA AND ADJACENT AREAS.	
7. MAKE REPAIRS TO RESOLVE INCORRECT SYSTEM OPERATIONS AT NO ADDITIONAL COST.	
8. THE FIRE ALARM SYSTEM VENDOR/CONTRACTOR SHALL TERMINATE, TEST AND PROGRAM ALL NEW FIRE ALARM DEVICES. COORDINATE WITH COR.	
9. CONNECT SPRINKLER SYSTEM SUPERVISORY DEVICES TO THE FIRE ALARM SYSTEM. COORDINATE LOCATION WITH THE SPRINKLER CONTRACTOR.	
10. CONNECT ALL ELECTROMAGNETIC DOOR HOLD OPEN DEVICES TO THE FIRE ALARM SYSTEM. COORDINATE WITH THE DOOR HARDWARE CONTRACTOR.	
11. PROVIDE RELAY CONTROL MODULES FOR PACS, COORDINATE WITH PHYSICAL ACCESS CONTROL SYSTEM (PACS), CONTRACTOR AND COR.	
12. PROVIDE RELAY CONTROL MODULES FOR COOKING POWER SUPPLY SHUT OFF.	
13. PROVIDE RELAY CONTROL MODULES FOR KITCHEN HOOD FIRE SUPPRESSION SYSTEM.	
14. THE OPERABLE PART OF A MANUAL ACTUATED ALARM INITIATING DEVICE SHALL BE NOT LESS THAN 42" (1.07M) AND NOT MORE THAN 48" (1.22M) FROM FINISH FLOOR.	
15. FOR LOCATION (CORRIDOR, ROOM OR ADJACENT SPACE) WITH TWO OR MORE VISIBLE FIRE ALARM NOTIFICATION APPLIANCES WITHIN THE FIELD OF VIEW, PROGRAM VISIBLE TO FLASH IN SYNCHRONIZATION.	

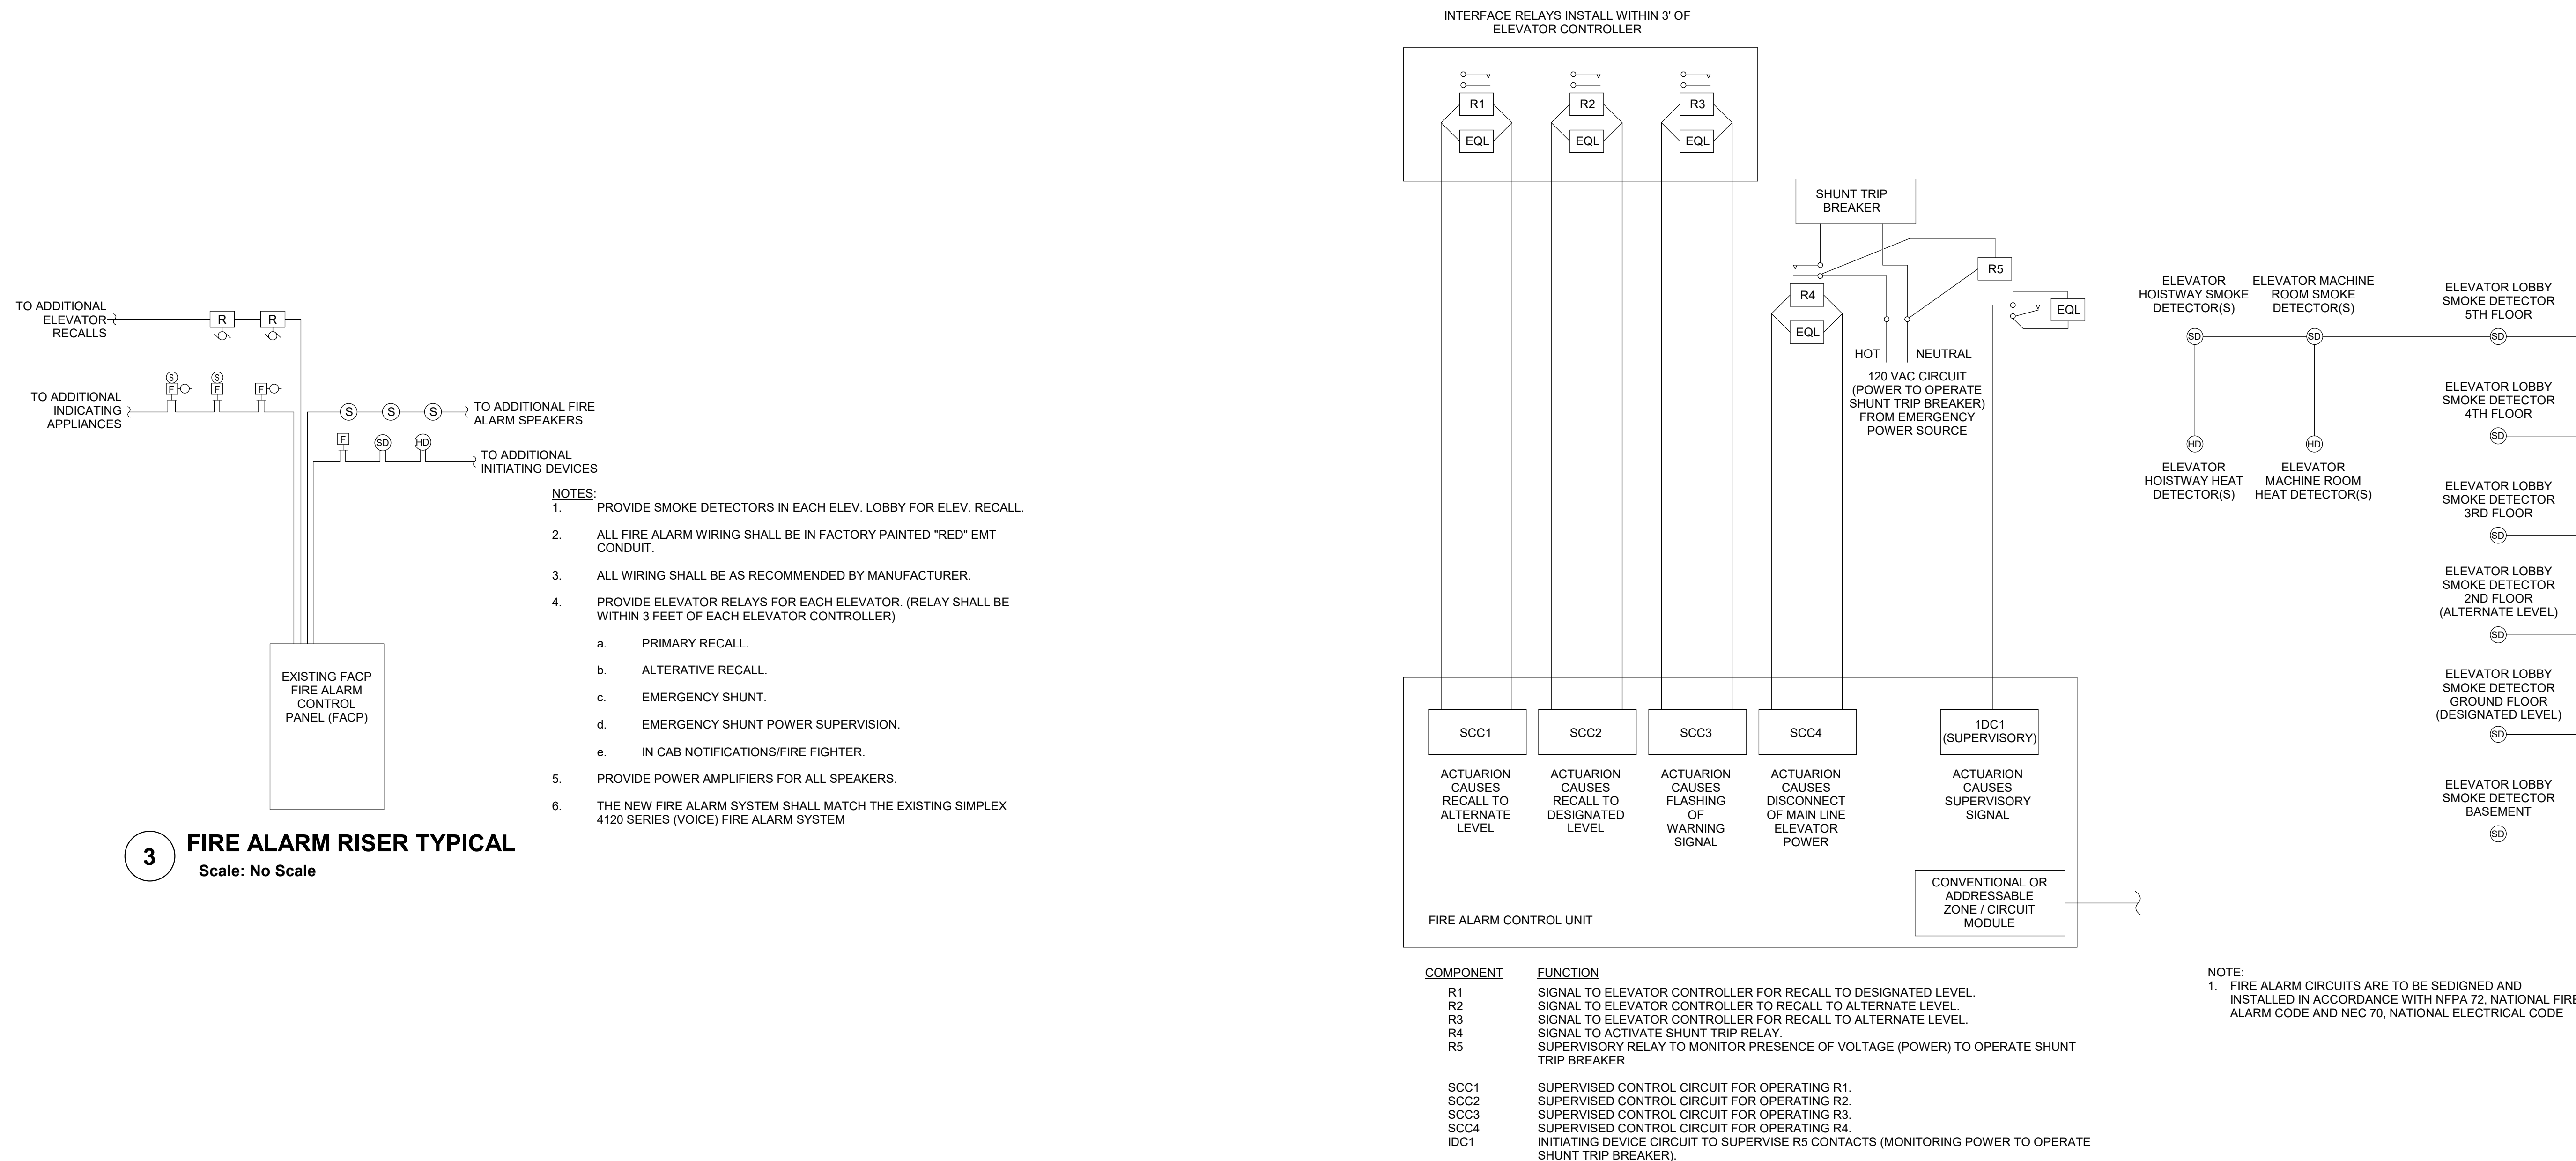

FIRE ALARM ABBREVIATIONS LIST			
ACC	ACCESSIBLE	MISC	MISCELLANEOUS
ACLG	ABOVE CEILING	MT	MOUNT
AE	ARCHITECT/ENGINEER		
AF	ABOVE FINISHED FLOOR	N	NEW DEVICES
AHJ	AUTHORITY HAVING JURISDICTION	NAC	NETWORK APPLIANCE CIRCUIT
AHU	AIR HANDLING UNIT		PANEL
AL	ALUMINUM	NCA	NETWORK CONTROL ANNUNCIATOR
ALT	ALTERNATE	NS	NO SCALE
AMP	AMPERE	NTS	NOT TO SCALE
APPRX	APPROXIMATELY		
ARCH	ARCHITECT, ARCHITECTURAL	OC	ON CENTER
AUTO	AUTOMATIC	OD	OUTSIDE DIAMETER
AUX	AUXILIARY	OH	OVERHEAD
AV	AUDIO VISUAL		
BOD	BASIS OF DESIGN	PA	PUBLIC ADDRESS
C	CONDUIT	PB	PULL BOX OR PUSHBUTTON
CAB	CABINET	PV	POST INDICATING VALVE
CD	CANDELA	PVC	POLYVINYL CHLORIDE (CONDUIT)
CD	CONSTRUCTION DOCUMENTS	QTY	QUANTITY
CF	CONTRACTOR-FURNISHED	R	REMOVE AND REPLACE IN NEW
CKT	CIRCUIT		LOCATION
CLG	CEILING	RCP	REFLECTED CEILING PLAN
CO	CONTRACTING OFFICE	REQD	REQUIRED
COR	CONTRACTING OFFICER REPRESENTATIVE	RGS	RIGID GALVANIZED STEEL
		RM	ROOM
dB	DECIBEL	SC	SURFACE CONDUIT
DN	DOWN	SF	SQUARE FEET/FOOT
DVC	DIGITAL VOICE COMMAND	SHT	SHEET
		SI	INTERNATIONAL SYSTEM OF UNITS
E	EXISTING DEVICES	SIM	SIMILAR
ELEV	ELEVATOR	SPEC	SPECIFICATION
ETR	EXISTING TO REMAIN	SPKR	SPEAKER
FA	FIRE ALARM	SR	SURFACE RACEWAY
FACP	FIRE ALARM CONTROL PANEL	SS	STAINLESS STEEL
FAAP	FIRE ALARM ANNUNCIATOR PANEL	STD	STANDARD
FAGAP	FIRE ALARM GRAPHIC ANNUNCIATOR PANEL	SURF	SURFACE MOUNTED
FO	FIBER OPTIC	SYM	SYMMETRICAL
		SYS	SYSTEM
J-BOX	JUNCTION BOX	TC	TIMECLOCK
MAX	MAXIMUM	TEL	TELEPHONE
MC	MECHANICAL CONTRACTOR	TP	TWISTED PAIR
MCL	METAL-CLAD (CONDUIT)	TPS	TWISTED PAIR SHIELDED
MECH	MECHANICAL	TR	TAMPER RESISTANT
MFR	MANUFACTURER	TYP	TYPICAL
MIN	MINIMUM	UL	UNDERWRITER'S LABORATORY
		UTP	UNSHIELDED TWISTED PAIR

2 FIRE ALARM INTERFACE WITH ELEVATORS
Scale: No Scale

FULLY SPRINKLERED
100% BID DOCUMENTS

CONSULTANTS:			PROJECT MANAGER		Office of Construction and Facilities Management		Drawing Title FIRE ALARM GENERAL NOTES, SYMBOL LEGEND, AND RISER		Project Title ELEVATOR UPGRADES IN BUILDINGS 1, 2, 5, 38, 135 & 137		VA PROJECT NUMBER 679-22-100	
					U.S. Department of Veterans Affairs		Location TUSCALOOSA VAMC, VISN 7		Approved		Drawing Number FA001	
Revisions:			2/5/2025		2/5/2025		Date FEBRUARY 6, 2025		Checked JKM		Drawn PDN	
Date			2/5/2025		2/5/2025						Dwg 1 of 1	