



NOTES:


1. The temporary diversion details provided are proposed details. The contractor shall design the temporary diversion based on peak flow data provided in the table below. The temporary diversion plan shall be submitted to the Forest Service for review and concept approval.
2. Use plastic liner or riprap along the entire length and width of the temporary diversion channel.
3. Construct channel at a minimum grade of 0.5 percent.
4. Do not construct with longitudinal joints if using a plastic liner. Bury the upstream edge of the liner a minimum of 6" deep and secure with riprap or sandbags.
5. Use pipe to divert the stream channel during construction. Refer to Section 157. Compact temporary culvert backfill using one of the methods listed in Subsection 204.11(a).
6. Provide geotextile filter conforming to Subsection 714.0l(a).

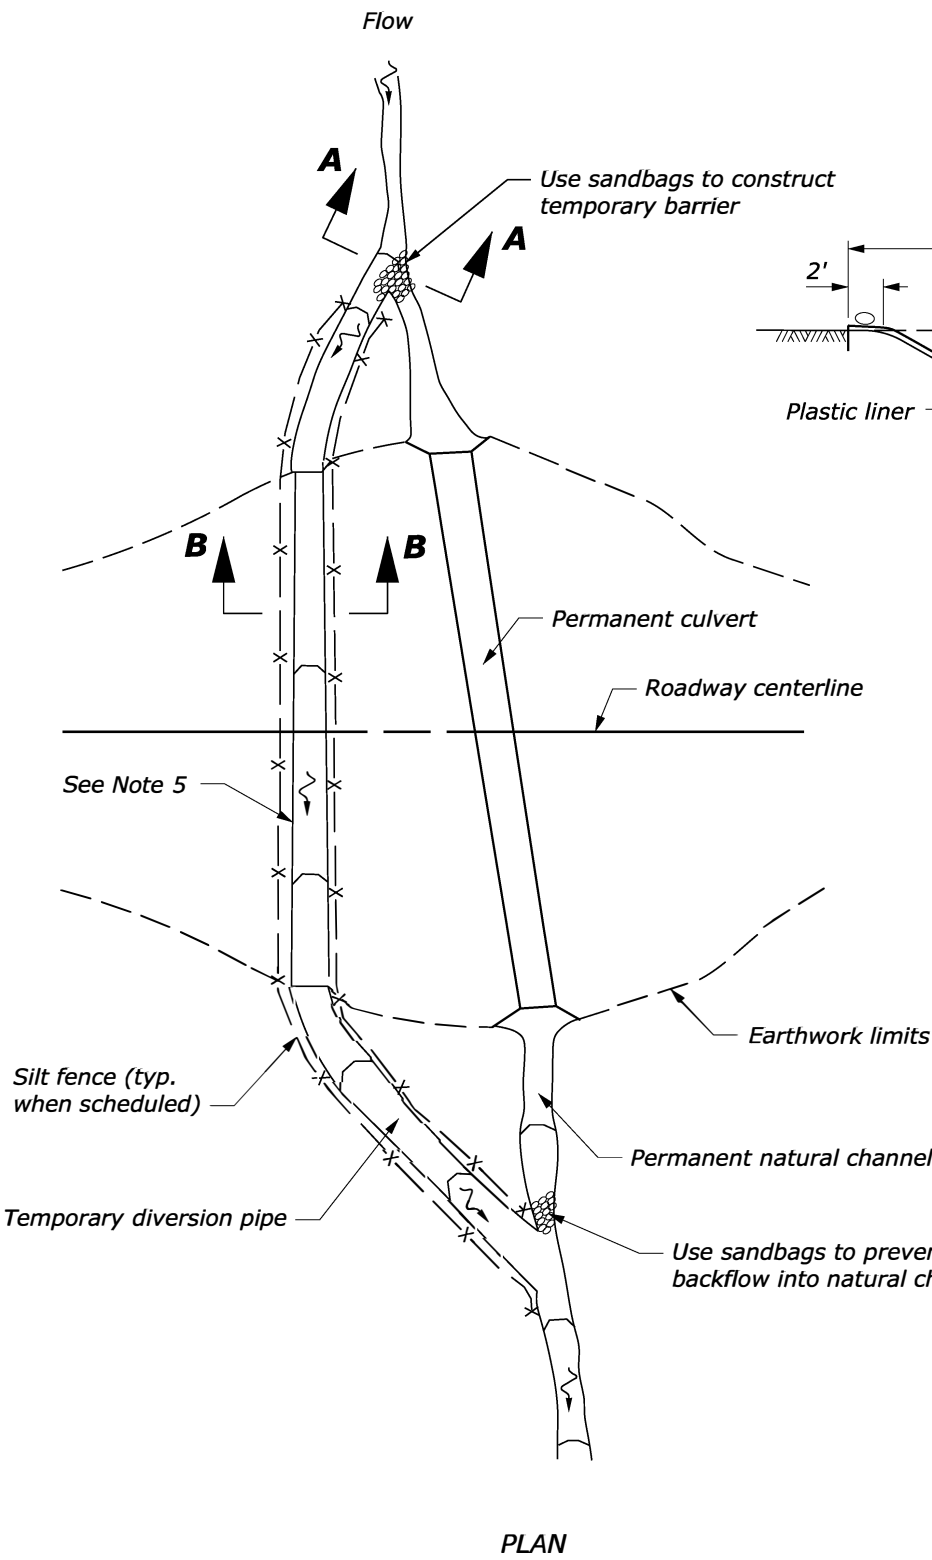


DIVERSION CHANNEL

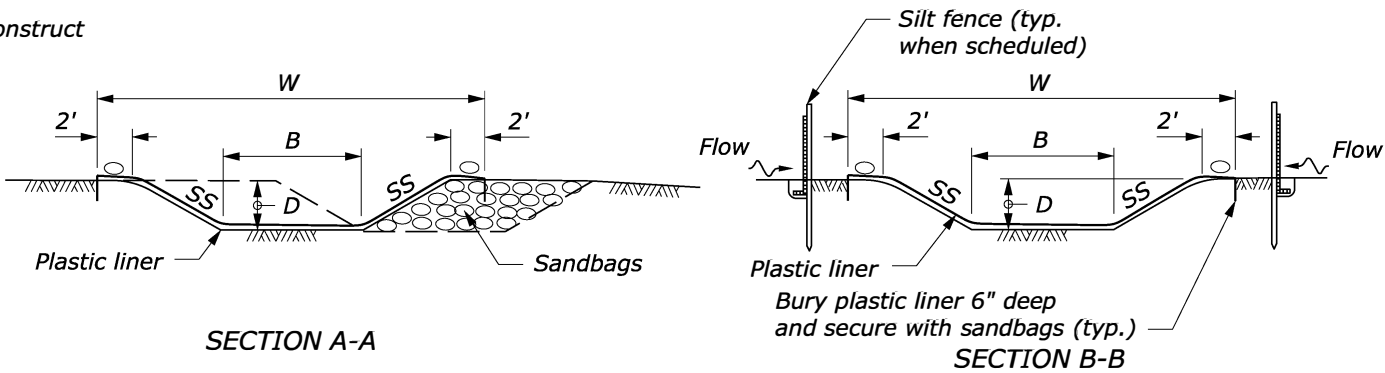

PLASTIC LINED DIVERSION CHANNEL

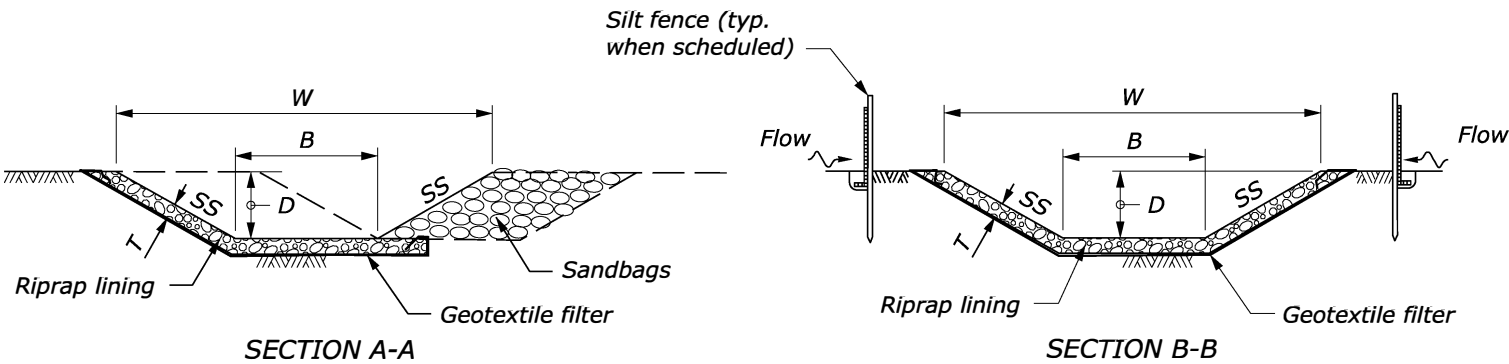

RIPRAP LINED DIVERSION CHANNEL

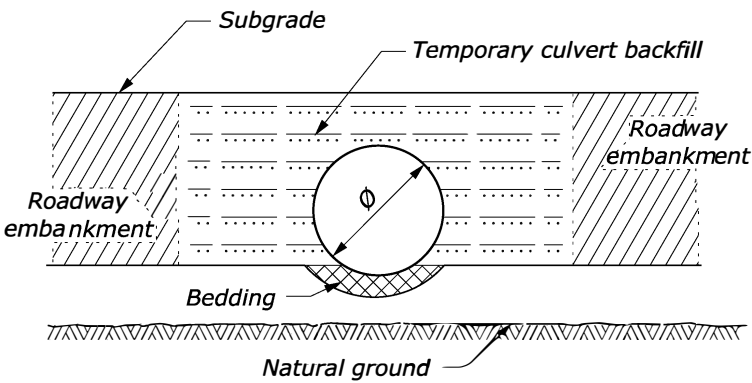

TEMPORARY CULVERT

Event (yr)	Adjusted Peak Flows (cfs)
2	140.25
5	249.75
10	347.25
25	501.00
50	639
100	795.00
500	1267.50

KIMBALL CREEK: ADJUSTED PEAK FLOWS FOR POND AND WETLAND AREAS

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
OFFICE OF FEDERAL LANDS HIGHWAY

FLH STANDARD

TEMPORARY DIVERSION
CHANNELS

STANDARD
157-5A