

NOTES:

INSTALL NEW COOLING TOWER AND ALL ASSOCIATED PIPING.
CONNECT TO EXISTING PIPING. REUSE EXISTING SUPPORT STEEL.

SEE DRAWING M-1 FOR NEW STEEL. NEW STEEL TO BE
INSTALLED ON TOP OF EXISTING.

TOP OF UNIT TO EXTEND ABOVE HEIGHT OF ROOF SCREEN.

NEW UNITS MAY BE INSTALLED ON EXISTING STEEL WITH A MAX.
18" CANTILEVER ON EACH SIDE.

FOR CONTROL CIRCUITS FOR THE SIX (6) NEW
HP FANS, SHALL BE REPLACED WITH NEMA SIZE 2
STARTERS. STARTERS SHALL MATCH EXISTING EQUIPMENT
MOTOR CONTROL CENTER.


PROTECT ROOF DURING REMOVAL & INSTALLATION PROCESS BY COVERING
OF AREAS WITH 40-60 MIL POLY SHEET AND THEN COVER THESE AREAS
WITH 1/2" THICK MIN. FIRE-RATED PLYWOOD.

MAKE-UP LINE TO BE INSULATED. SEE SPECIFICATIONS.

INSTALL NEW WALKING PADS AROUND UNIT PER ROOFING MANUFACTURER'S SPECIFICATIONS.

LEGEND

TO REMAIN
TO BE REMOVED

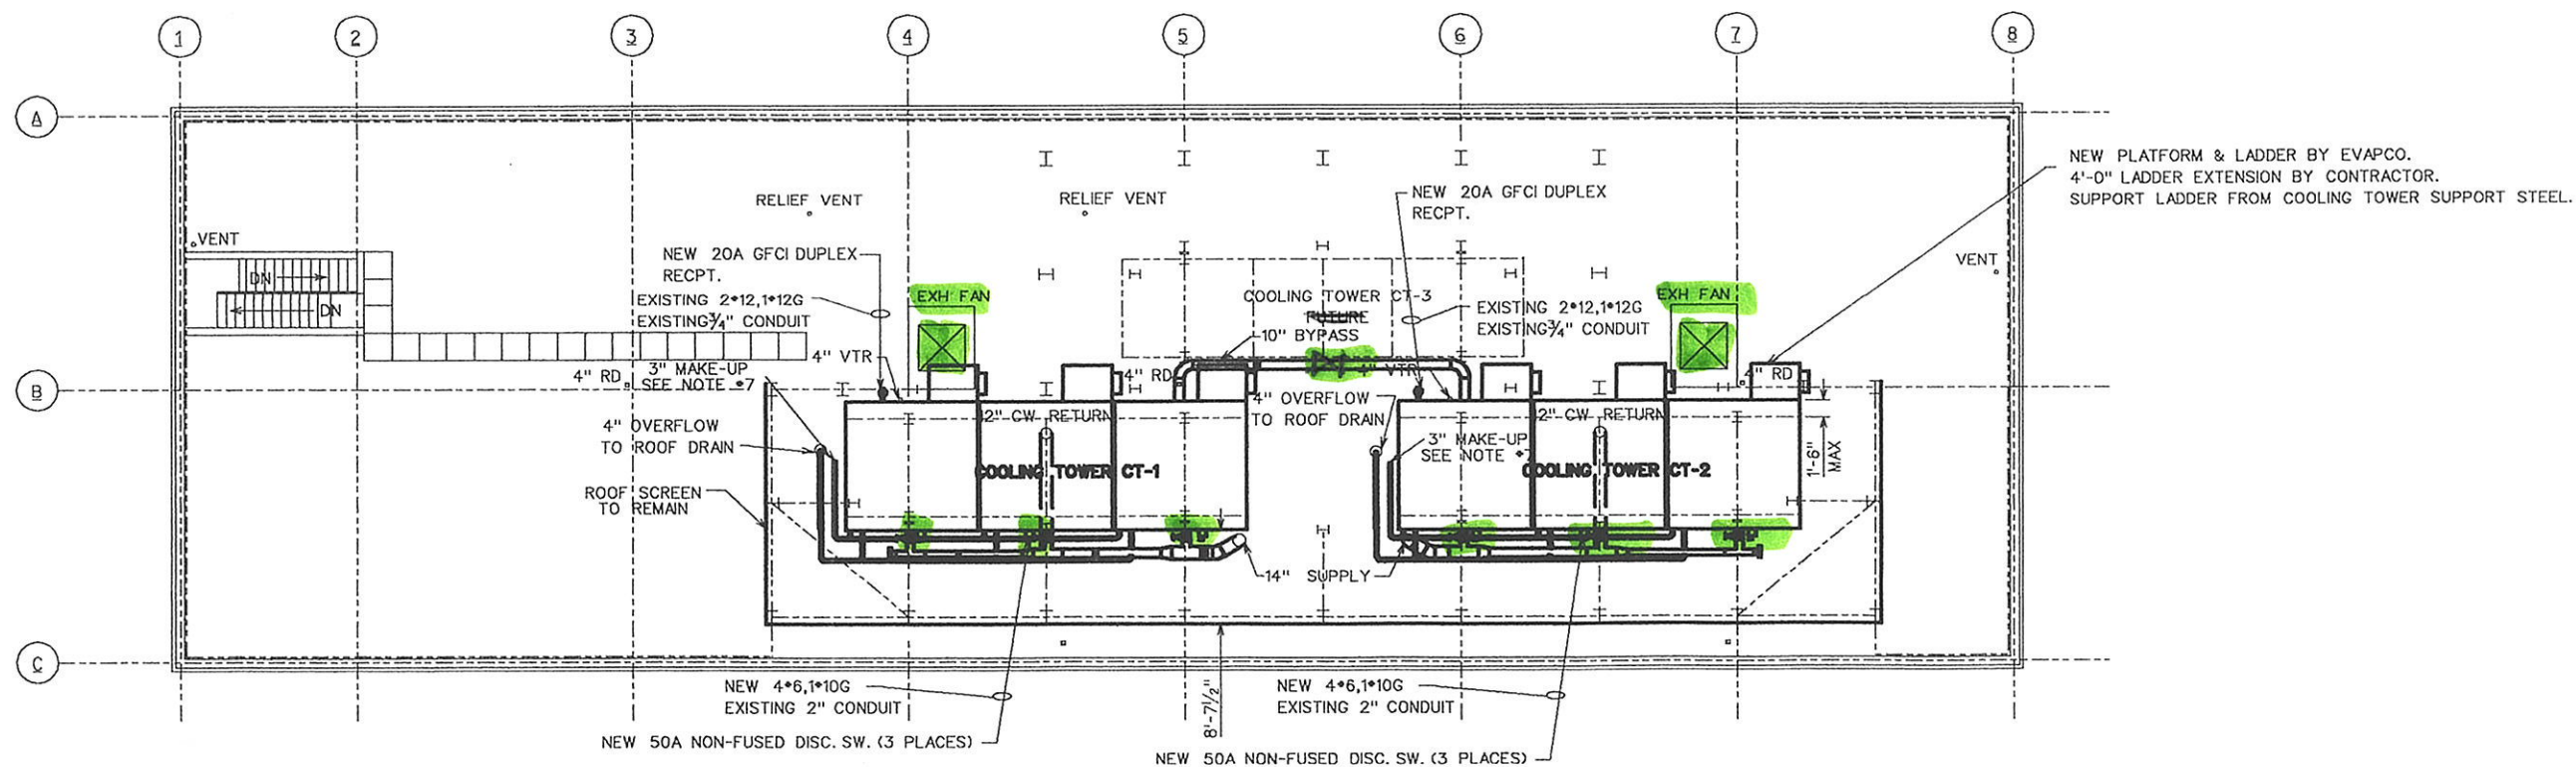

ROOF PLAN

SCALE: 1/8" = 1'-0"
(1mm = 25mm)

COOLING TOWER SCHEDULE													
TYPE	WATER				AMB AIR WB F°	FAN HP		FAN TYPE	ELECTRICAL CHAR V/PH/Hz	BASIS OF DESIGN	MODEL NO	OPERATING WEIGHT LB	REMARKS
	NO. CELLS	GPM/CELL	WLT F°	LWT F°		HP	QTY						
INDUCED DRAFT	3	1200.0	95.0	85.0	78.0	20 EA	3	PROPELLER	460V 3PH 60Hz	EVAPCO	AT 312-336	42,510	BYPASS CONNECTION 10"
INDUCED DRAFT	3	1200.0	95.0	85.0	78.0	20 EA	3	PROPELLER	460V 3PH 60Hz	EVAPCO	AT 312-336	42,510	BYPASS CONNECTION 10"